

Features

- Trifab® VersaGlaze® 451/451T is 4-1/2" (114.3) deep with a 2" (50.8) sightline
- Front, Center, Back or Multi-Plane glass applications
- Flush glazed from either the inside or outside
- Screw Spline, Shear Block, Stick or Continuous Head and Sill fabrication
- Screw Spline Pre-Glazed option
- SSG / Weatherseal option
- IsoLock® lanced and debrided thermal break option with Trifab® VersaGlaze® 451T
- Infill options up to 1-1/8" (28.6) thickness
- Permanodic® anodized finishes option
- Painted finishes in standard and custom choices

Optional Features

- Acoustical rating per AAMA 1801 and ASTM E 1425
- Project specific U-factors (See Thermal Charts)
- Integrates with Versoleil® SunShade Outrigger System and Horizontal Single Blade System
- Profit\$Maker® Plus die sets available

Product Applications

- Storefront, Ribbon Window, Punched Openings or Pre-Glazed
- Single-span
- Integrated entrance framing allowing Kawneer standard entrances or other specialty entrances to be incorporated
- Kawneer windows or GLASSvent® Windows for Storefront Framing are easily incorporated

For specific product applications,
consult your Kawneer representative.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

PICTORIAL VIEWS.....	5-10
CENTER	11-27
CENTER (LARGE MISSLE IMPACT).....	28-30
FRONT	31-45
BACK	47-53
MULTI-PLANE	55-61
AIR/VAPOR BARRIER TIE-IN OPTION	62
CHARTS (WIND LOAD, DEADLOAD, END REACTION & THERMAL)	63-117

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Metric (SI) conversion figures are included throughout these details for reference. Numbers in parentheses () are millimeters unless otherwise noted.

The following metric (SI) units are found in these details:


m – meter
cm – centimeter
mm – millimeter
s – second
Pa – pascal
MPa – megapascal

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.


The split vertical in the **Screw Spline** system allows a frame to be installed from unitized assemblies. Screws are driven through the back of the verticals into splines extruded in the horizontal framing members. The individual units are then snapped together to form a complete frame.

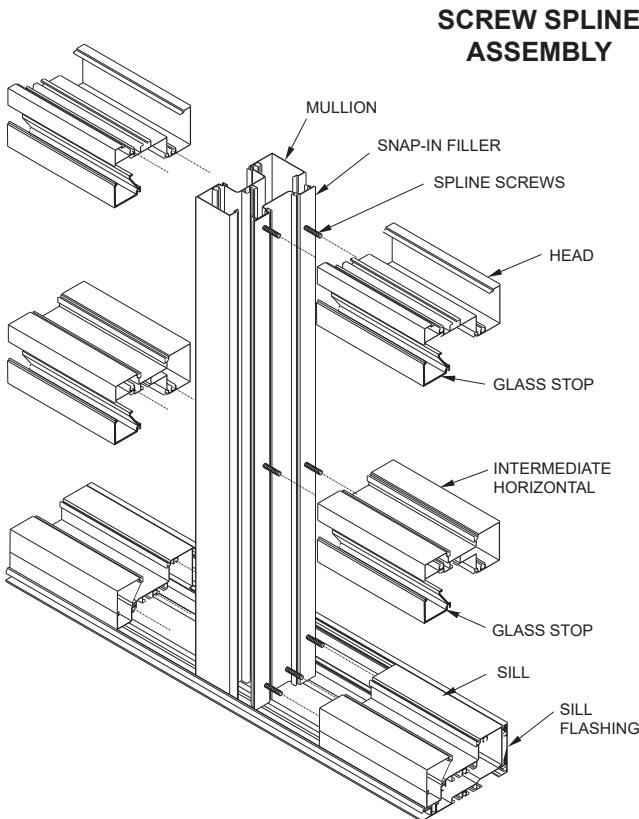

The **Shear Block** system of fabrication allows a frame to be pre-assembled as a single unit. Horizontals are attached to the verticals with shear blocks.

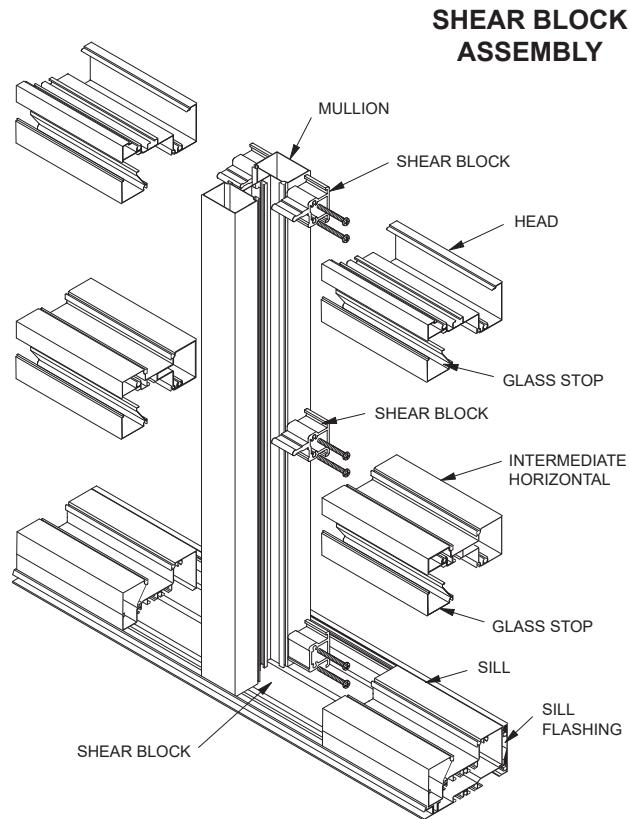

STICK ASSEMBLY

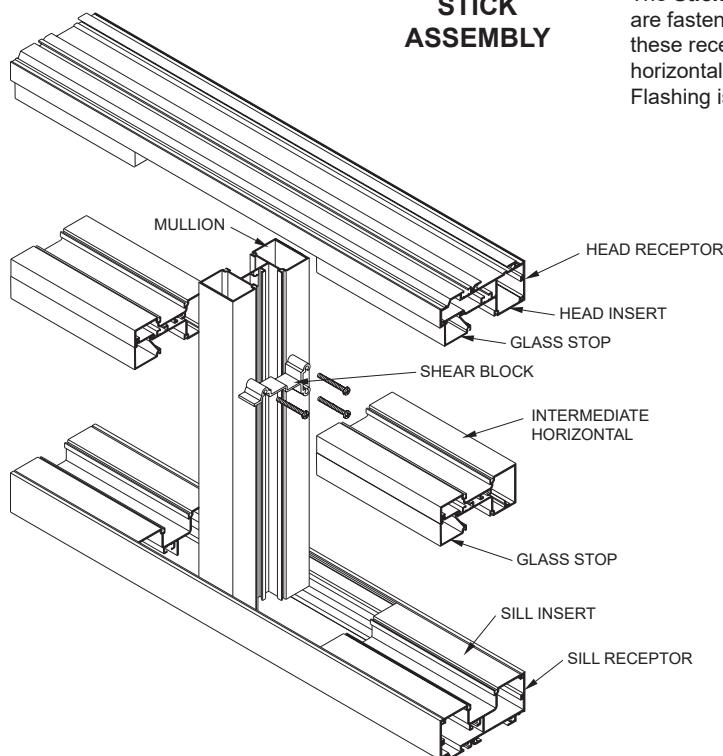


The **Stick** system allows on-site construction. Head and sill receptors are fastened to the surround. Vertical mullions are then installed in these receptors and are held in place by snap-in inserts. Intermediate horizontal members are attached to the verticals with shear blocks. Flashing is not required.



NOTE:

If the end reaction of the mullion (mullion spacing (ft.) times height (ft.) times specified wind load (psf) divided by two) is more than 500 lbs., the optional mullion anchors must be used. (See page 18)

The split vertical in the **Screw Spline** system allows a frame to be installed from unitized assemblies. Screws are driven through the back of the verticals into splines extruded in the horizontal framing members. The individual units are then snapped together to form a complete frame.

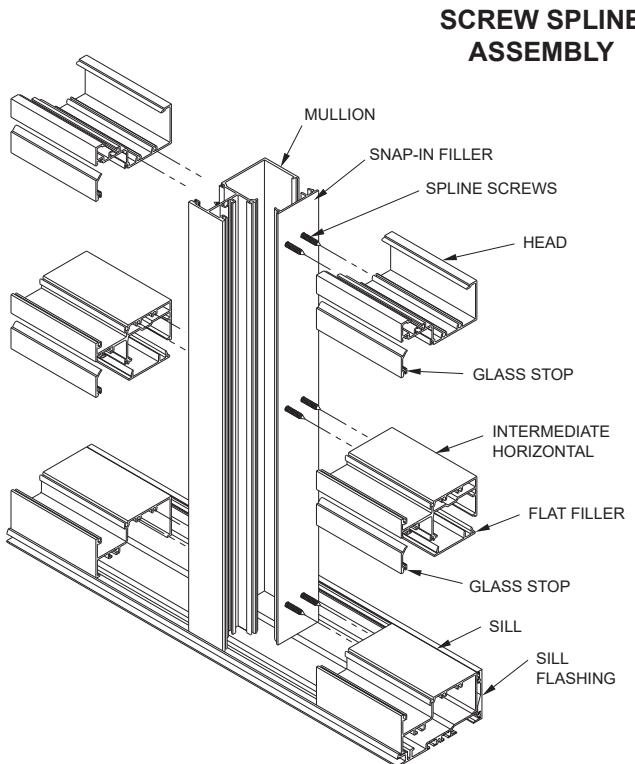

The **Shear Block** system of fabrication allows a frame to be pre-assembled as a single unit. Horizontals are attached to the verticals with shear blocks.

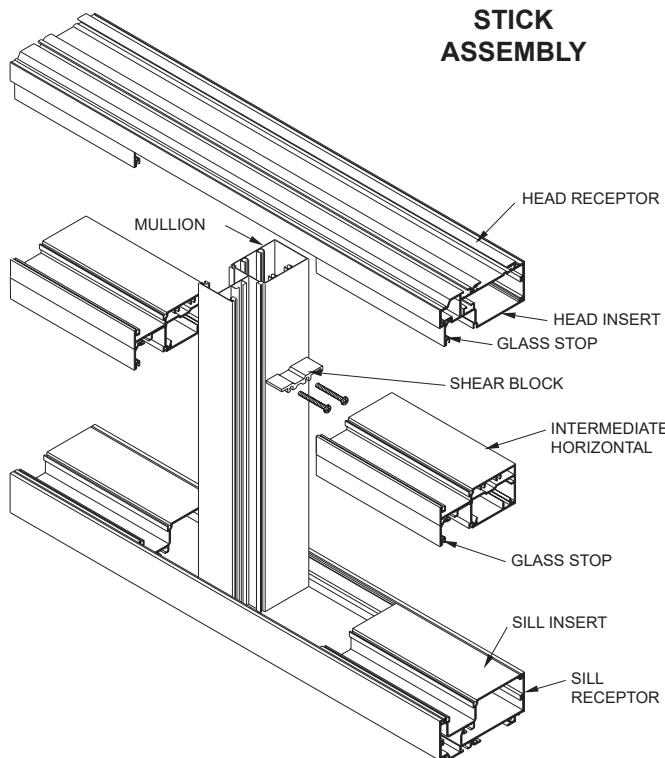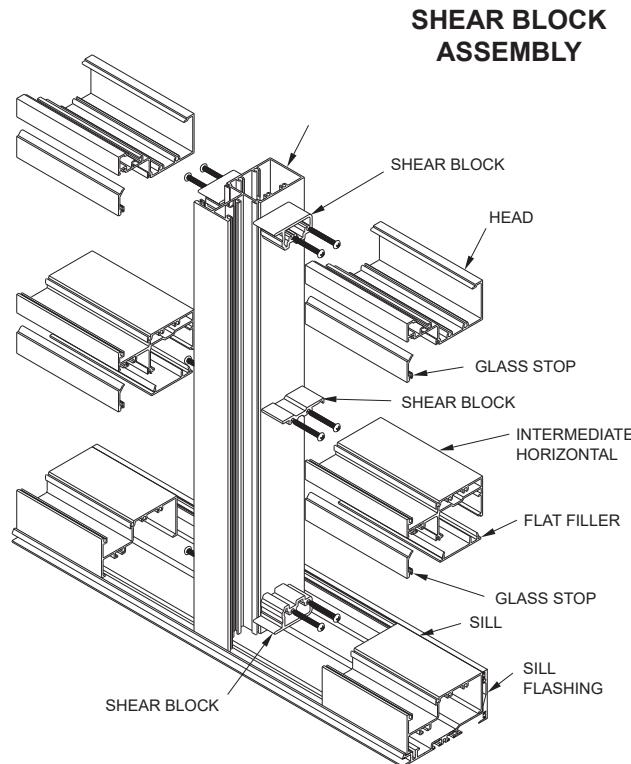

The **Stick** system allows on-site construction. Head and sill receptors are fastened to the surround. Vertical mullions are then installed in these receptors and are held in place by snap-in inserts. Intermediate horizontal members are attached to the verticals with shear blocks. Flashing is not required.

NOTE:

If the end reaction of the mullion (mullion spacing (ft.) times height (ft.) times specified wind load (psf) divided by two) is more than 500 lbs., the optional mullion anchors must be used. (See page 40)


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

The **Stick** system allows on-site construction. Head and sill receptors are fastened to the surround. Vertical mullions are then installed in these receptors and are held in place by snap-in inserts. Intermediate horizontal members are attached to the verticals with shear blocks. Flashing is not required.

**STICK
ASSEMBLY
(SSG)**

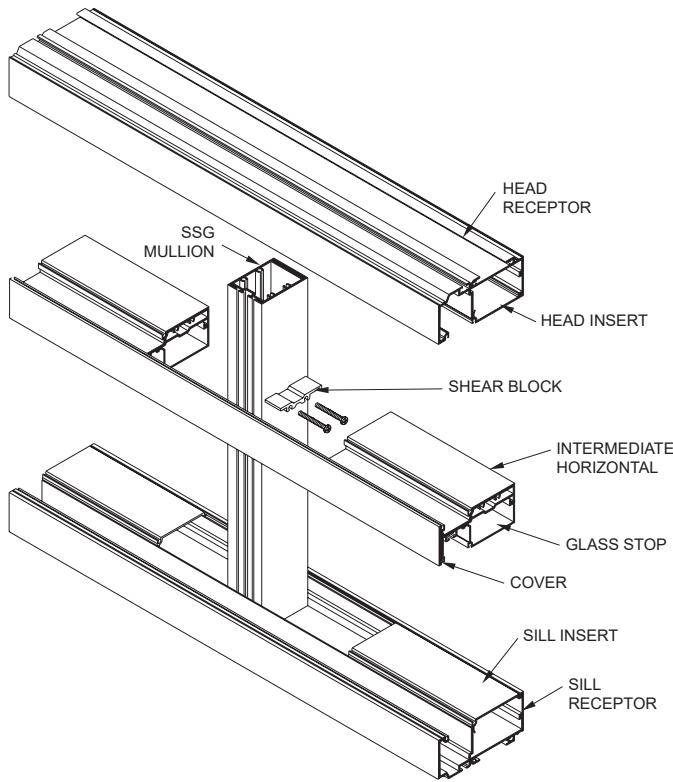

**STICK
ASSEMBLY
(WEATHERSEAL)**

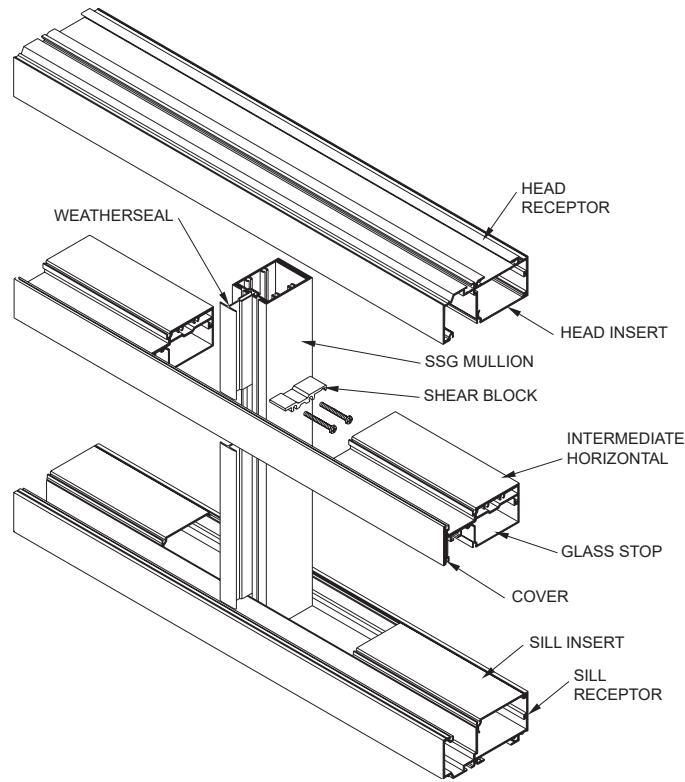


NOTE:


If the end reaction of the mullion (mullion spacing (ft.) times height (ft.) times specified wind load (psf) divided by two) is more than 500 lbs., the optional mullion anchors must be used. (See page 40)

The **CONTINUOUS HEAD AND SILL** punched opening fabrication allows a frame to be pre-assembled and installed as a single unit. Screws are driven through the back of the head and sill members into splines extruded in the vertical framing members. Intermediate horizontals are attached to the verticals with shear blocks.


**CONTINUOUS HEAD AND SILL ASSEMBLY
PUNCHED OPENING
(CAPTURED)**

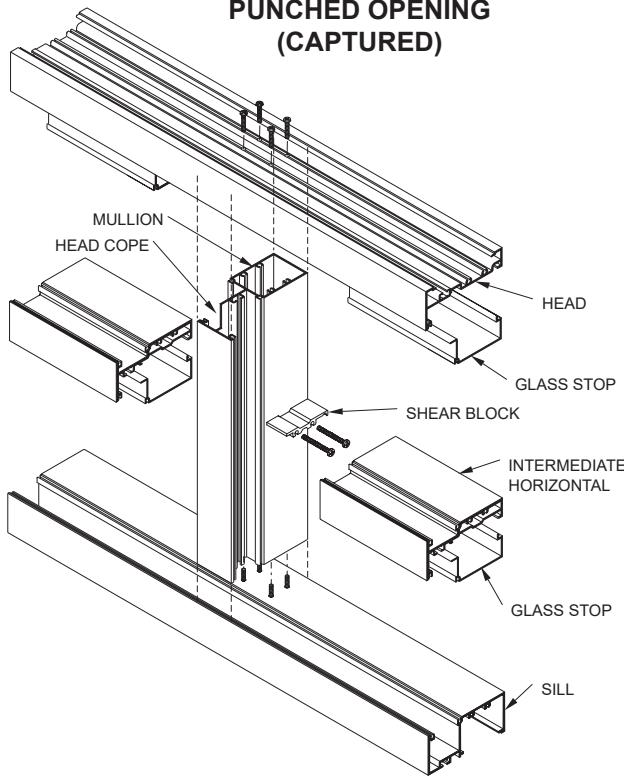

**CONTINUOUS HEAD AND SILL ASSEMBLY
PUNCHED OPENING
(SSG)**

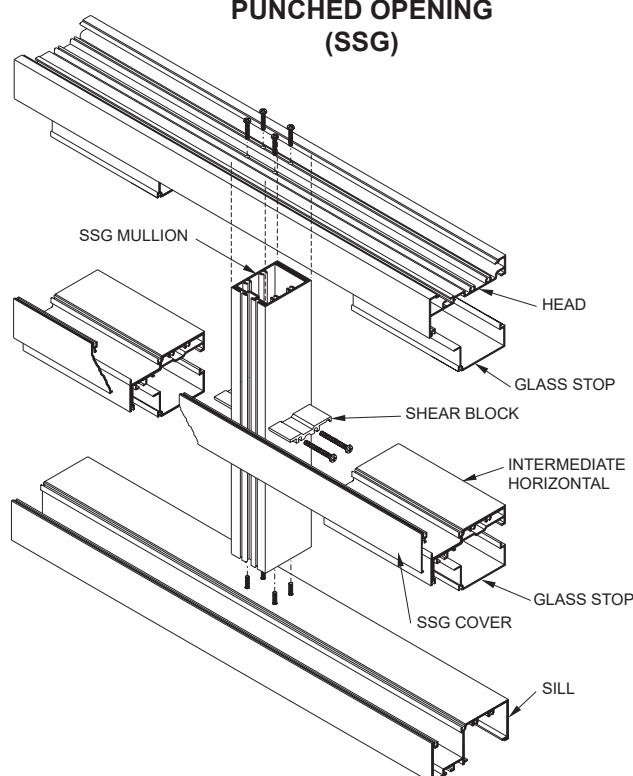

**CONTINUOUS HEAD AND SILL ASSEMBLY
PUNCHED OPENING
(WEATHERSEAL)**

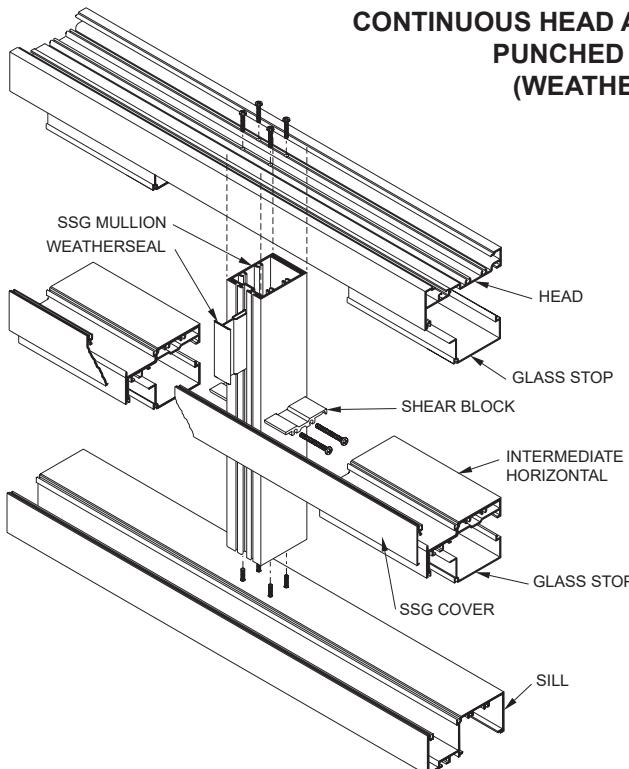


The **Punched Opening** fabrication allows a frame to be pre-punched and installed as a single unit. screws are driven through the back of the head and sill members into splines extruded in the vertical framing members. Intermediate horizontals are attached to the verticals with shear blocks.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.



© 2018, Kawneer Company, Inc.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

The split vertical in the **Screw Spline** system allows a frame to be installed from unitized assemblies. Screws are driven through the back of the verticals into splines extruded in the horizontal framing members. The individual units are then snapped together to form a complete frame.

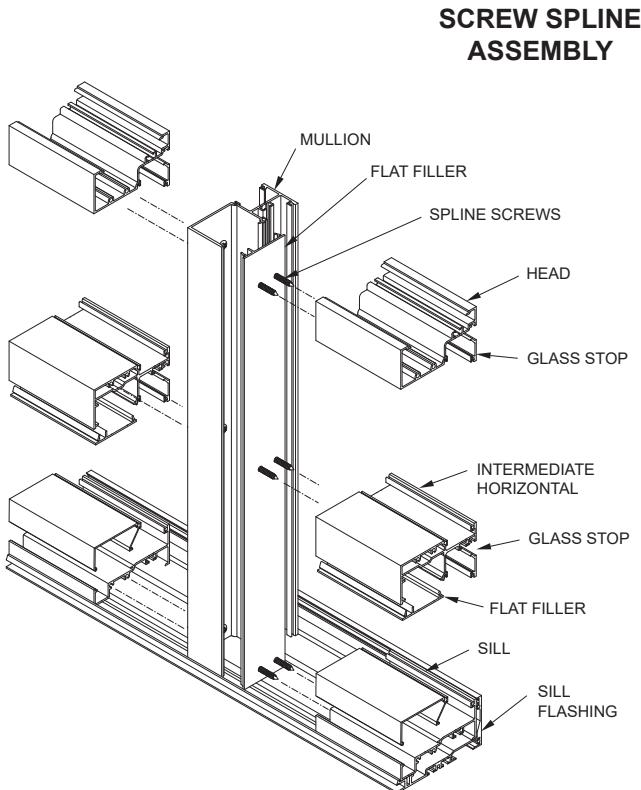

The **Shear Block** system of fabrication allows a frame to be pre-assembled as a single unit. Horizontals are attached to the verticals with shear blocks.

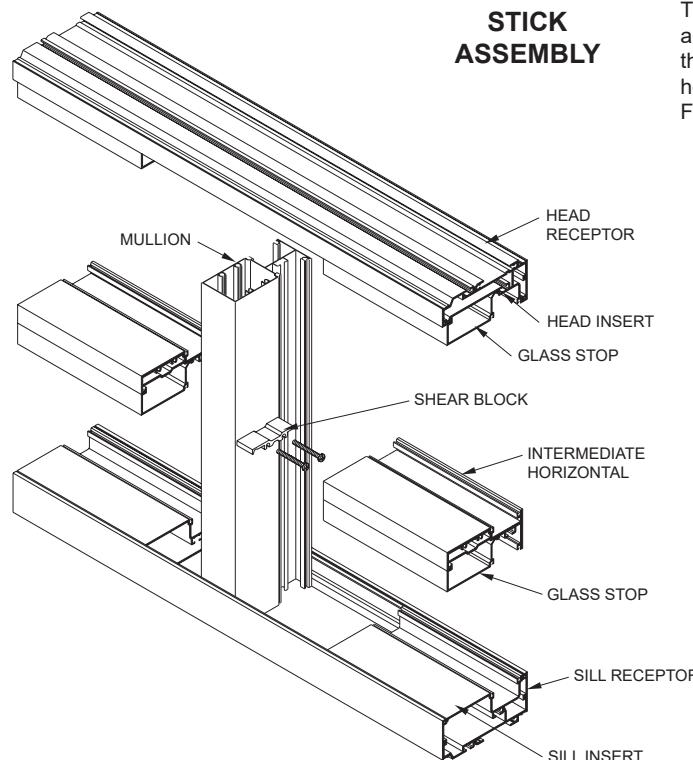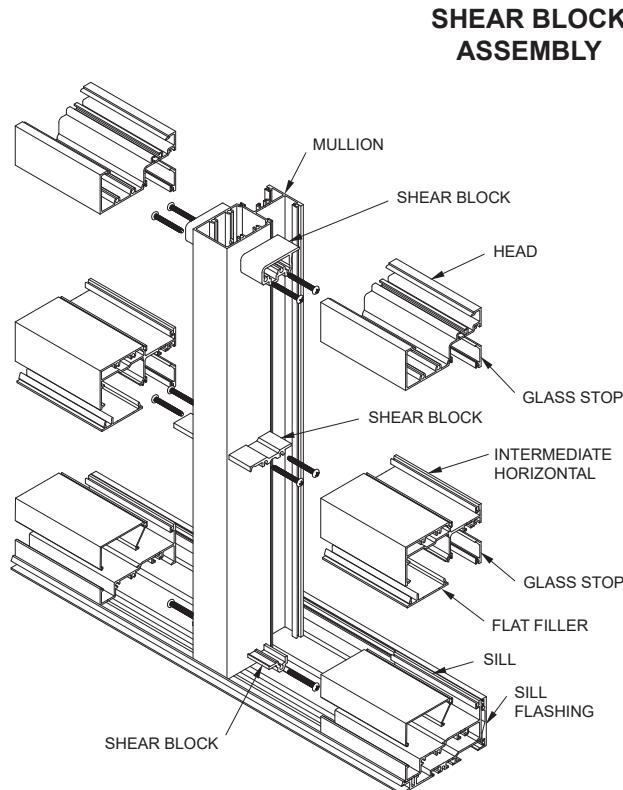



The **Stick** system allows on-site construction. Head and sill receptors are fastened to the surround. Vertical mullions are then installed in these receptors and are held in place by snap-in inserts. Intermediate horizontal members are attached to the verticals with shear blocks. Flashing is not required.

NOTE:

If the end reaction of the mullion (mullion spacing (ft.) times height (ft.) times specified wind load (psf) divided by two) is more than 500 lbs., the optional mullion anchors must be used. (See page 51)



SCREW SPLINE ASSEMBLY

The split vertical in the **Screw Spline** system allows a frame to be installed from unitized assemblies. Screws are driven through the back of the verticals into splines extruded in the horizontal framing members. The individual units are then snapped together to form a complete frame.

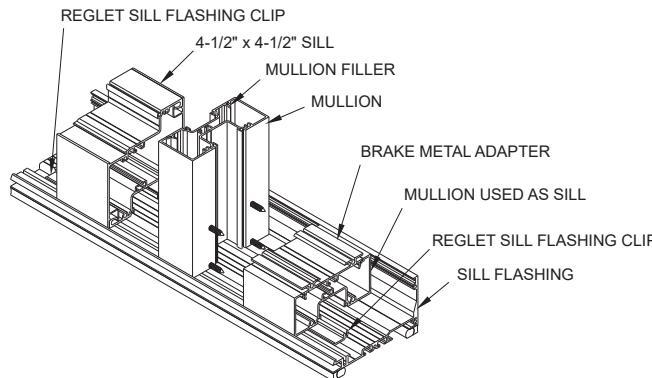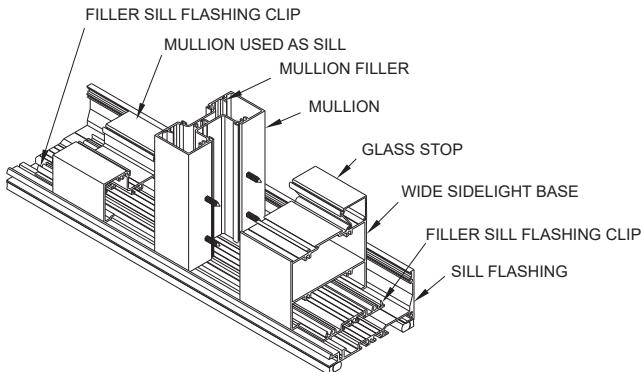

SHEAR BLOCK ASSEMBLY

The **Shear Block** system of fabrication allows a frame to be pre-assembled as a single unit. Horizontals are attached to the verticals with shear blocks.

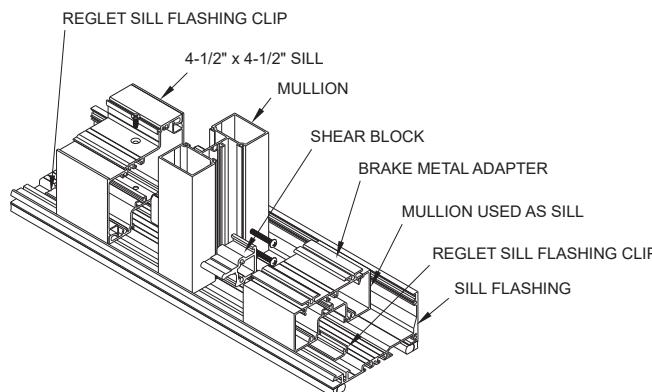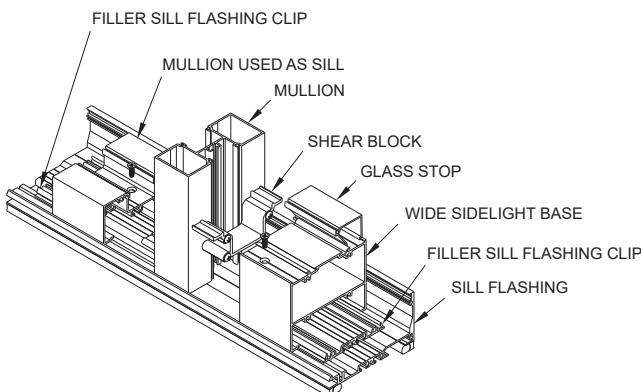

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

BASIC FRAMING DETAILS

(CENTER - Outside Glazed - Stops Up)	12
(CENTER - Inside Glazed - Stops Down)	13
(CENTER - Outside Glazed - Stops Down)	14

PRE-GLAZED FRAMING DETAILS

(CENTER - Outside Glazed - Stops Up)	15
(CENTER - Inside Glazed - Stops Down)	16
(CENTER - Outside Glazed - Stops Down)	17

MISCELLANEOUS FRAMING.....

18-19

CORNERS.....

20

CURVING & TRIM DETAILS

21

ENTRANCE FRAMING

22

ENTRANCE FRAMING (OPEN BACK).....

23

250T/350T/500T INSULPOUR® THERMAL ENTRANCES

24-25

GLASSvent® WINDOW for STOREFRONT FRAMING

26


8225TL THERMAL WINDOW DETAILS.....

27


LARGE MISSLE IMPACT

28-30

Additional information and CAD details are available at www.kawneer.com

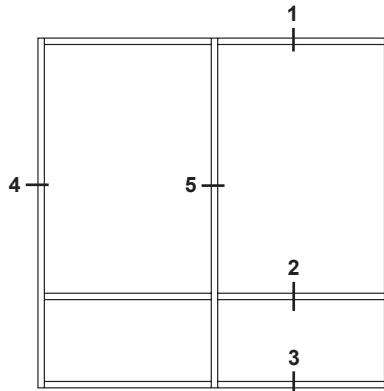


ELEVATION IS NUMBER KEYED TO DETAILS

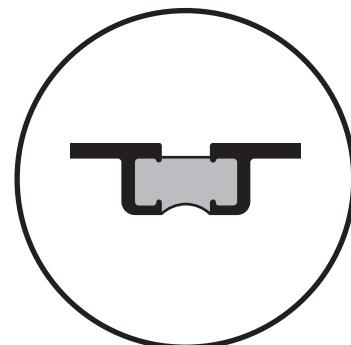

NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS


SCREW SPLINE

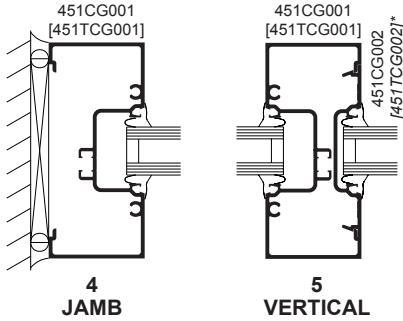

4 JAMB

5 VERTICAL


SHEAR BLOCK

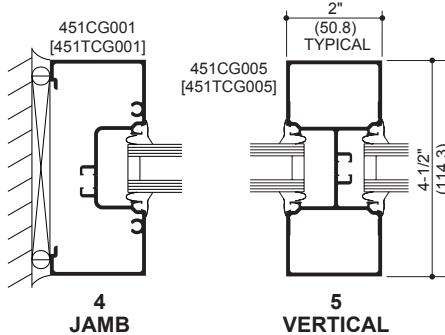

4 JAMB


5 VERTICAL

STICK

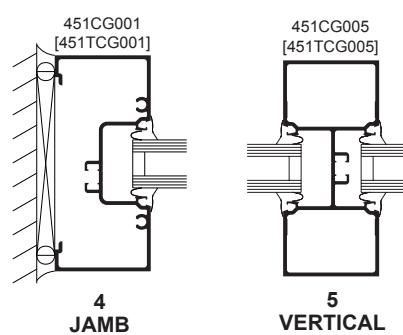


4 JAMB


5 VERTICAL

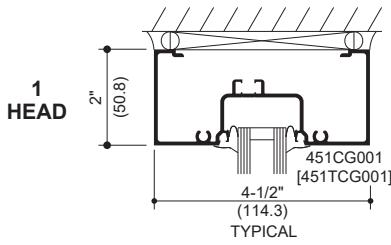


1 HEAD

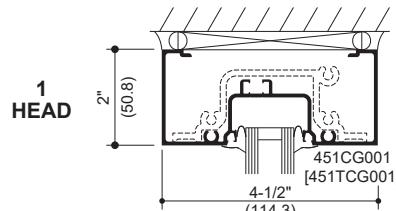


1 HEAD

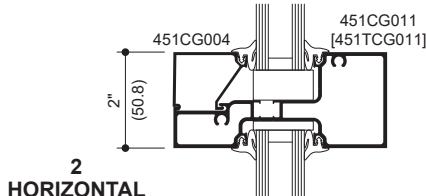



2 HORIZONTAL

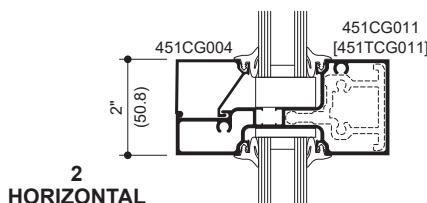


2 HORIZONTAL

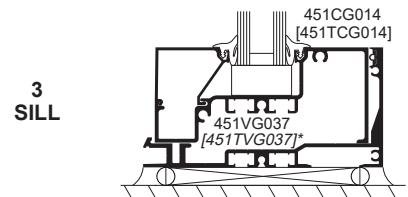


3 SILL

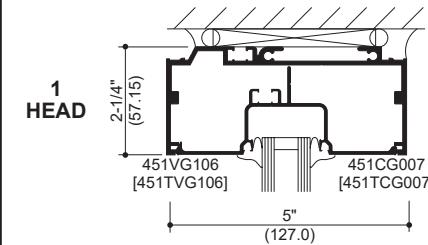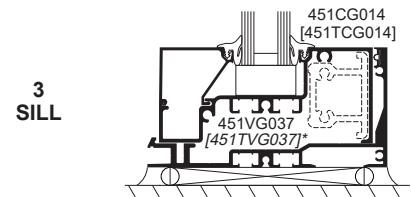

1 HEAD

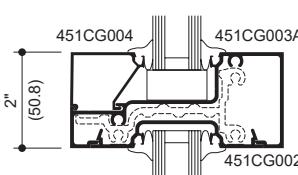

2 HORIZONTAL

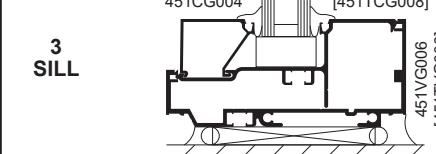

3 SILL

* HP Sill Flashing shown with optional gasket.

* HP Sill Flashing shown with optional gasket.


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

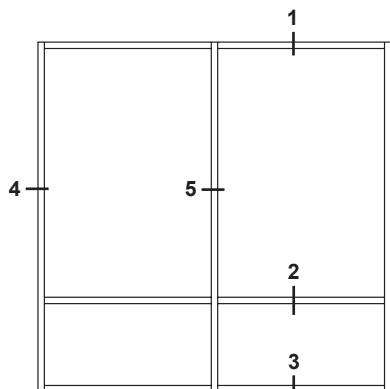


ELEVATION IS NUMBER KEYED TO DETAILS



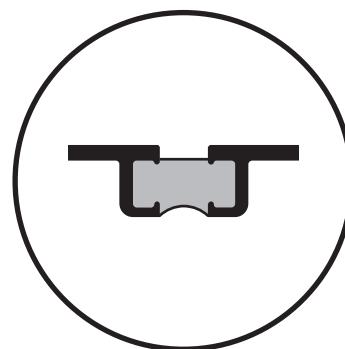


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

SCREW SPLINE

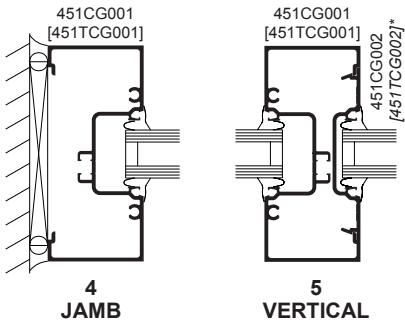


4 JAMB 5 VERTICAL

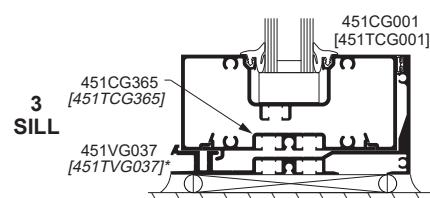
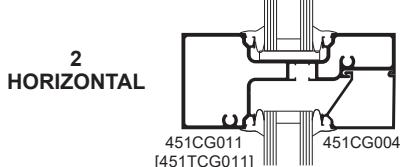
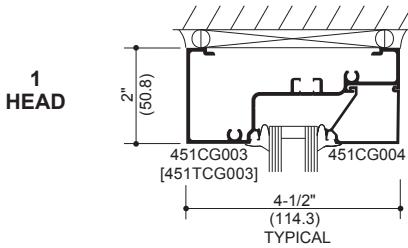


* HP Sill Flashing shown with optional gasket.

SHEAR BLOCK

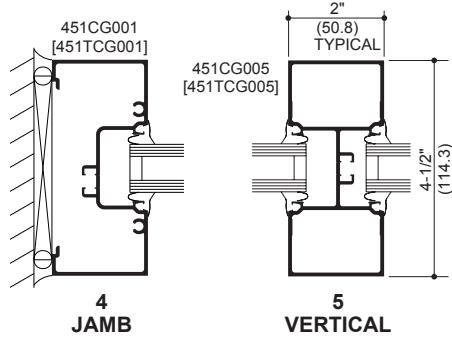


4 JAMB 5 VERTICAL

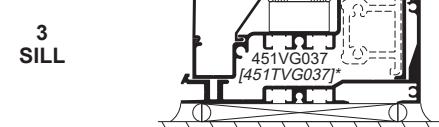
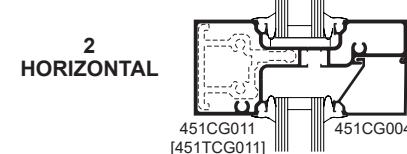
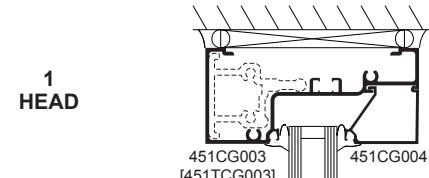


* HP Sill Flashing shown with optional gasket.


STICK

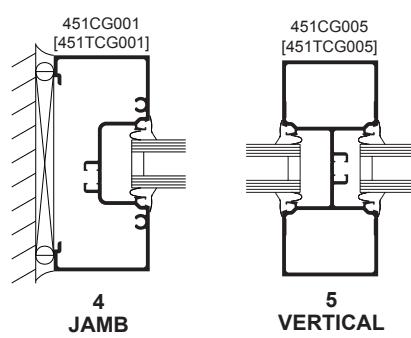


4 JAMB 5 VERTICAL

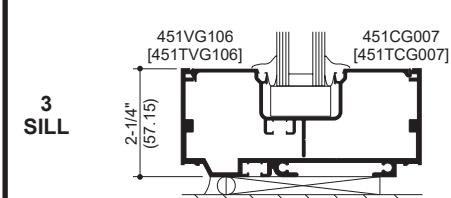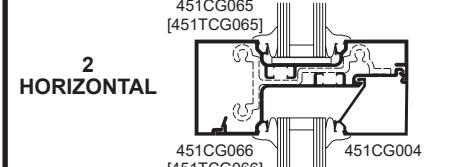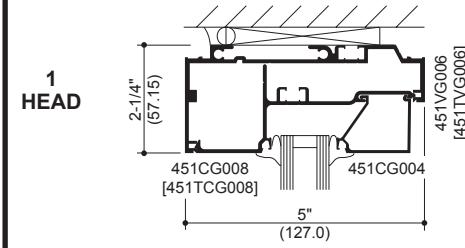

Additional information and CAD details are available at www.kawneer.com

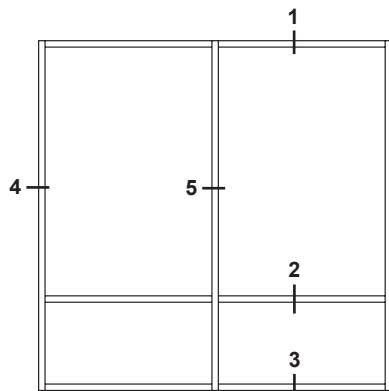


ELEVATION IS NUMBER KEYED TO DETAILS

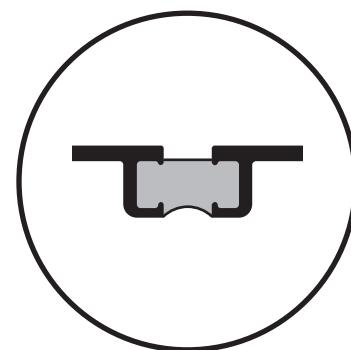

NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS


SCREW SPLINE

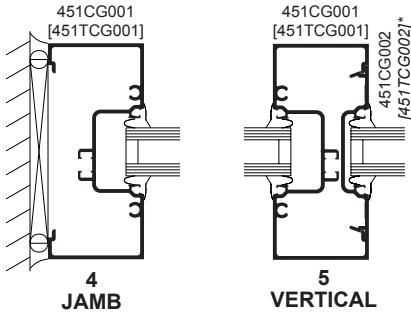

JAMB

VERTICAL


SHEAR BLOCK

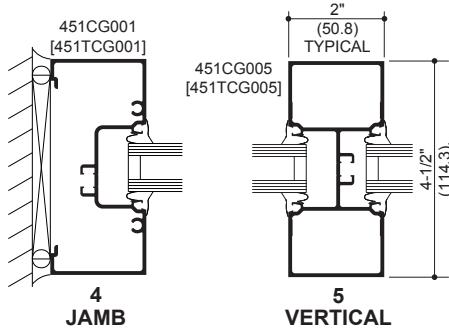

JAMB


VERTICAL

STICK

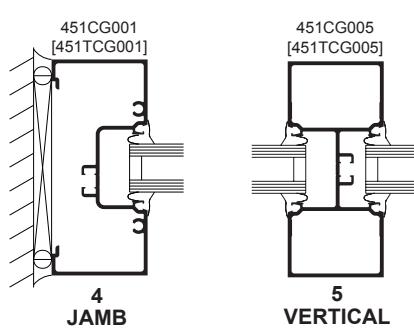


JAMB

VERTICAL

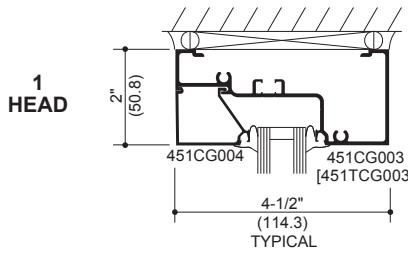


HEAD


HEAD

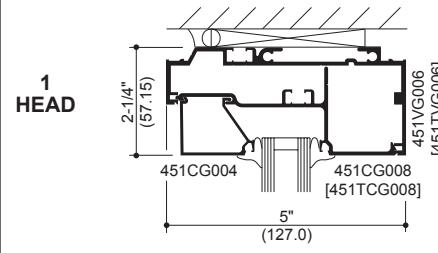


HEAD

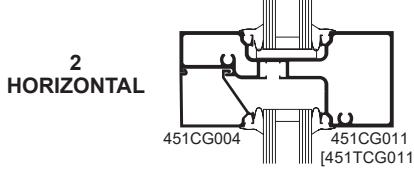


HORIZONTAL

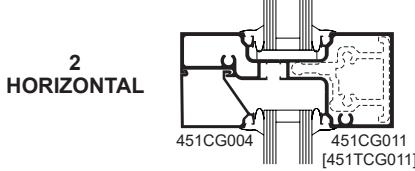


HORIZONTAL

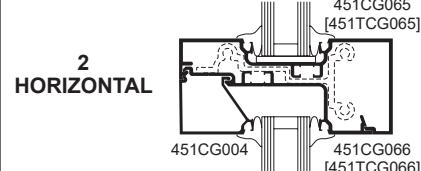


HORIZONTAL

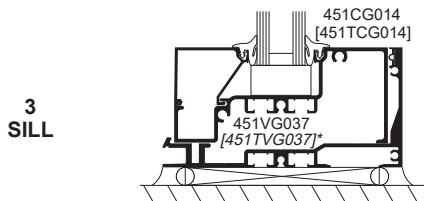

SILL

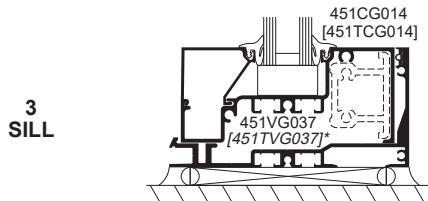

SILL

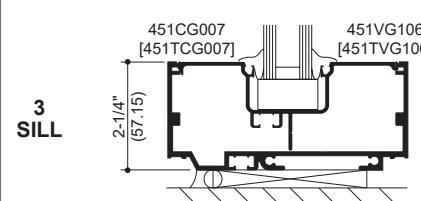

SILL

* HP Sill Flashing shown with optional gasket.

* HP Sill Flashing shown with optional gasket.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

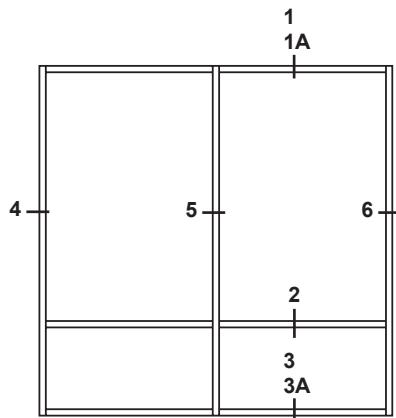


ELEVATION IS NUMBER KEYED TO DETAILS

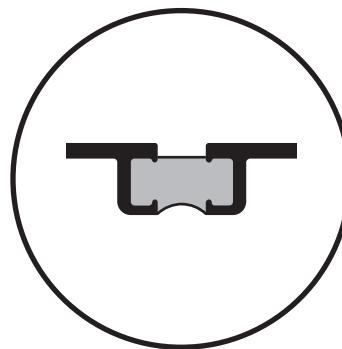


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS


SCREW SPLINE

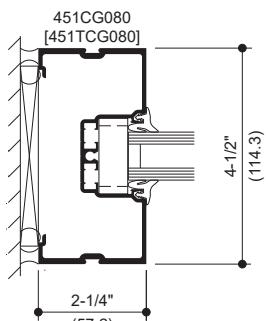


4 JAMB

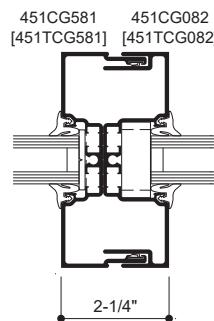


5 VERTICAL

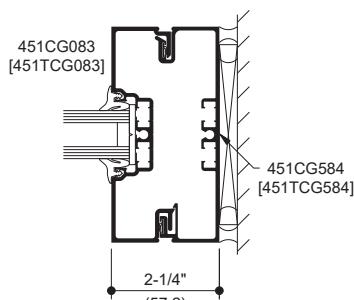


6 JAMB

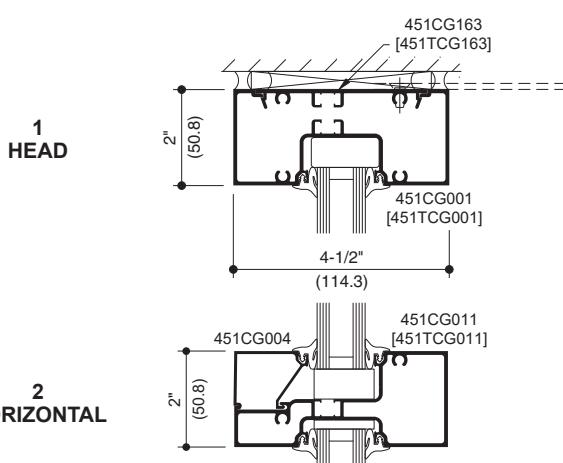


1A
STANDARD
HEAD
COMPENSATING RECEPTOR
(EXTERIOR INSTALLED)

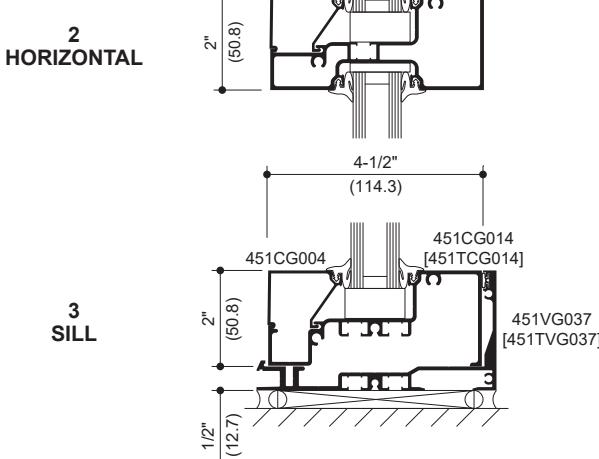


3 SILL

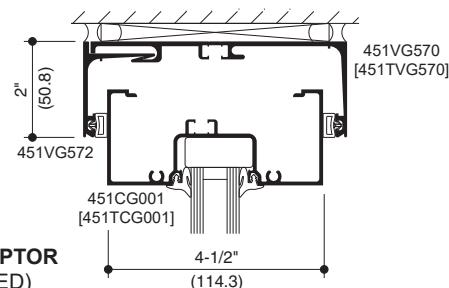


3A
SILL

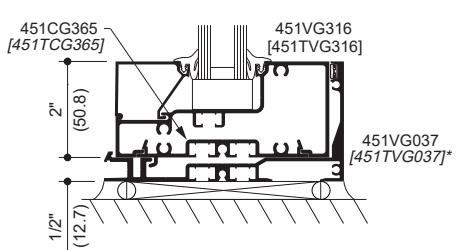

Additional information and CAD details are available at www.kawneer.com

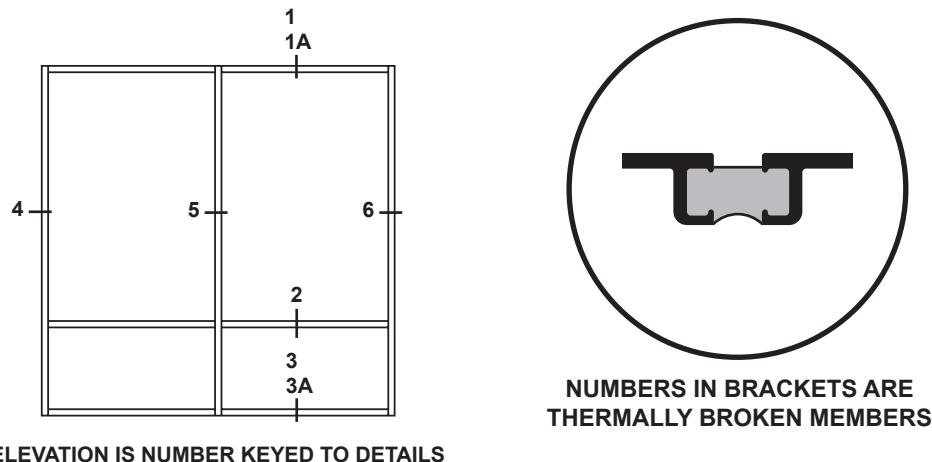

SCREW SPLINE

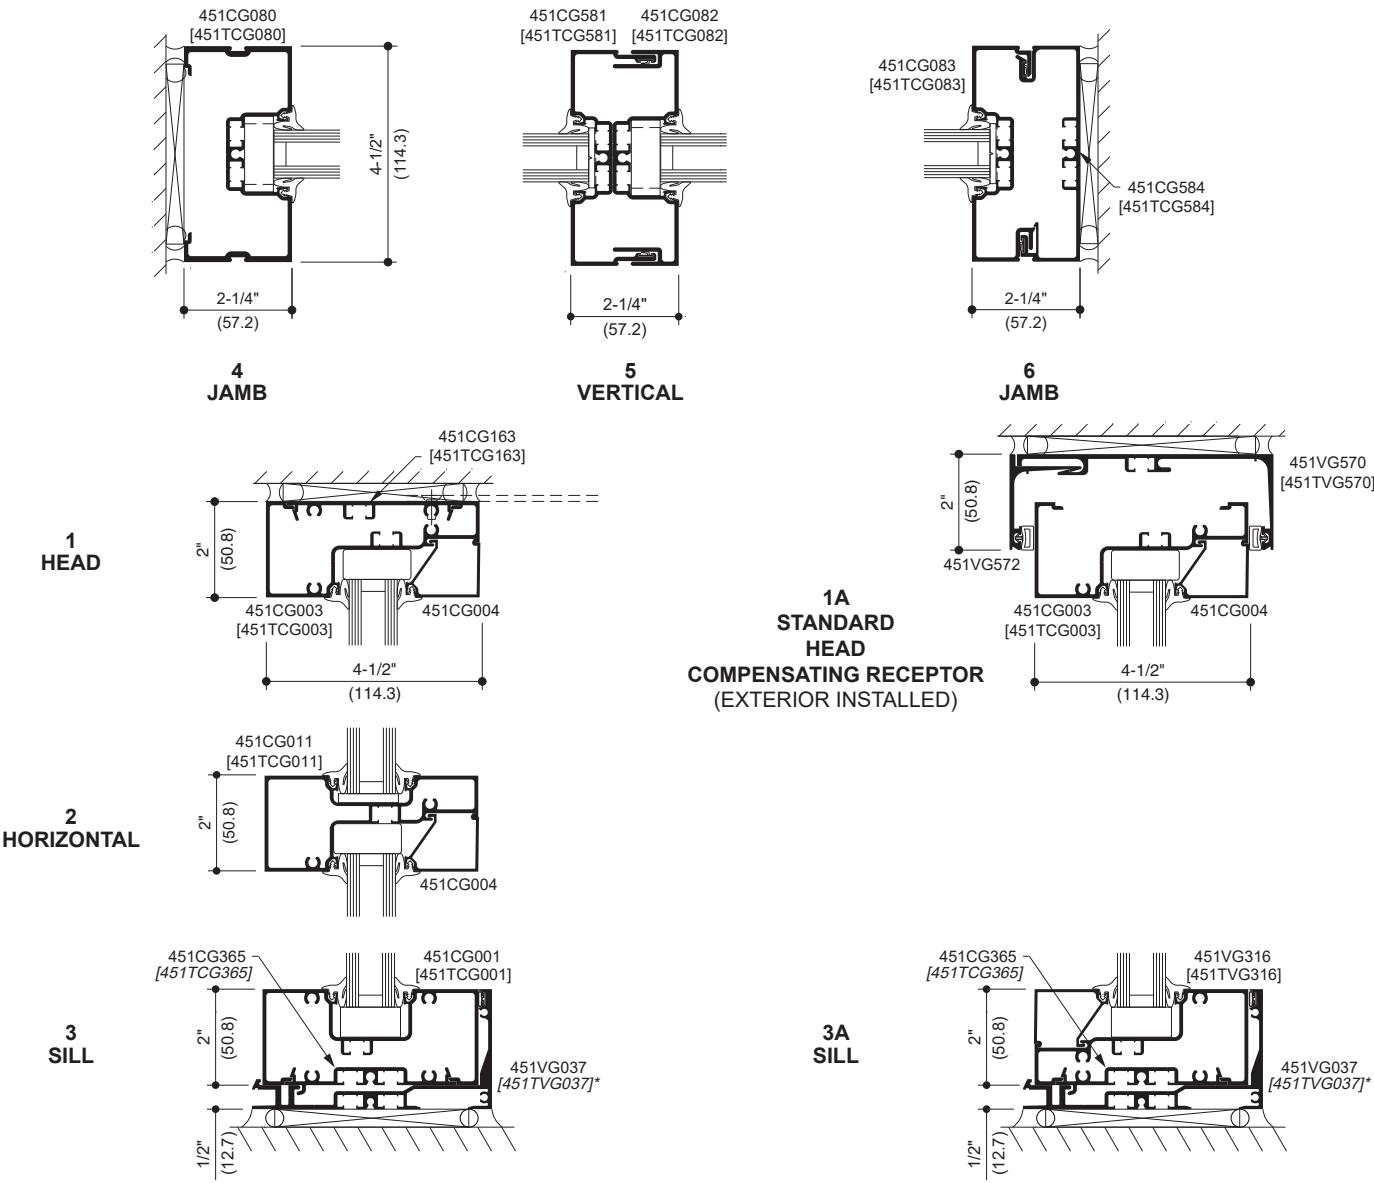

* HP Sill Flashing shown with optional gasket.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.




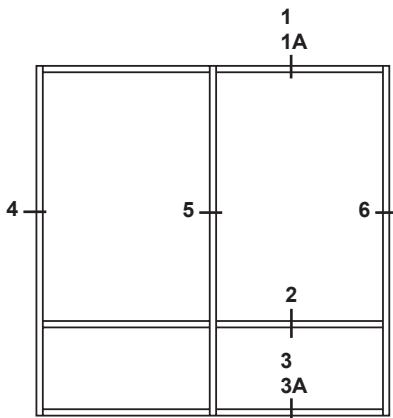


ELEVATION IS NUMBER KEYED TO DETAILS




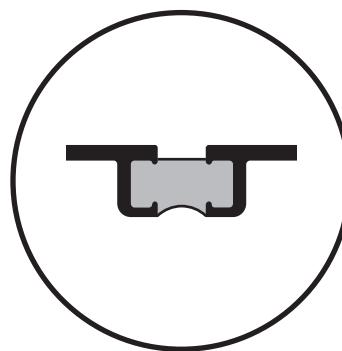


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

SCREW SPLINE

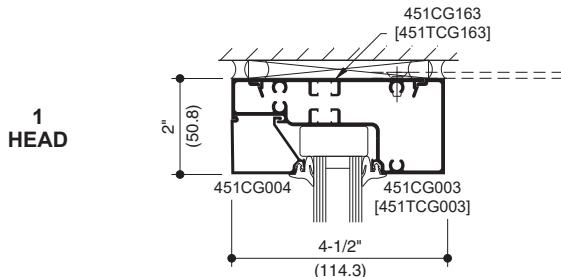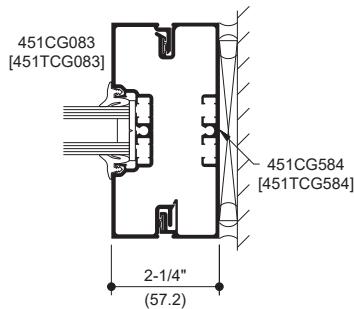
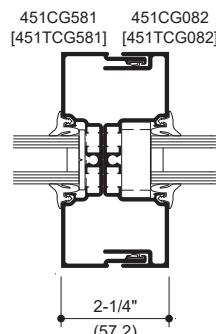
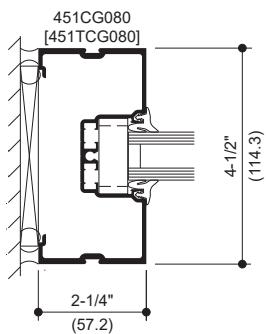


1A
STANDARD
HEAD
COMPENSATING RECEPTOR
(EXTERIOR INSTALLED)

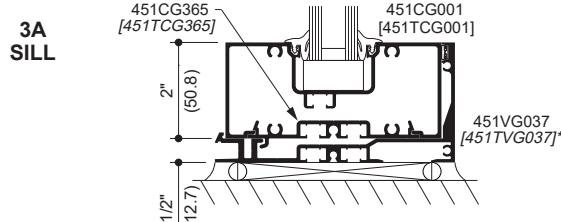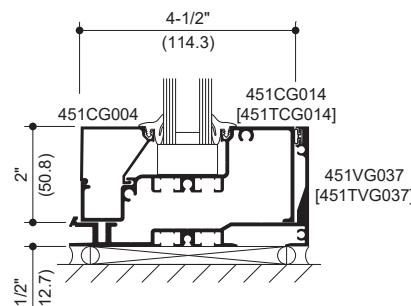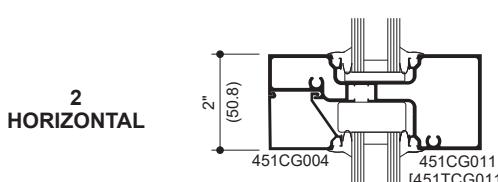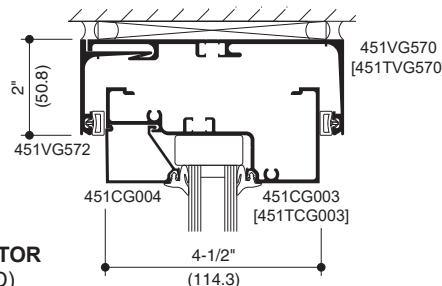


Additional information and CAD details are available at www.kawneer.com

PRE-GLAZED EXPANSION MULLIONS

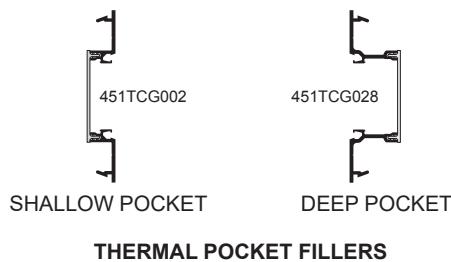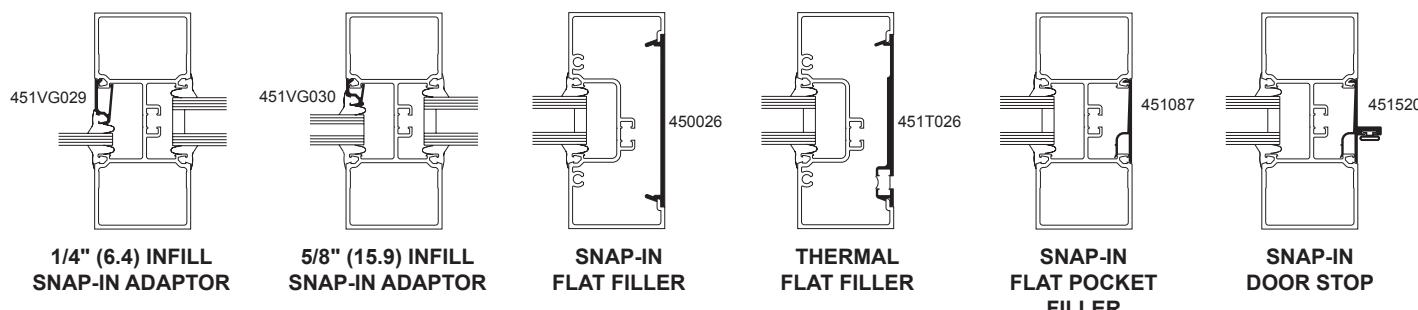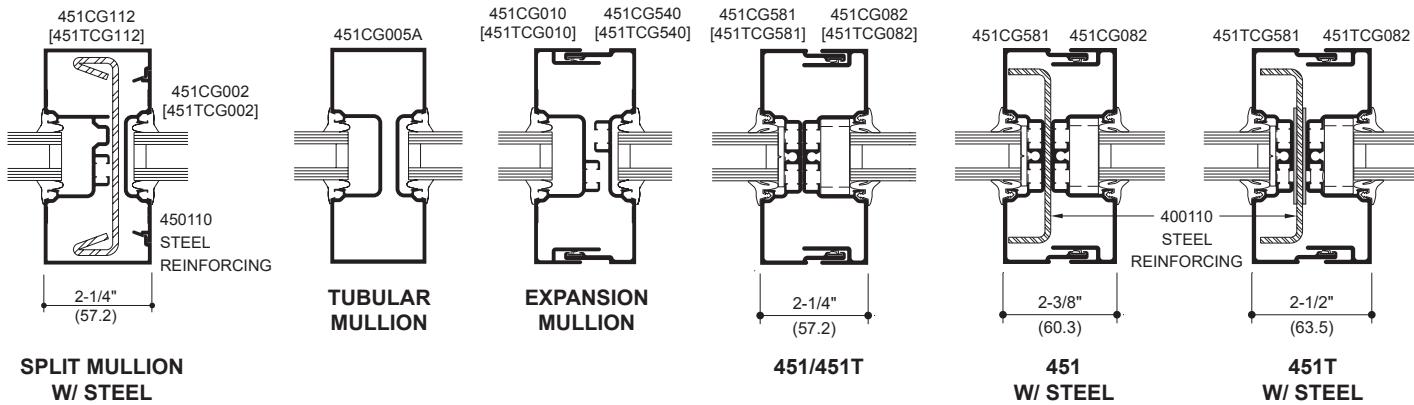

THERMAL POCKET FILLERS




MULLION ANCHOR

NOTE:


If the end reaction of the mullion (mullion spacing (ft.) times height (ft) times specified wind load (psf), divided by two) is more than 500 LBS., the optional mullion anchor must be used. Consult Application Engineering.

NOTE:

Mullion Anchor not used with Lightweight Receptor.



OPTIONAL LIGHTWEIGHT CAN RECEPTORS



OPTIONAL UNEQUAL LEG CAN RECEPTORS


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.












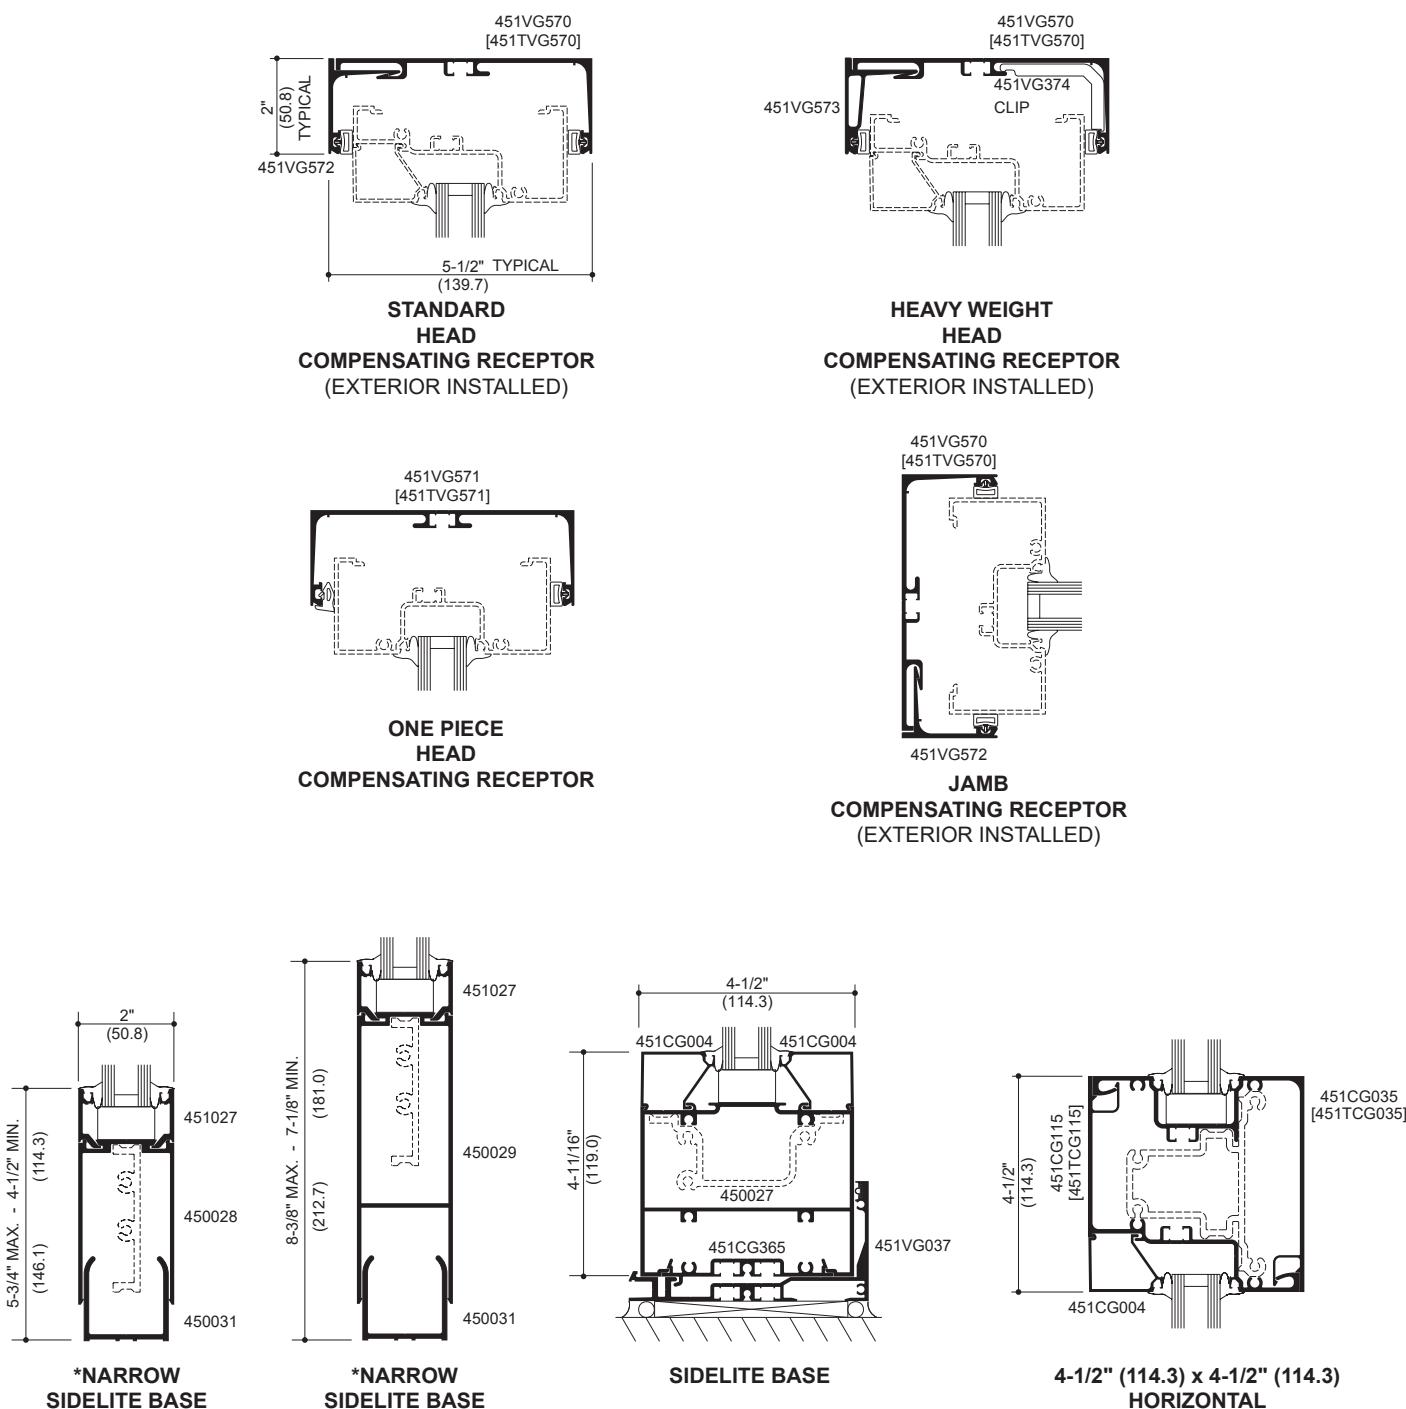


SIDELITE BASES ARE NON-THERMAL APPLICATIONS

*NARROW SIDELITE BASES REQUIRE THE USE OF NON-THERMAL 2-PIECE VERTICALS ONLY.

NOTE: SIDELITE BASES SHOWN ARE FOR USE WITH SCREW SPLINE AND SHEAR BLOCK SYSTEMS ONLY.

Additional information and CAD details are available at www.kawneer.com

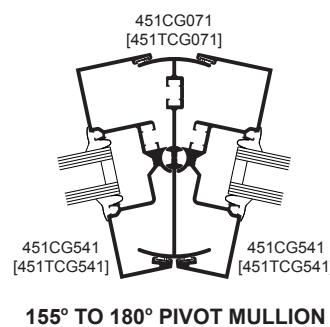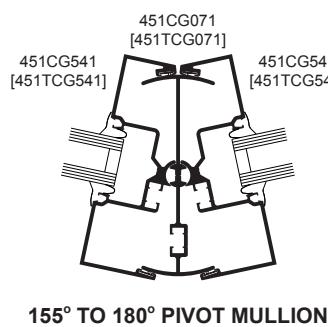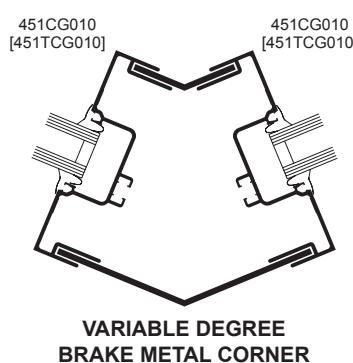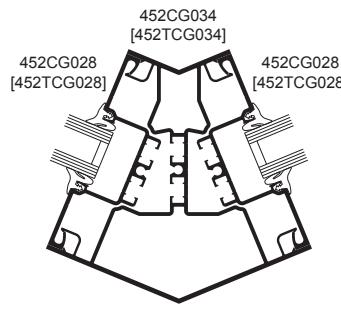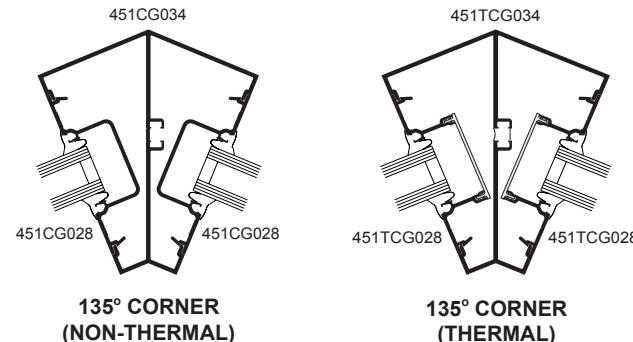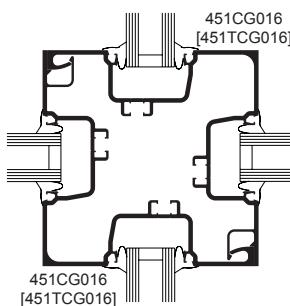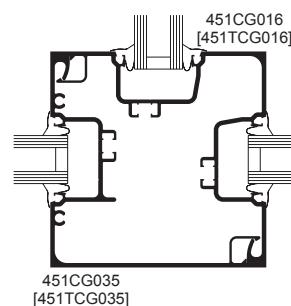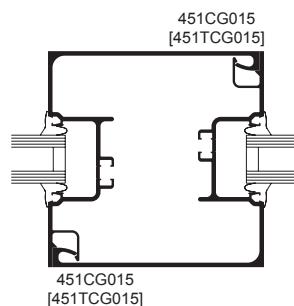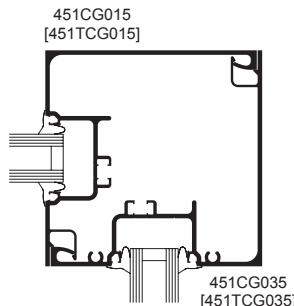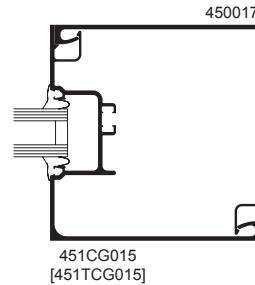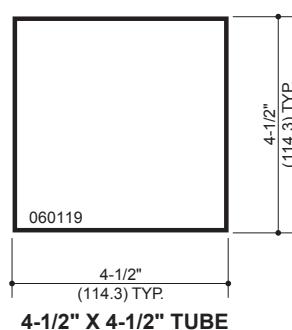


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.






© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

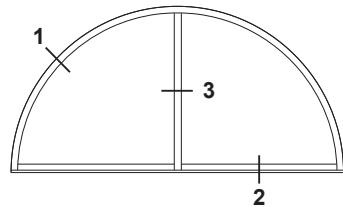

CURVING DETAILS
(Center Plane Only)

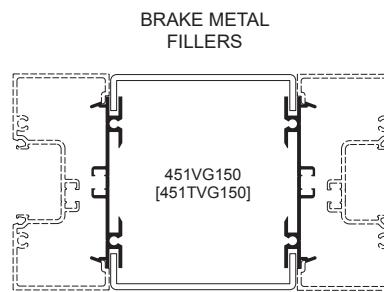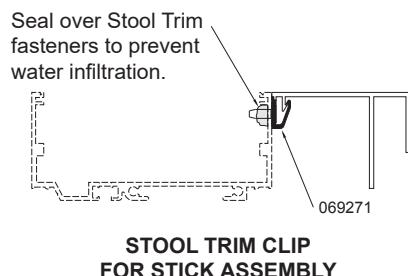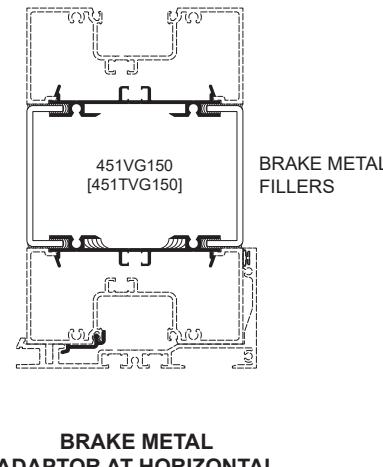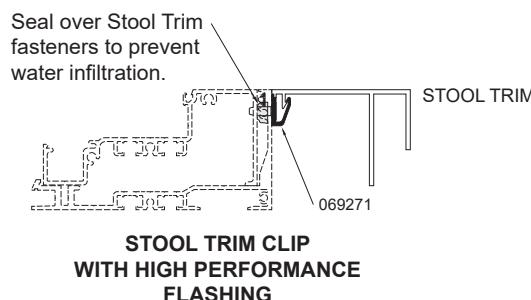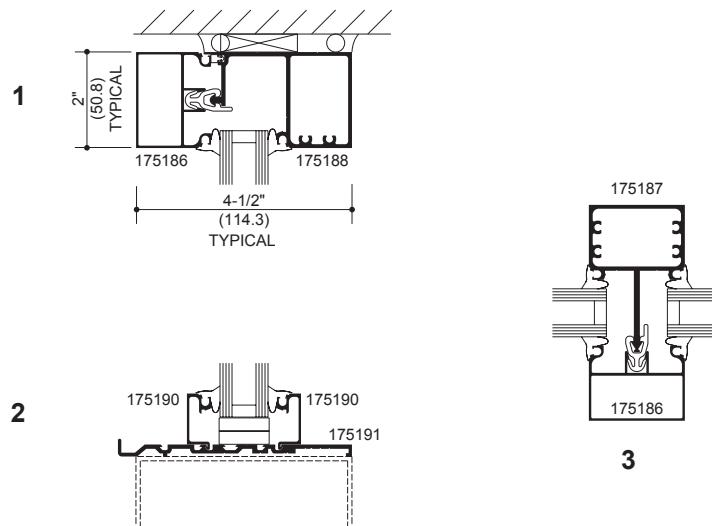


Additional information and CAD details are available at www.kawneer.com


Trifab® VersaGlaze® 451 FRAMING INCORPORATING KAWNEER® "190" DOORS.

DOOR FRAMING NON-THERMAL ONLY

NOTE: OTHER TYPES OF KAWNEER DOORS MAY BE USED WITH THIS FRAMING SYSTEM.
SEE ENTRANCE DETAILS FOR ADDITIONAL INFORMATION.

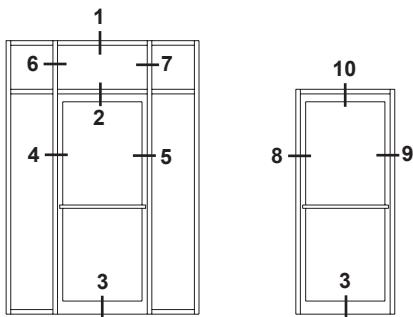


ELEVATIONS ARE NUMBER KEYED TO DETAILS


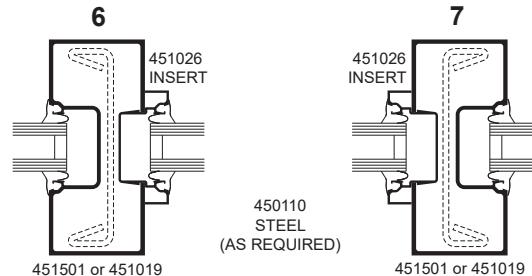


TRANSOM JAMBS


Transom area for both double or single acting doors with glass surround. Jambs above transom bar are routed out to accept glass holding insert with or without steel reinforcing.

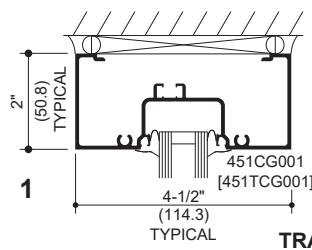

TRANSOM HEAD

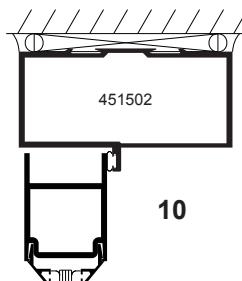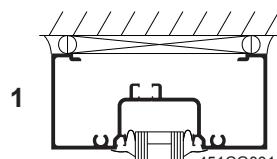


10

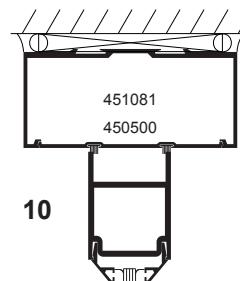



10

SINGLE ACTING HEADER

DOUBLE ACTING HEADER

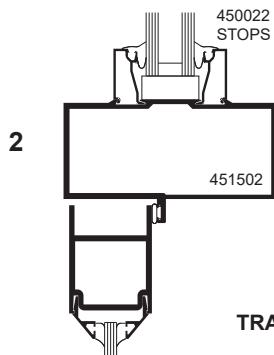


TRANSOM BAR

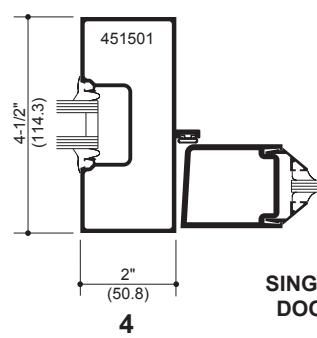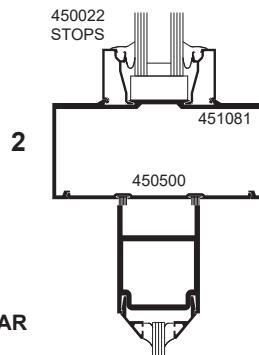

SINGLE ACTING DOOR JAMBS




8

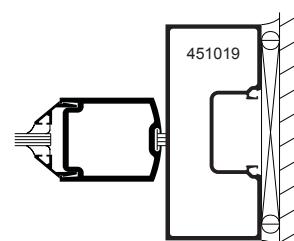


9

DOUBLE ACTING DOOR JAMBS

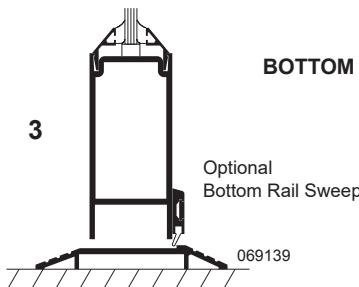

SINGLE ACTING

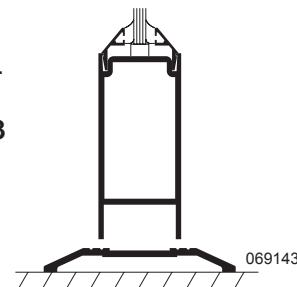


DOUBLE ACTING

Additional information and CAD details are available at www.kawneer.com


Trifab® VersaGlaze® 451 FRAMING INCORPORATING KAWNEER® "190" DOORS.

DOOR FRAMING NON-THERMAL ONLY

NOTE: OTHER TYPES OF KAWNEER DOORS MAY BE USED WITH THIS FRAMING SYSTEM.
SEE ENTRANCE DETAILS FOR ADDITIONAL INFORMATION.

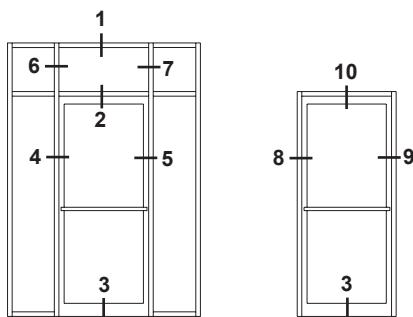


ELEVATIONS ARE NUMBER KEYED TO DETAILS

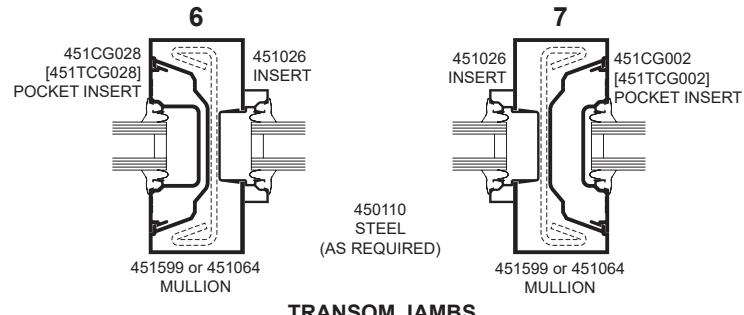


TRANSOM JAMBS


Transom area for both double or single acting doors with glass surround. Jambs above transom bar are routed out to accept glass holding insert with or without steel reinforcing.

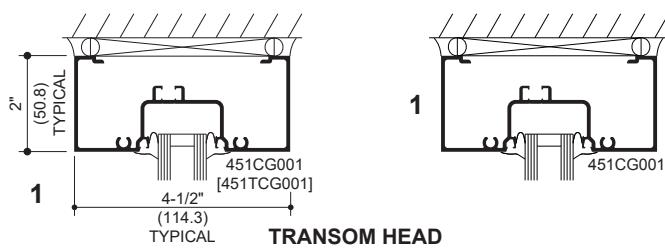


TRANSOM HEAD

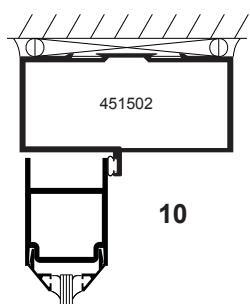


10

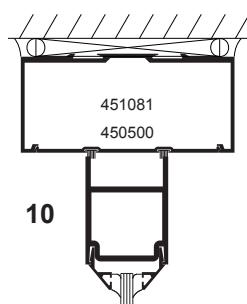


10

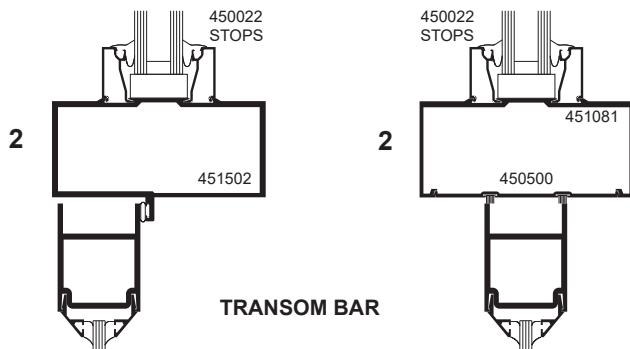

TRANSOM BAR

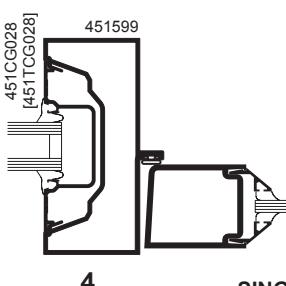

SINGLE ACTING DOOR JAMBS

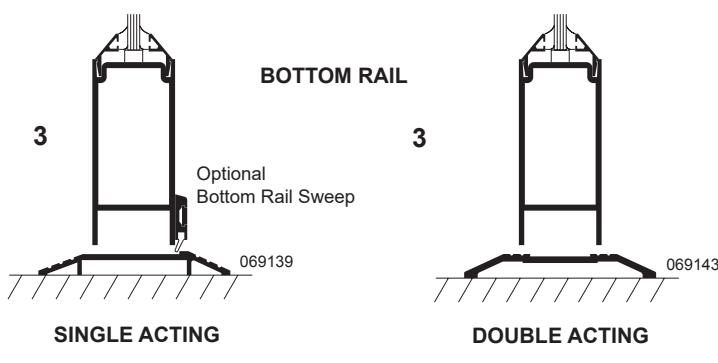


BOTTOM RAIL

3

3

SINGLE ACTING

DOUBLE ACTING

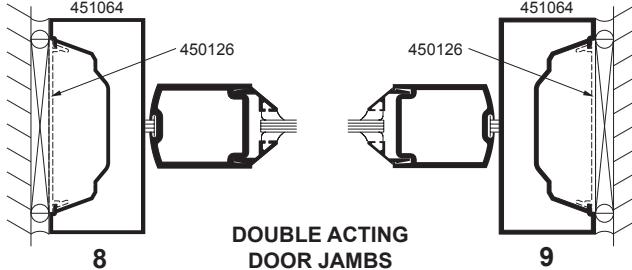

DOUBLE ACTING DOOR JAMBS






8

9


Additional information and CAD details are available at www.kawneer.com

NOTE:


1. SERIES 250T NARROW STILE DOORS ARE DETAILED, MEDIUM STILE 350T DOORS AND WIDE STILE 500T DOORS ALSO MAY BE USED.
2. TRIFAB® VERSAGLAZE® 451T CENTER, 2" x 4-1/2" (50.8 x 114.3) FRAMING IS DETAILED WITH THE DOORS FOR REFERENCE. OTHER KAWNEER FRAMING SERIES OR CURTAIN WALL SYSTEMS MAY BE USED.

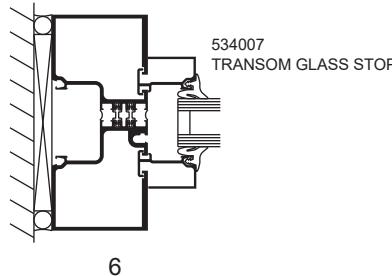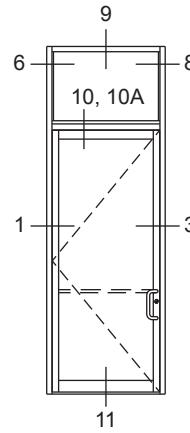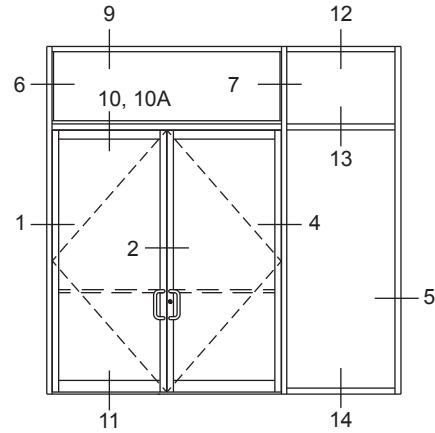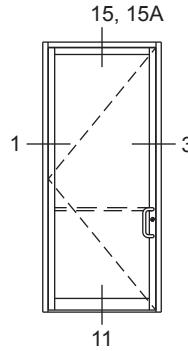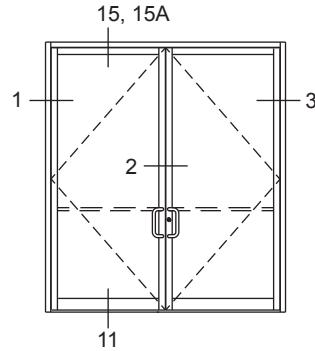


6




7




8

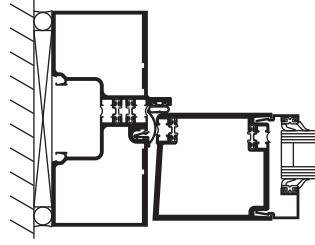

1

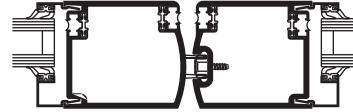


2

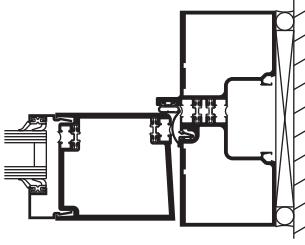


3

SINGLE ACTING DOORS

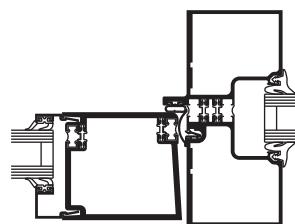

4



5

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

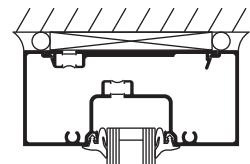


9


SINGLE ACTING DOORS

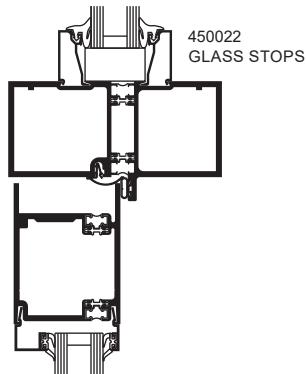

10

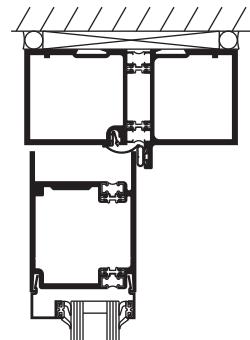


15

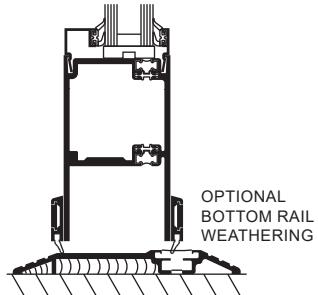


11

SURFACE OVERHEAD CLOSER




12


COC WITH SINGLE ACTING OFFSET ARM

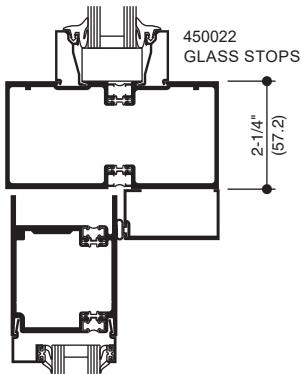

10A

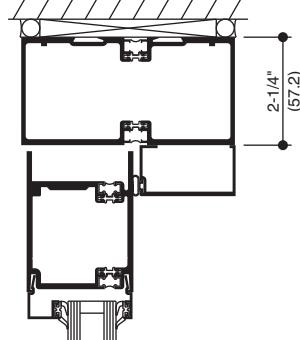


15A

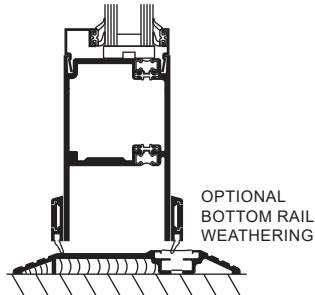


11

CONSEALLED OVERHEAD CLOSER

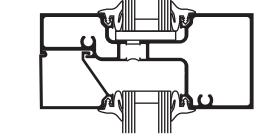



13

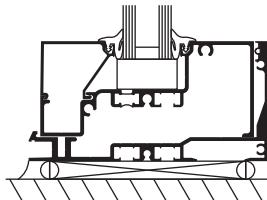

14


Additional information and CAD details are available at www.kawneer.com

OUTSWING CASEMENT VERTICAL SECTION

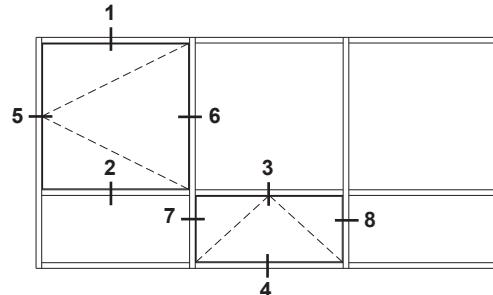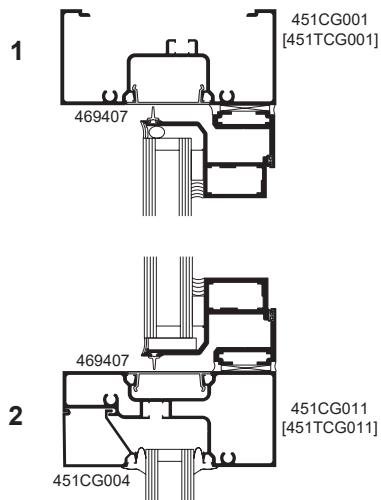


ELEVATION IS NUMBER KEYED TO DETAILS


PROJECT-OUT VERTICAL SECTION

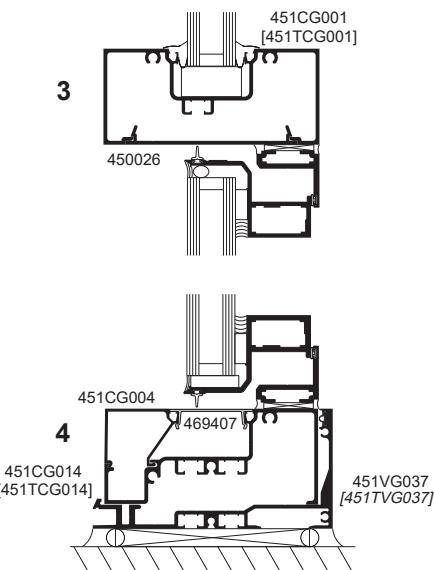

OUTSWING CASEMENT HORIZONTAL SECTION

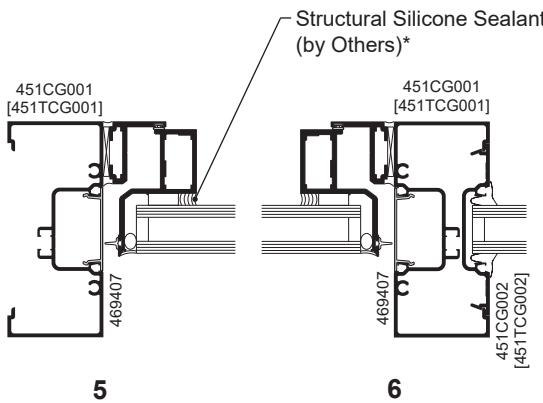

PROJECT-OUT HORIZONTAL SECTION

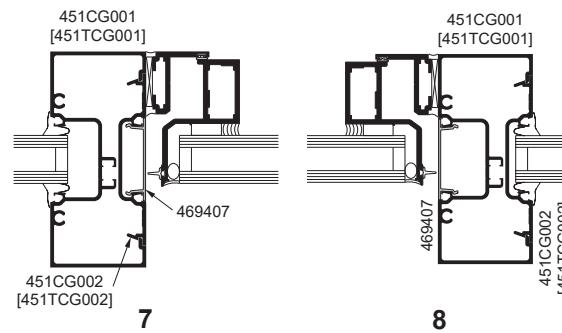

NOTE: Black spacer is recommended when 1" (25.4) insulating glass is used.

* **INSTALLER NOTE:** Installer is responsible for all required compatibility review and approvals with the Structural Silicone Manufacturer and the Insulating Glass Unit Manufacturer.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.


Additional information and CAD details are available at www.kawneer.com

**PROJECT-OUT
VERTICAL SECTION**


1

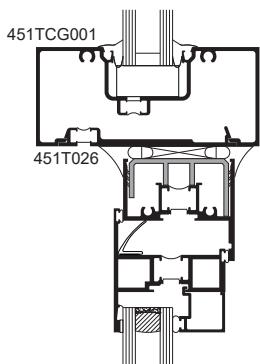

2

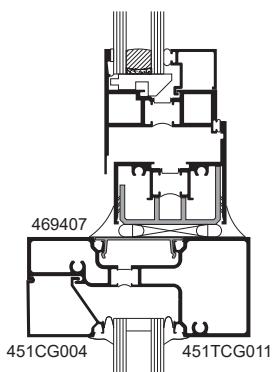


8225TL THERMAL WINDOWS SHOWN
NOTE: OTHER VENT TYPES CAN BE
ACCOMMODATED, CONSULT YOUR KAWNEER
REPRESENTATIVE FOR OTHER OPTIONS

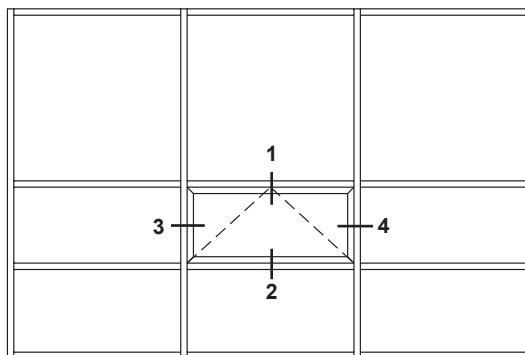


ELEVATION IS NUMBER KEYED TO DETAILS

**PROJECT-OUT
HORIZONTAL SECTION**

3

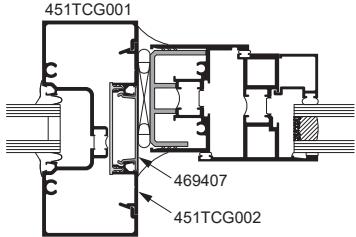

4

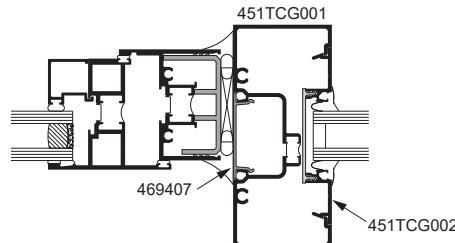


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.



Additional information and CAD details are available at www.kawneer.com

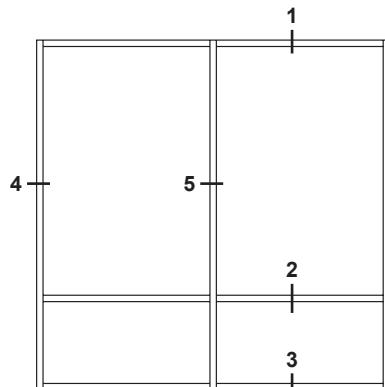


ELEVATION IS NUMBER KEYED TO DETAILS

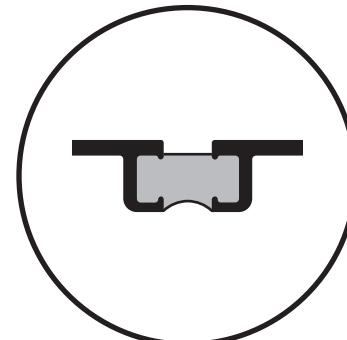


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS


SCREW SPLINE

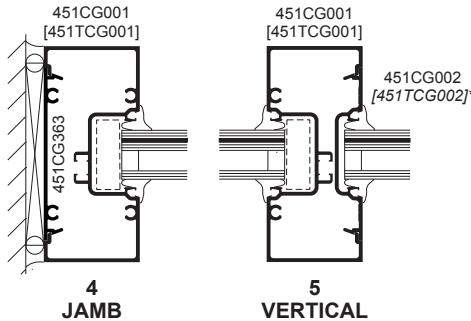


4 JAMB 5 VERTICAL

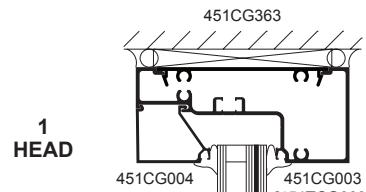

1 HEAD

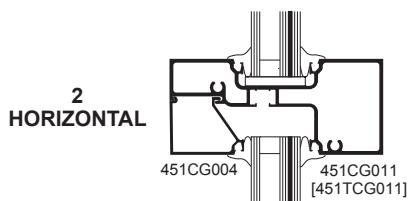


2 HORIZONTAL

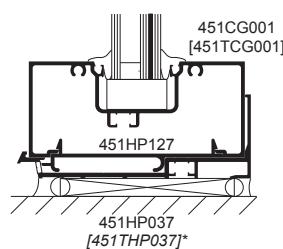


3 SILL


OPTIONAL FRAMING (CENTER)

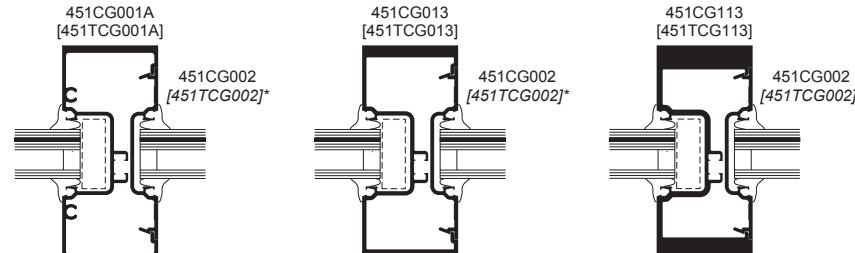


5 VERTICAL 5 VERTICAL

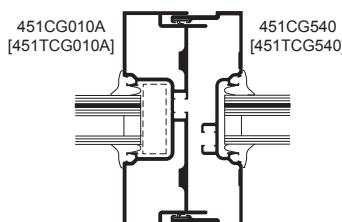


TUBULAR EXPANSION MULLION

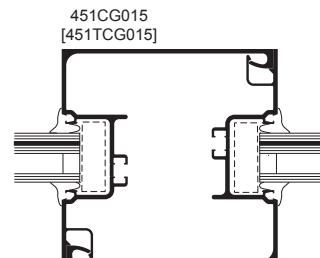

TWO POCKET CORNER POST

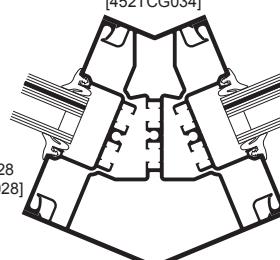

135° CORNER

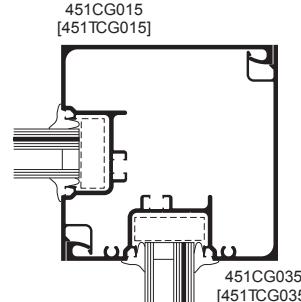

TWO POCKET OUTSIDE CORNER POST

TWO POCKET INSIDE CORNER POST

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.





ENTRANCE FRAMING (CENTER)

LEVEL D - LARGE MISSILE IMPACT


Hurricane Resistant Product

Additional information and CAD details are available at www.kawneer.com**Trifab® VersaGlaze® 451 FRAMING INCORPORATING KAWNEER® "350/500 IR" DOORS (DRY GLAZED).****DOOR FRAMING NON-THERMAL ONLY**


NOTE: OTHER TYPES OF KAWNEER DOORS MAY BE USED WITH THIS FRAMING SYSTEM.
SEE ENTRANCE DETAILS FOR ADDITIONAL INFORMATION.

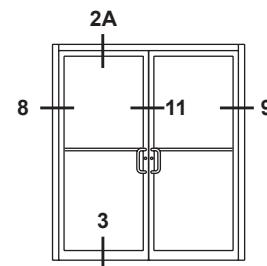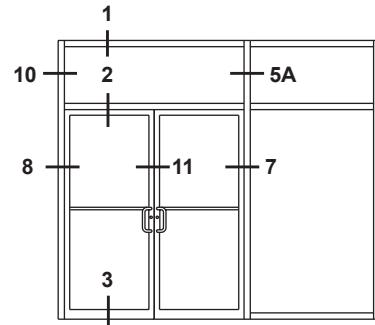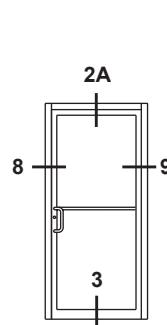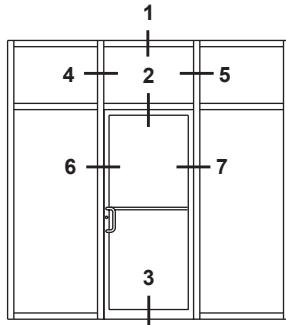


ELEVATIONS ARE NUMBER KEYED TO DETAILS

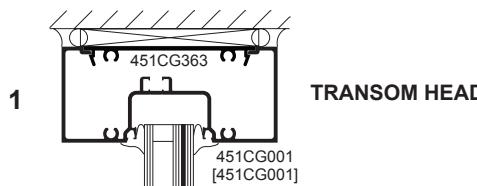


TRANSOM HEAD

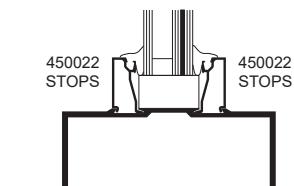

TRANSOM BAR


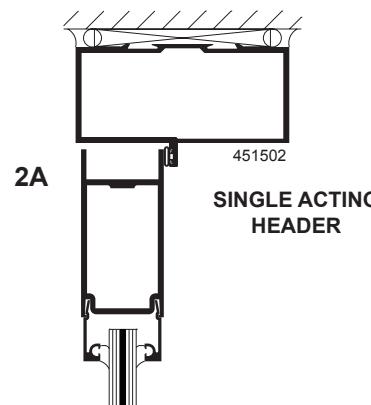


SINGLE ACTING HEADER

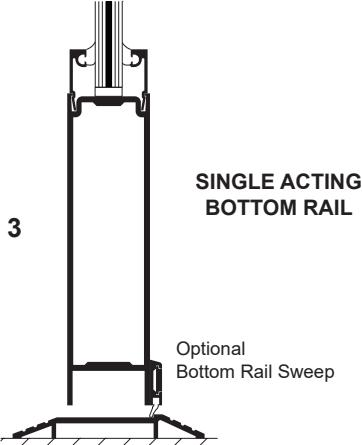

SINGLE ACTING BOTTOM RAIL

Optional Bottom Rail Sweep

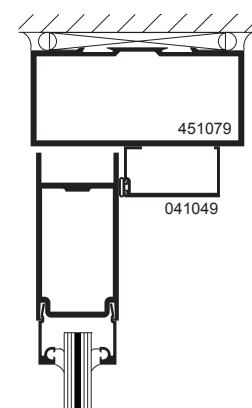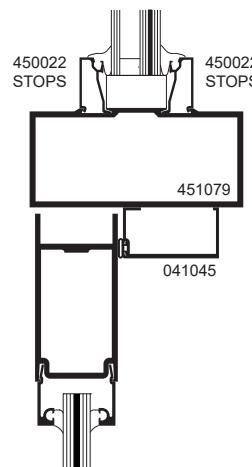**CONCEALED
OVERHEAD CLOSERS**




Additional information and CAD details are available at www.kawneer.com

Trifab® VersaGlaze® 451 FRAMING INCORPORATING KAWNEER® "350/500 IR" DOORS (DRY GLAZED).



DOOR FRAMING NON-THERMAL ONLY

**NOTE: OTHER TYPES OF KAWNEER DOORS MAY BE USED WITH THIS FRAMING SYSTEM.
SEE ENTRANCE DETAILS FOR ADDITIONAL INFORMATION.**




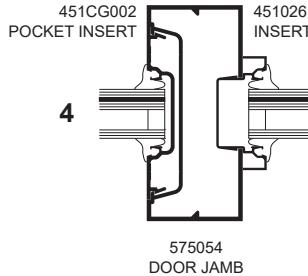


TRANSOM JAMBS


Transom area for both double or single acting doors with glass surround. Jambs above transom bar are routed out to accept glass holding insert with or without steel reinforcing.

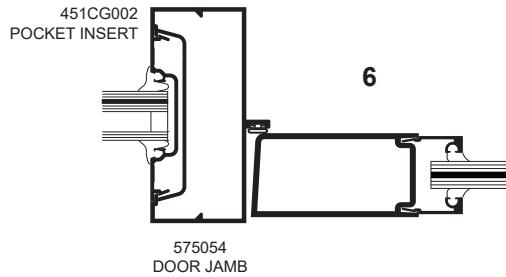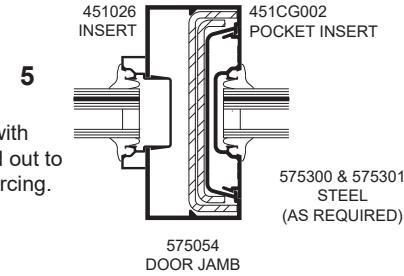

SINGLE ACTING DOOR JAMBS

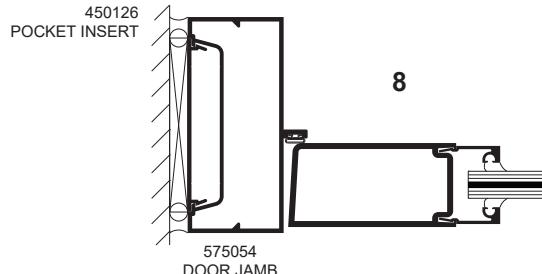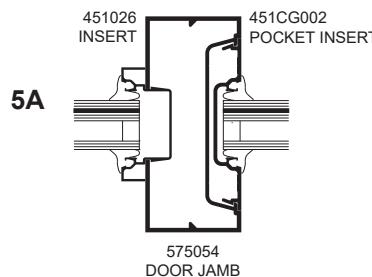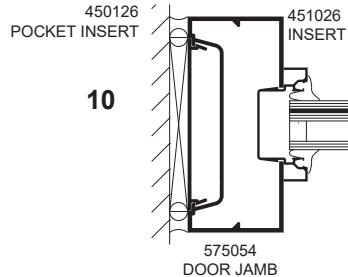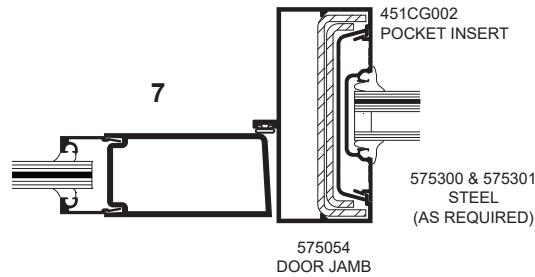

SINGLE ACTING DOOR JAMBS

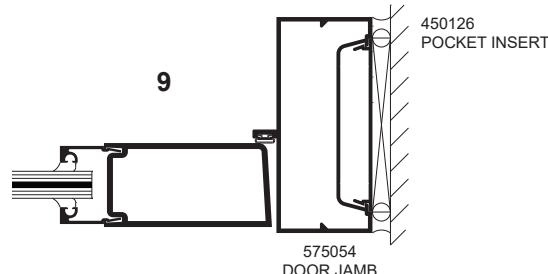

**11
MEETING STILES**

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.


BASIC FRAMING DETAILS

(FRONT - Inside Glazed - Stops Down)	32
(FRONT - Outside Glazed - Stops Down)	33
STICK	34-36
PUNCHED OPENING	37-38
MISCELLANEOUS FRAMING	39-40
CORNERS	41-42
ENTRANCE FRAMING	43
GLASSvent® WINDOW for STOREFRONT FRAMING	44
8225TL THERMAL WINDOW DETAILS	45

Additional information and CAD details are available at www.kawneer.com



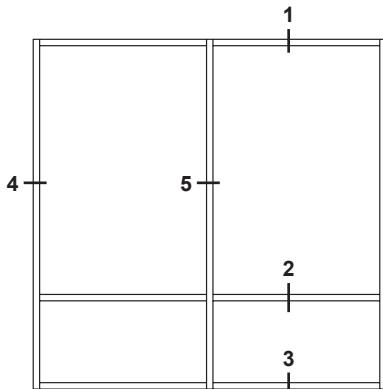


ELEVATION IS NUMBER KEYED TO DETAILS



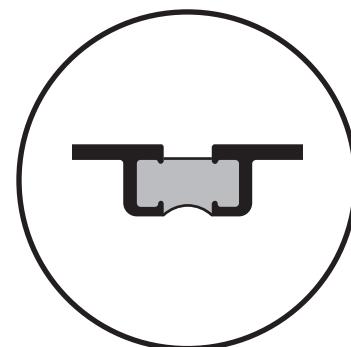


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS





SCREW SPLINE

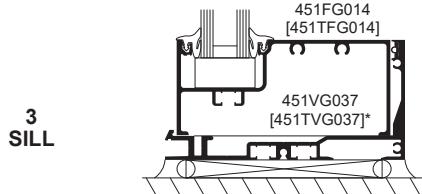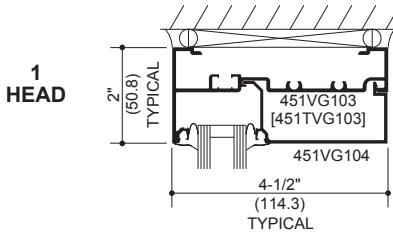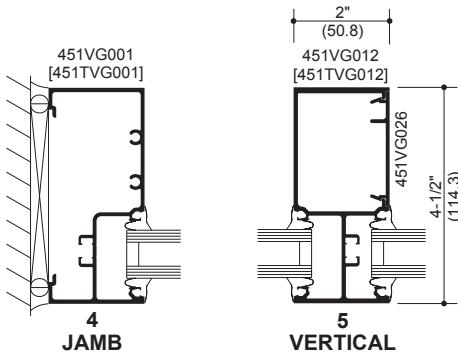

SHEAR BLOCK

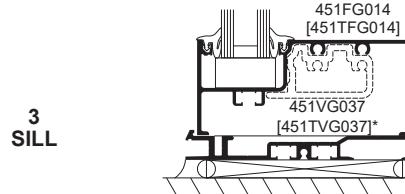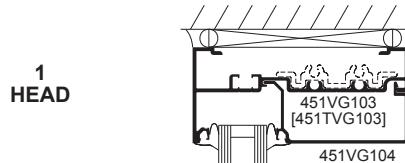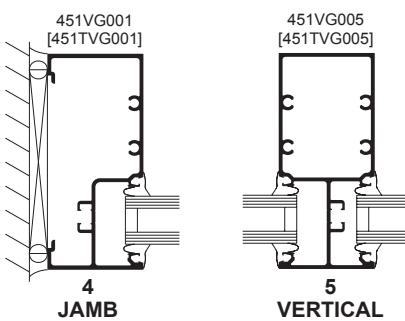

STICK

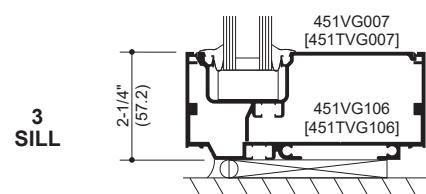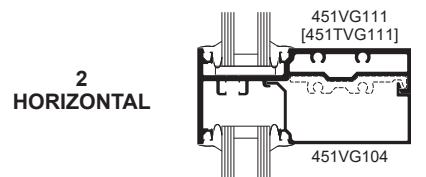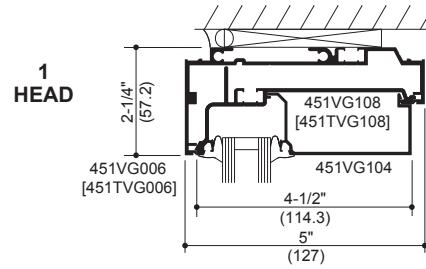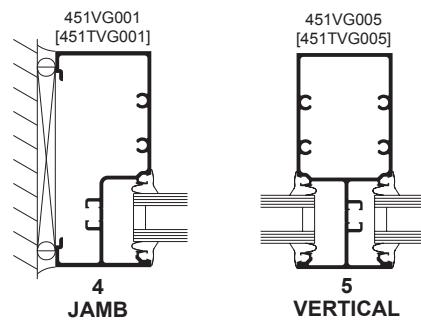

* HP Sill Flashing shown with optional gasket.

* HP Sill Flashing shown with optional gasket.



Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.





Additional information and CAD details are available at www.kawneer.com

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

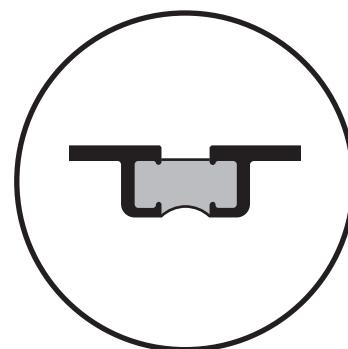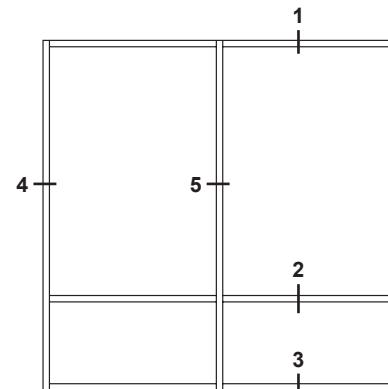





NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

SCREW SPLINE

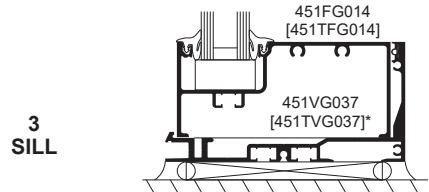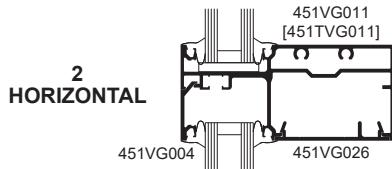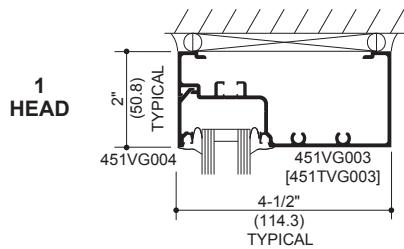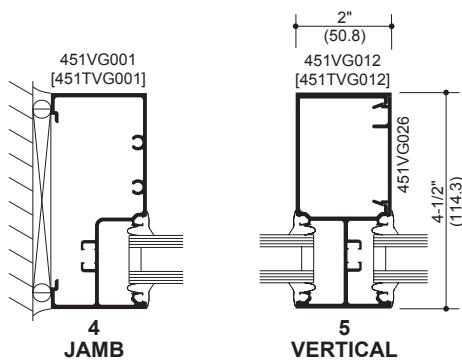





* HP Sill Flashing shown with optional gasket.

SHEAR BLOCK

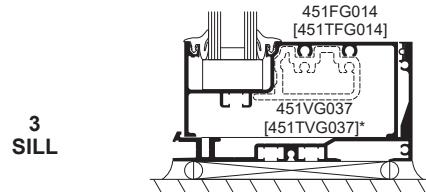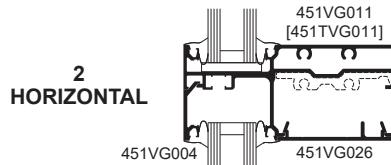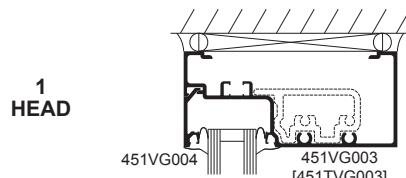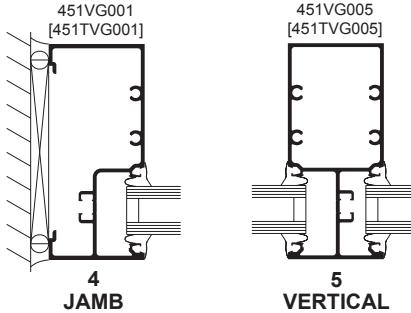


* HP Sill Flashing shown with optional gasket.

STICK

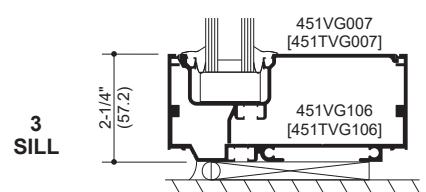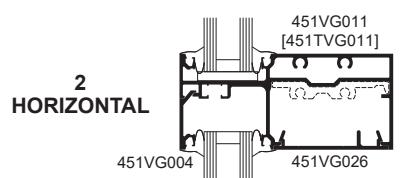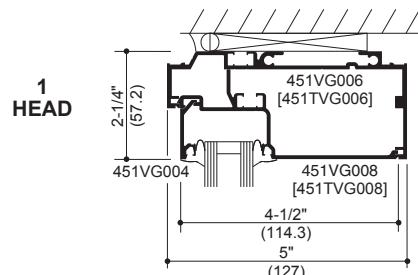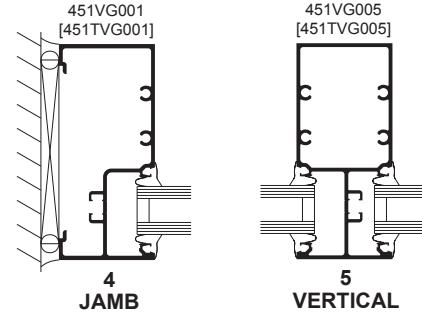


Additional information and CAD details are available at www.kawneer.com

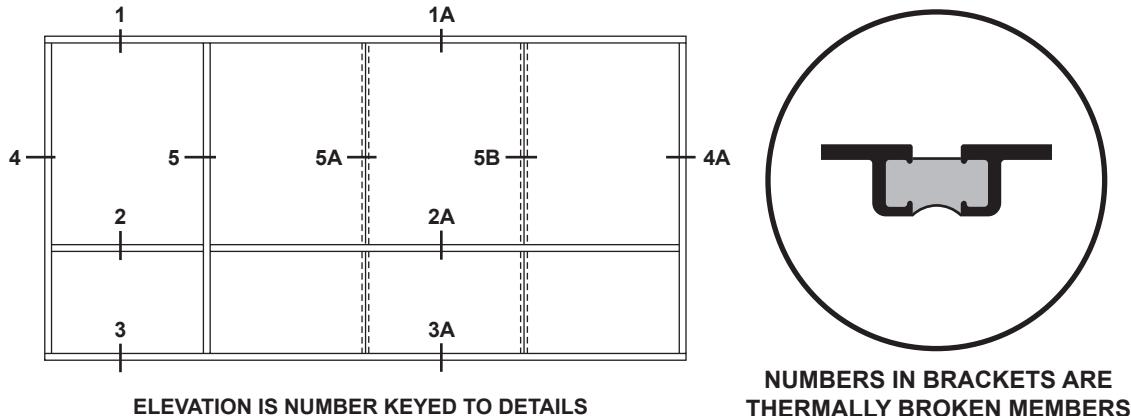

STICK (INSIDE GLAZED) TWO COLOR OPTION

STANDARD RECEPTOR with SSG ADAPTOR

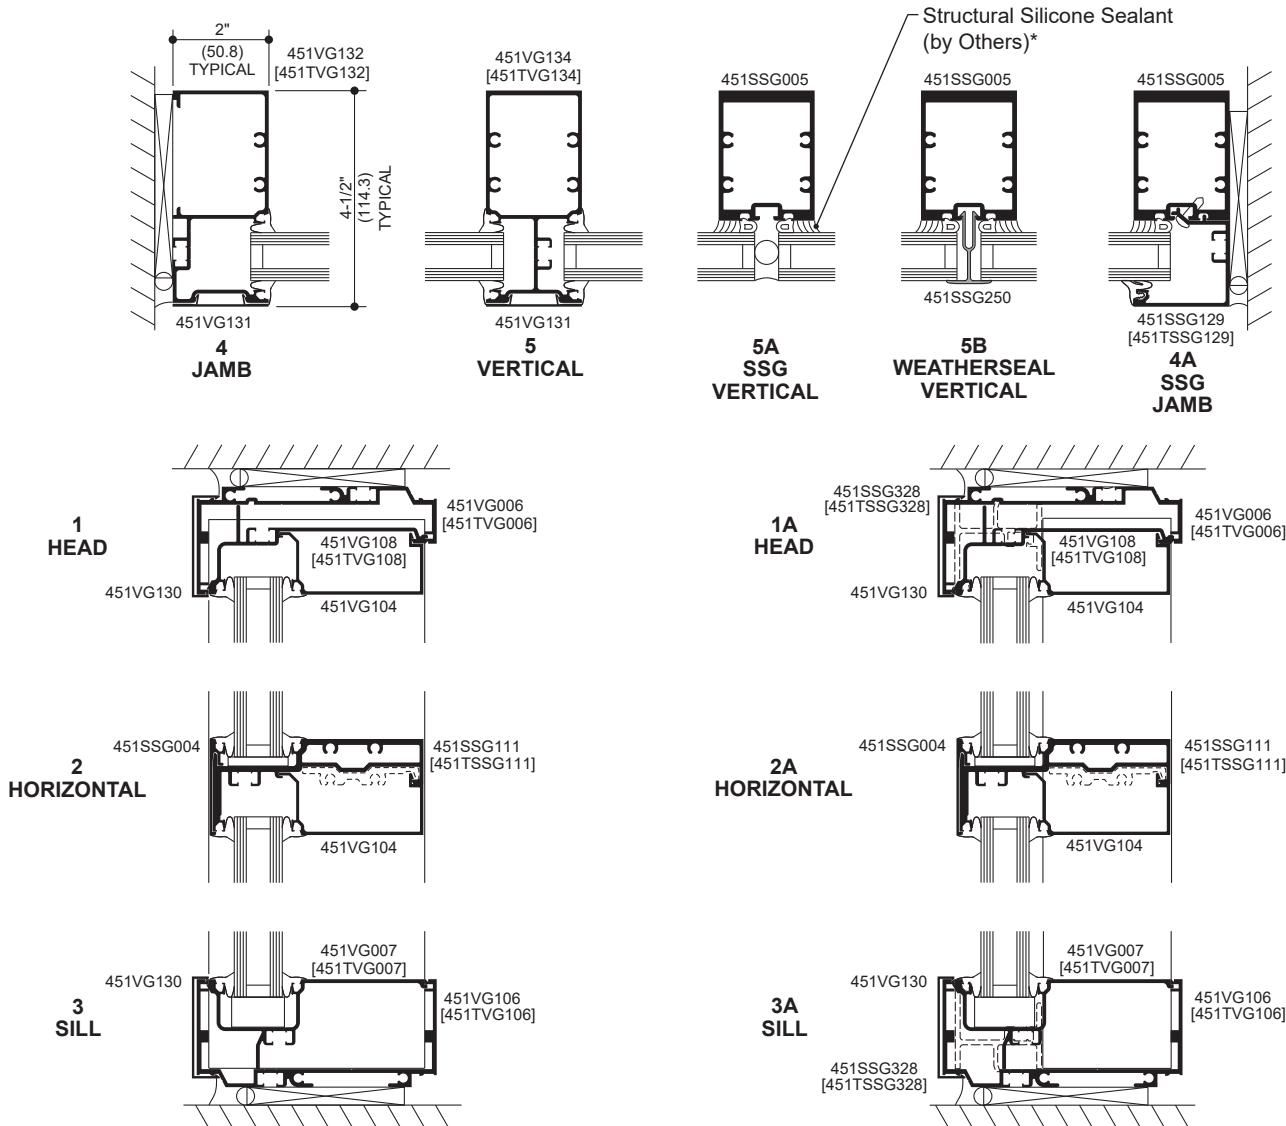

* INSTALLER NOTE: Installer is responsible for all required compatibility review and approvals with the Structural Silicone Manufacturer and the Insulating Glass Unit Manufacturer.


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

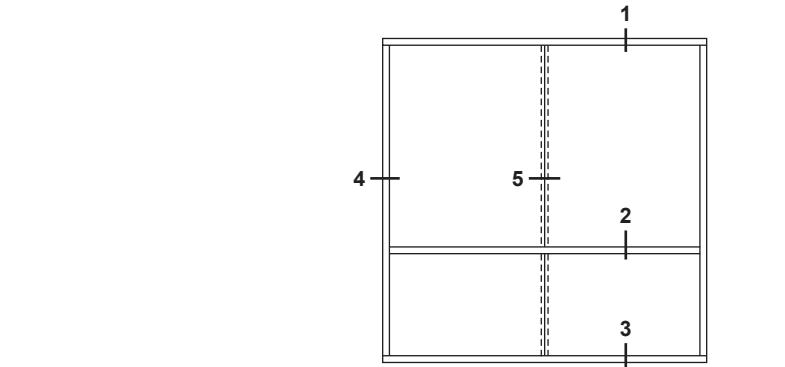


ELEVATION IS NUMBER KEYED TO DETAILS

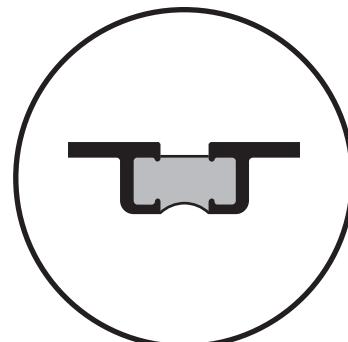


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

STICK (INSIDE GLAZED) SSG RECEPTOR

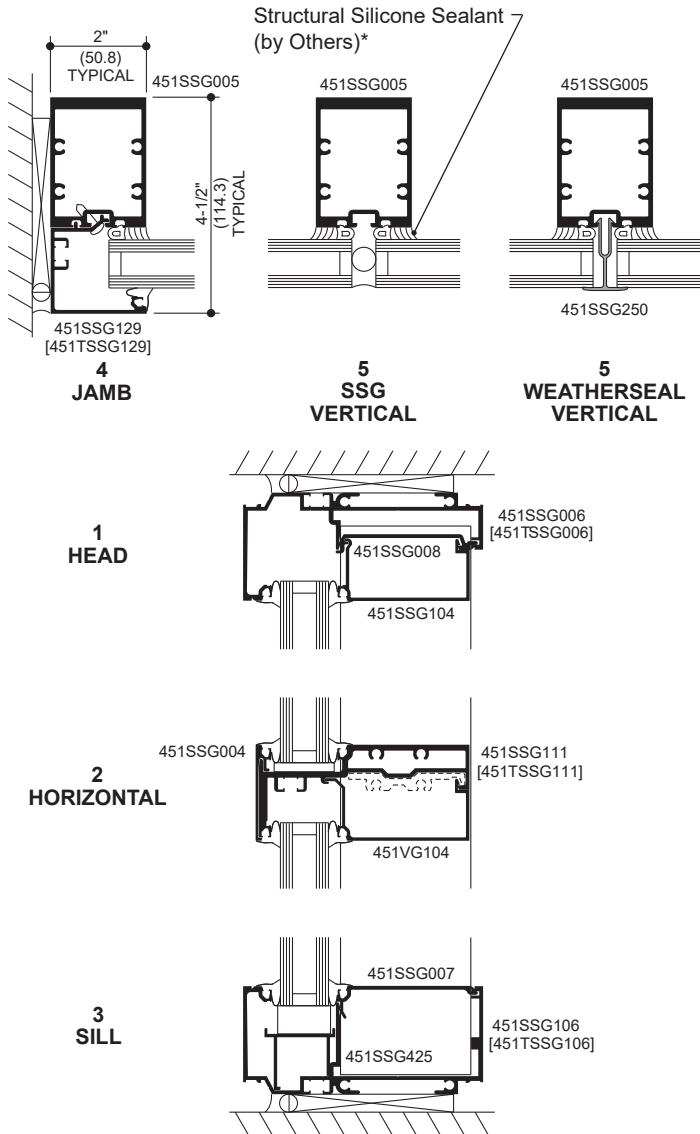


STICK (OUTSIDE GLAZED) SSG RECEPTOR

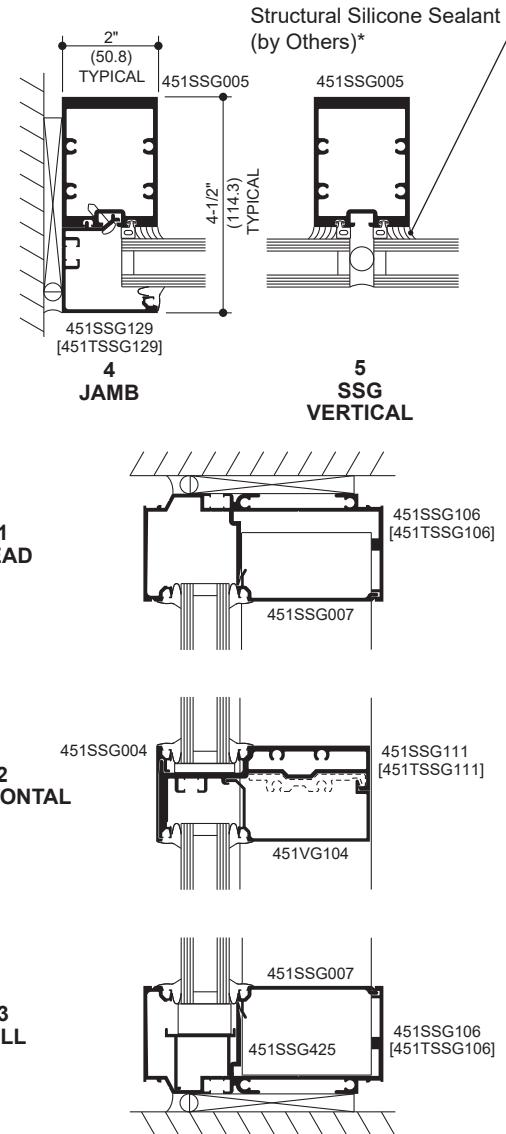


* INSTALLER NOTE: Installer is responsible for all required compatibility review and approvals with the Structural Silicone Manufacturer and the Insulating Glass Unit Manufacturer.

Additional information and CAD details are available at www.kawneer.com

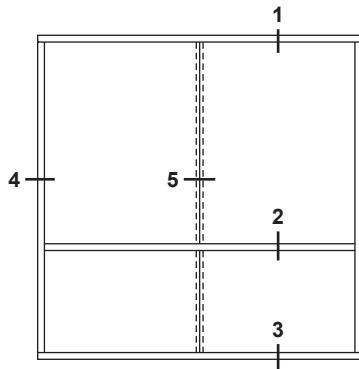





ELEVATION IS NUMBER KEYED TO DETAILS

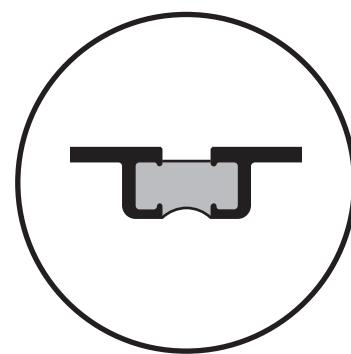

NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

STICK (INSIDE GLAZED) TWO COLOR OPTION

SSG RECEPTOR

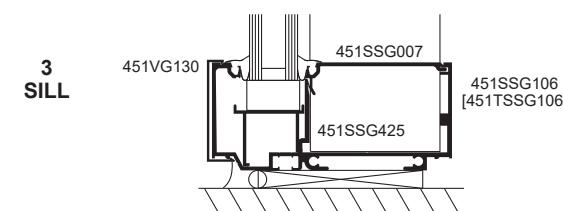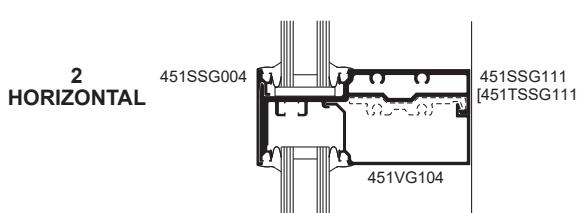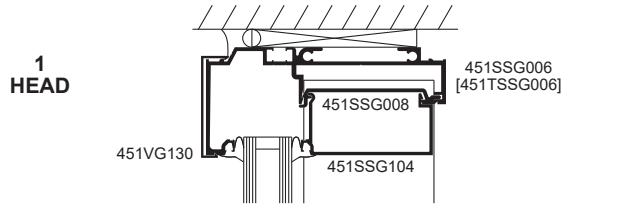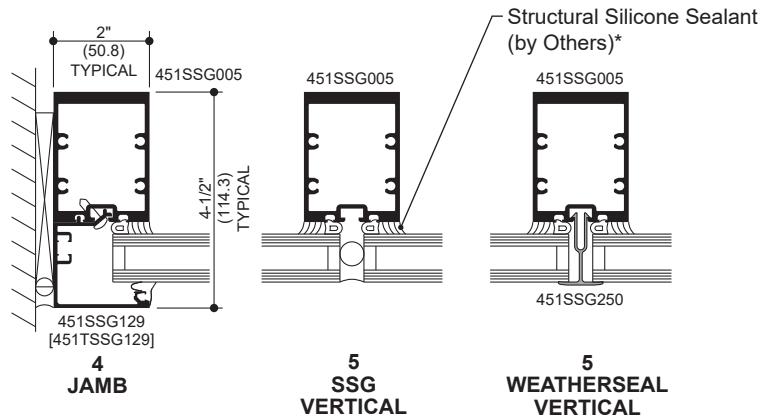

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.


* INSTALLER NOTE: Installer is responsible for all required compatibility review and approvals with the Structural Silicone Manufacturer and the Insulating Glass Unit Manufacturer.

Additional information and CAD details are available at www.kawneer.com

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

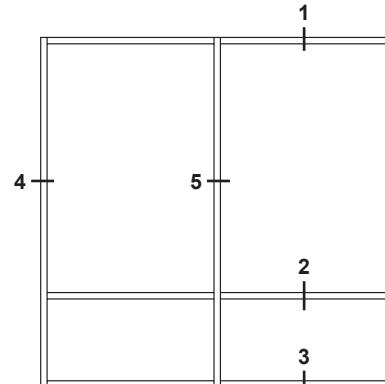


ELEVATION IS NUMBER KEYED TO DETAILS

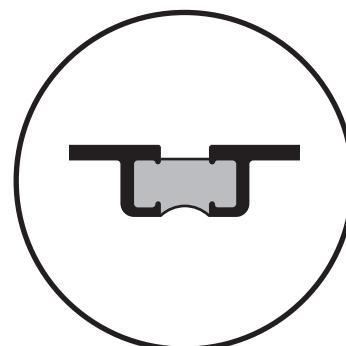


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

CONTINUOUS HEAD AND SILL (INSIDE GLAZED)


PUNCHED OPENING

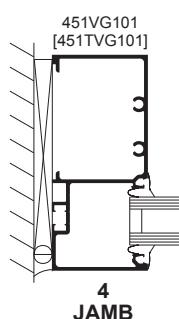


4 JAMB

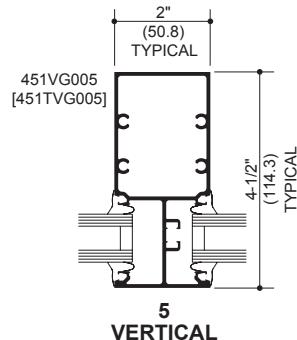


5 VERTICAL

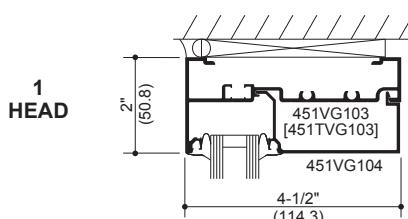


1 HEAD

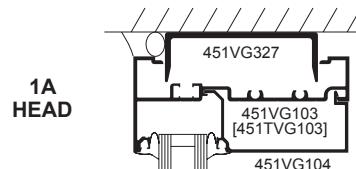

1A HEAD

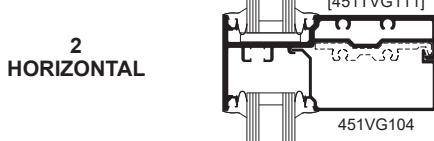


2 HORIZONTAL




3 SILL

Additional information and CAD details are available at www.kawneer.com

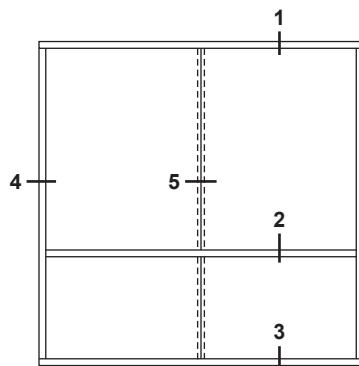


ELEVATION IS NUMBER KEYED TO DETAILS

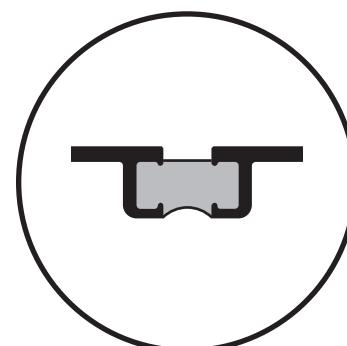

NUMBERS IN BRACKETS ARE
THERMALLY BROKEN MEMBERS

CONTINUOUS HEAD AND SILL (INSIDE GLAZED) SSG \ WEATHERSEAL

PUNCHED OPENING

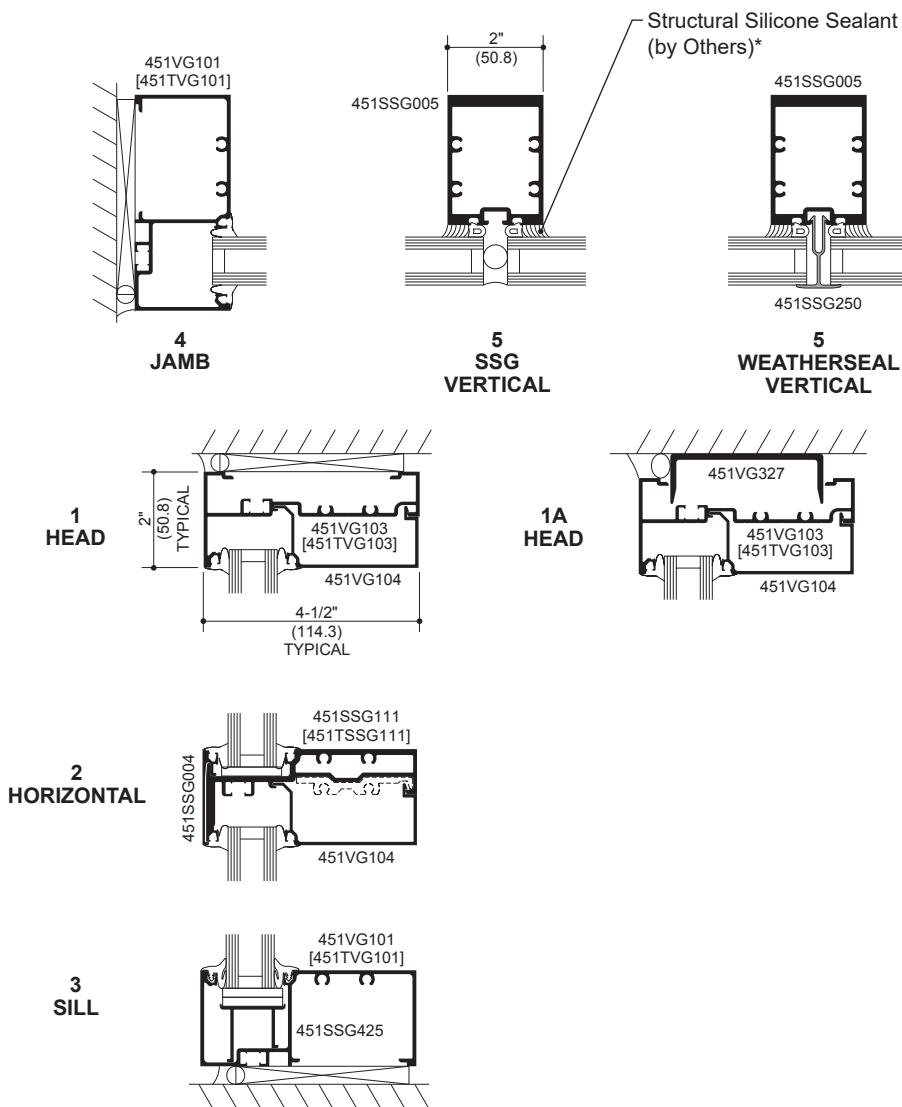

* INSTALLER NOTE: Installer is responsible for all required compatibility review and approvals with the Structural Silicone Manufacturer and the Insulating Glass Unit Manufacturer.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com




EXPANSION MULLION




TUBULAR EXPANSION MULLION




TUBULAR EXPANSION MULLION WITH STEEL




1/4" (6.4) INFILL SNAP-IN ADAPTOR




5/8" (15.9) INFILL SNAP-IN ADAPTOR




PVC FLAT FILLER (NON STRUCTURAL)




THERMAL FLAT FILLER




SNAP-IN FLAT FILLER

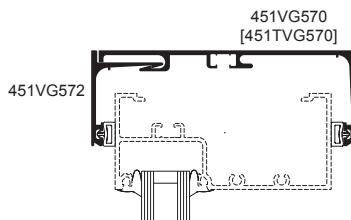


STANDARD - HEAD COMPENSATING RECEPTOR (EXTERIOR INSTALLED)

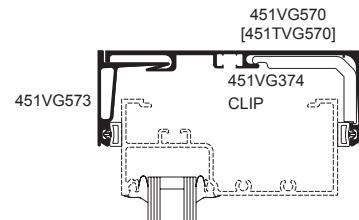

HEAVY WEIGHT - HEAD COMPENSATING RECEPTOR

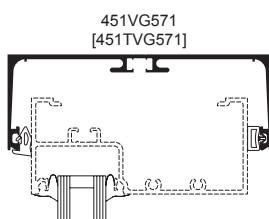


ONE PIECE - HEAD COMPENSATING RECEPTOR

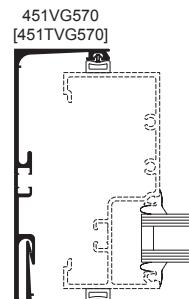


JAMB COMPENSATING RECEPTOR (EXTERIOR INSTALLED)


Additional information and CAD details are available at www.kawneer.com

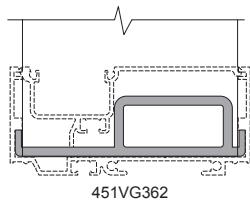


MULLION ANCHOR




450VG006




451VG006

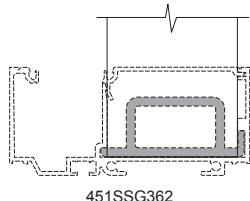

SSG MULLION ANCHOR



450VG106



451VG106

OPTIONAL LIGHTWEIGHT CAN RECEPTORS


OPTIONAL UNEQUAL LEG CAN RECEPTORS

NOTE:


If the end reaction of the mullion (mullion spacing (ft.) times height (ft) times specified wind load (psf), divided by two) is more than 500 LBS., the optional Mullion Anchor must be used. Consult Application Engineering.

NOTE:


Mullion Anchor not used with Lightweight Receptor.

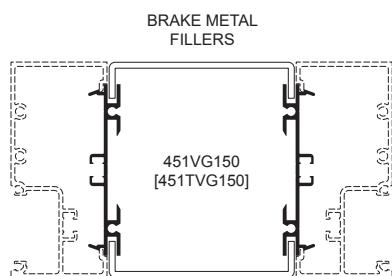


BRAKE METAL ADAPTOR

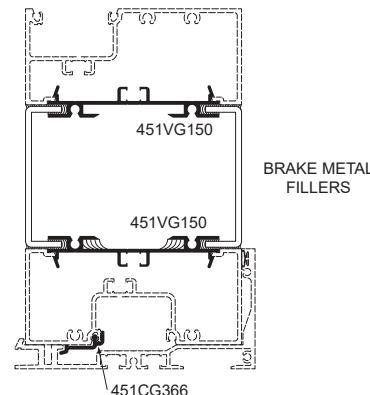

BRAKE METAL ADAPTOR AT HORIZONTAL

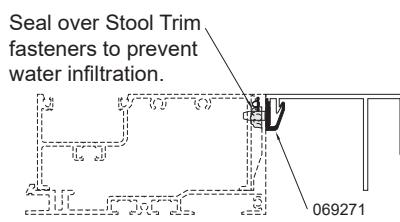

STOOL TRIM CLIP with HP FLASHING

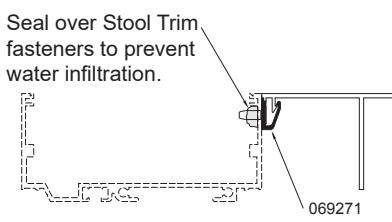










STOOL TRIM CLIP FOR STICK ASSEMBLY

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com

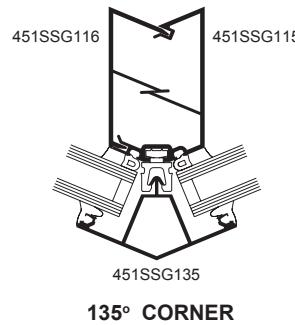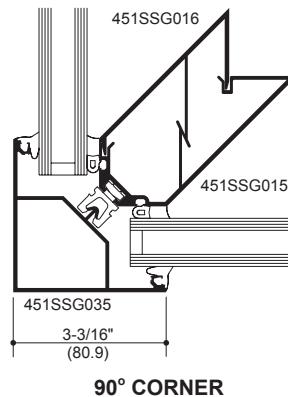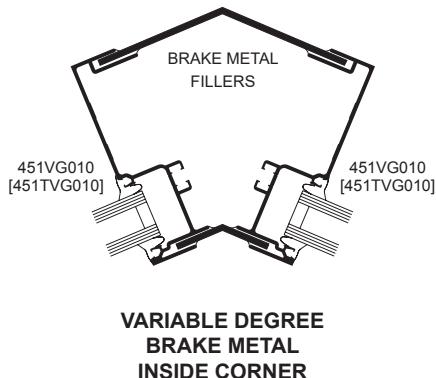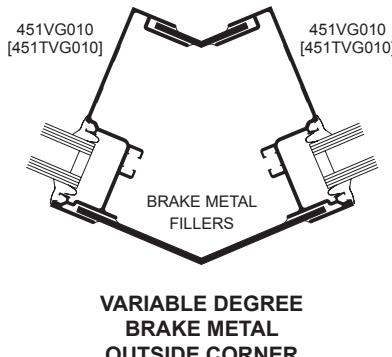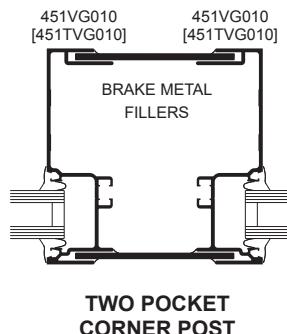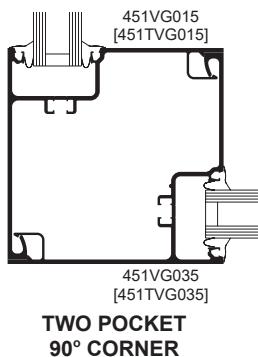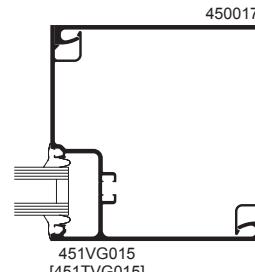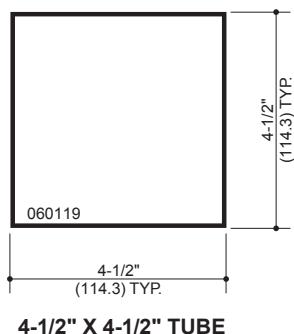


Additional information and CAD details are available at www.kawneer.com


INSIDE GLAZED

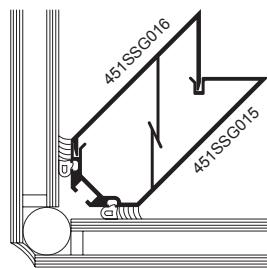


90° OUTSIDE CORNER

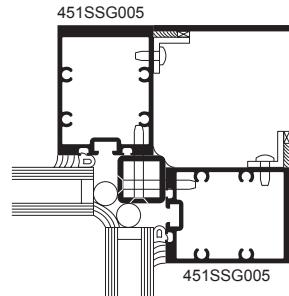

90° INSIDE CORNER

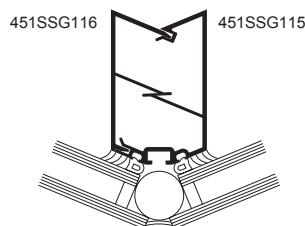


135° OUTSIDE CORNER

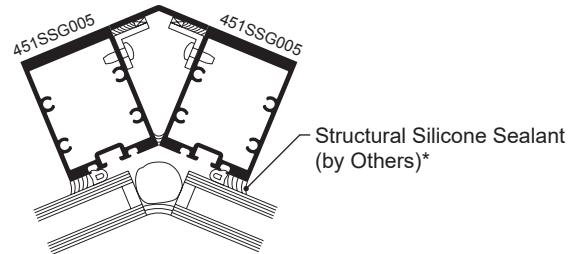


135° INSIDE CORNER


OUTSIDE GLAZED

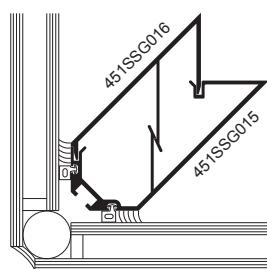


90° OUTSIDE CORNER

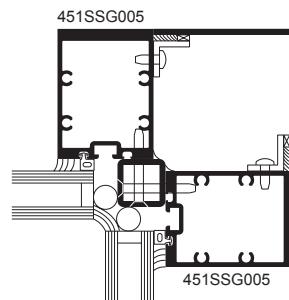

90° INSIDE CORNER

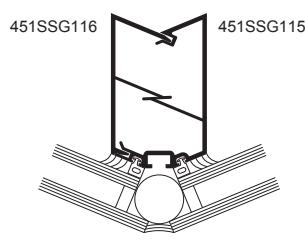

135° OUTSIDE CORNER

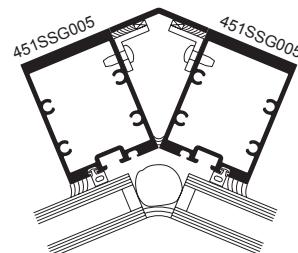

135° INSIDE CORNER

* INSTALLER NOTE: Installer is responsible for all required compatibility review and approvals with the Structural Silicone Manufacturer and the Insulating Glass Unit Manufacturer.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com


Trifab® VersaGlaze® 451 FRAMING INCORPORATING KAWNEER "190" DOORS.

DOOR FRAMING NON-THERMAL ONLY

NOTE: OTHER TYPES OF KAWNEER DOORS MAY BE USED WITH THIS FRAMING SYSTEM.
SEE ENTRANCE DETAILS FOR ADDITIONAL INFORMATION.

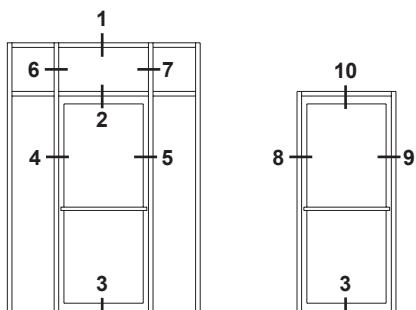


ELEVATIONS ARE NUMBER KEYED TO DETAILS

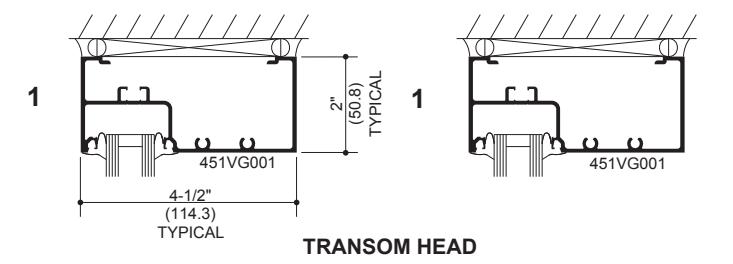


TRANSOM HEAD

TRANSOM BAR

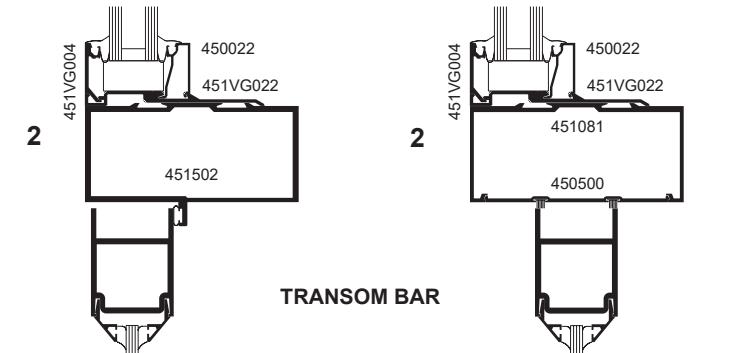


BOTTOM RAIL

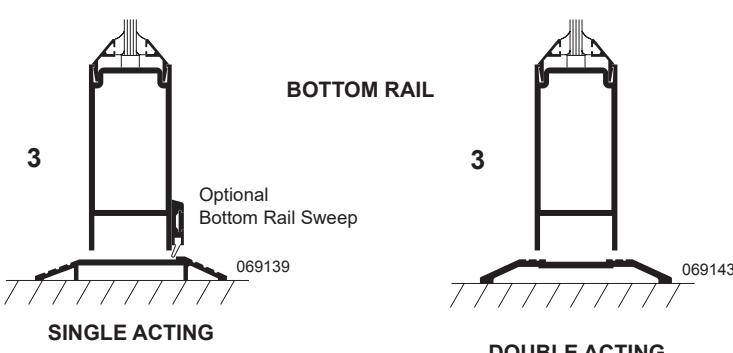


SINGLE ACTING

DOUBLE ACTING

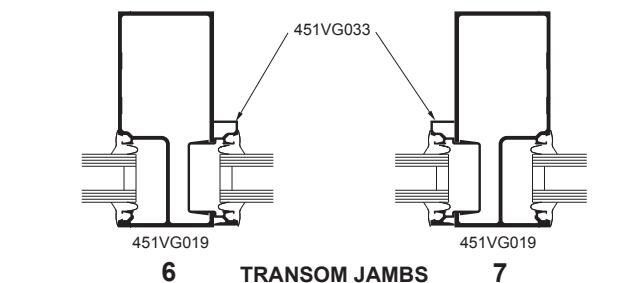


6 TRANSOM JAMBS 7

Transom area for both double or single acting doors with glass surround. Jambs above transom bar are routed out to accept glass holding insert.

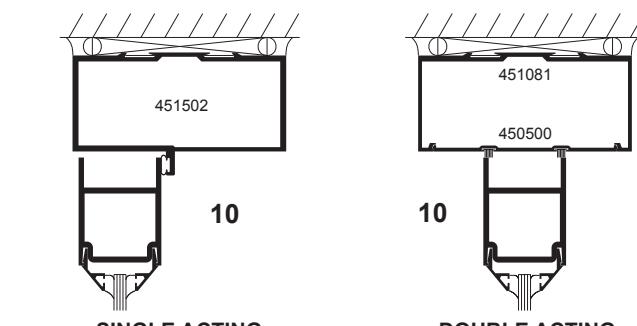


SINGLE ACTING HEADER

DOUBLE ACTING HEADER

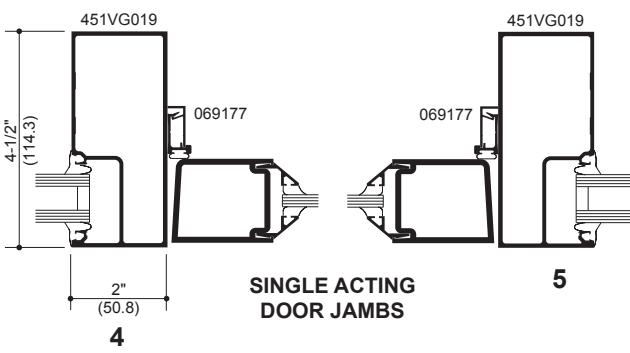

SINGLE ACTING DOOR JAMBS

5


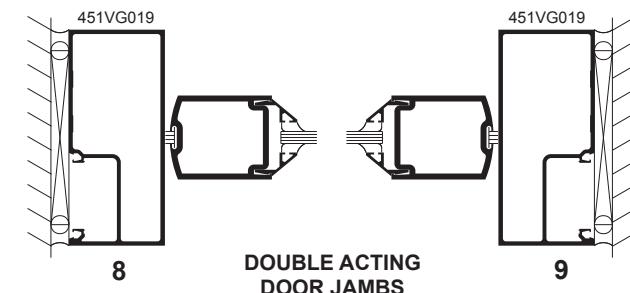


DOUBLE ACTING DOOR JAMBS


9

Additional information and CAD details are available at www.kawneer.com



OUTSWING CASEMENT VERTICAL SECTION

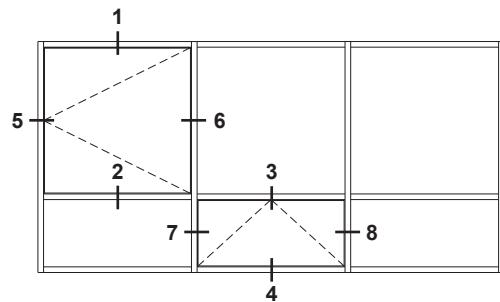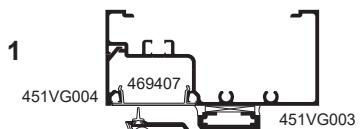


ELEVATION IS NUMBER KEYED TO DETAILS

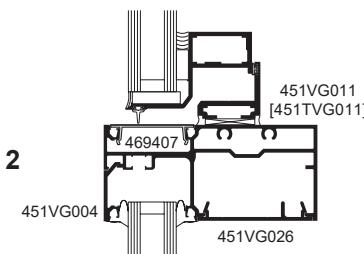


PROJECT-OUT VERTICAL SECTION

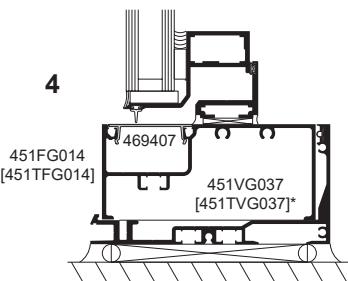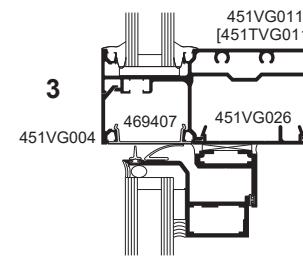

OUTSWING CASEMENT HORIZONTAL SECTION

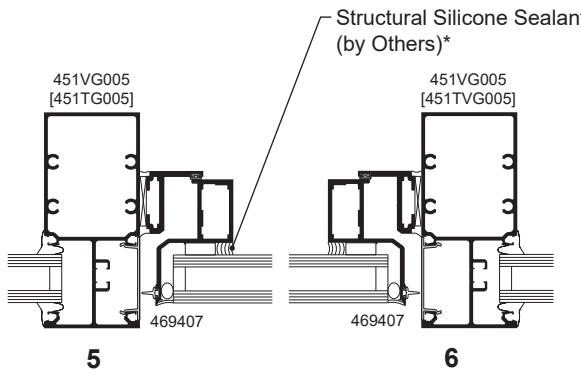

PROJECT-OUT HORIZONTAL SECTION

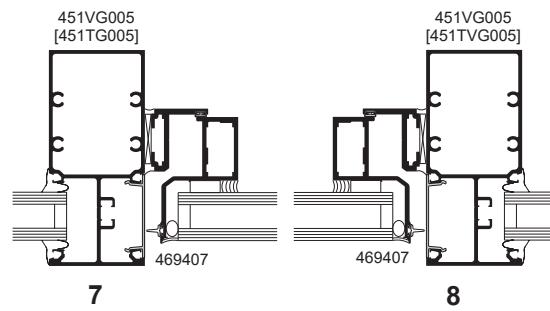

NOTE: Black spacer is recommended when 1" insulating glass is used.

* **INSTALLER NOTE:** Installer is responsible for all required compatibility review and approvals with the Structural Silicone Manufacturer and the Insulating Glass Unit Manufacturer.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.


Additional information and CAD details are available at www.kawneer.com

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

**PROJECT-OUT
VERTICAL SECTION**

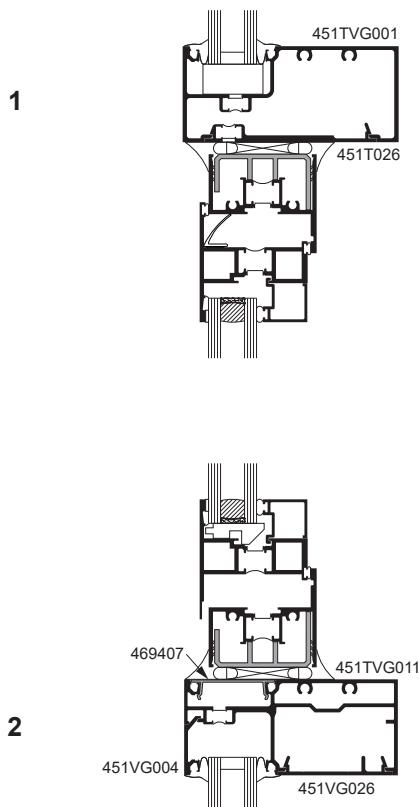


8225TL THERMAL WINDOWS SHOWN
NOTE: OTHER VENT TYPES CAN BE
ACCOMMODATED, CONSULT YOUR KAWNEER
REPRESENTATIVE FOR OTHER OPTIONS

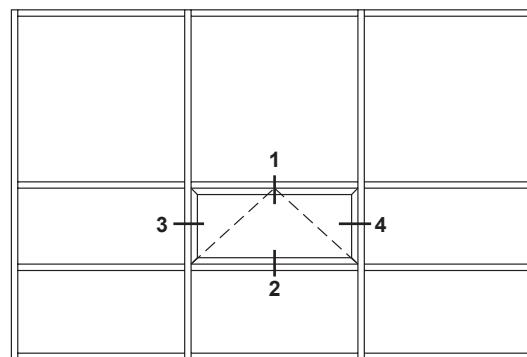

ELEVATION IS NUMBER KEYED TO DETAILS

**PROJECT-OUT
HORIZONTAL SECTION**

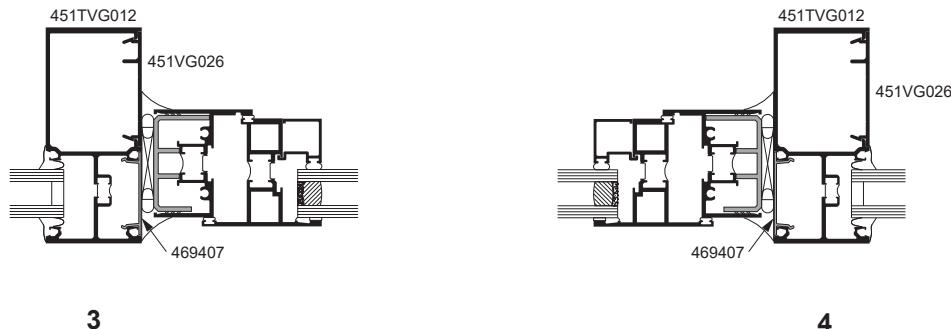

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.



Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

BASIC FRAMING DETAILS





(BACK - Inside Glazed - Stops Down)	48
(BACK - Outside Glazed - Stops Down)	49
MISCELLANEOUS FRAMING.....	50-51
CORNERS.....	52
ENTRANCE FRAMING.....	53

Additional information and CAD details are available at www.kawneer.com

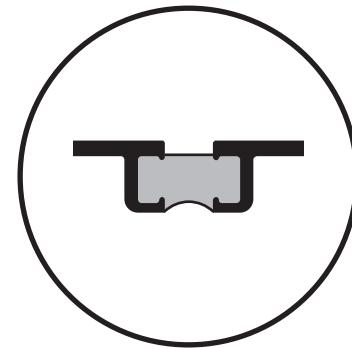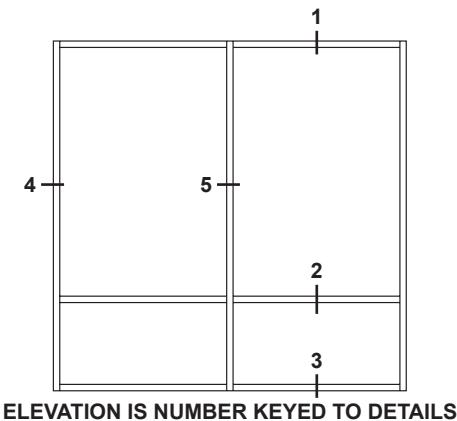





NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

SCREW SPLINE

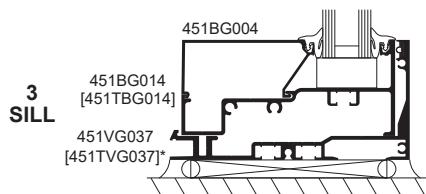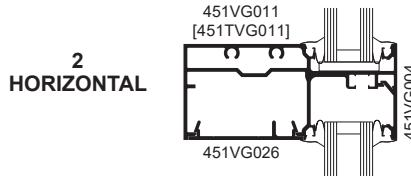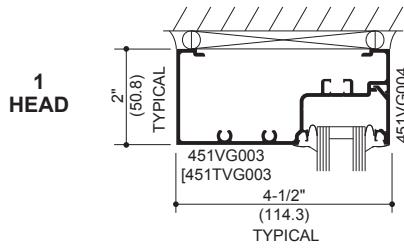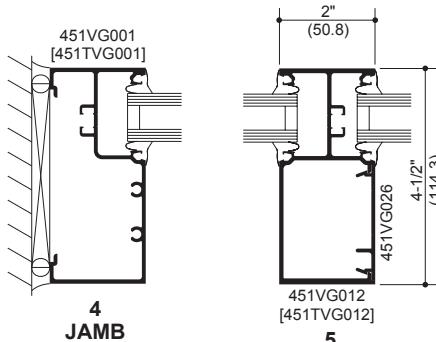





* HP Sill Flashing shown with optional gasket.

SHEAR BLOCK

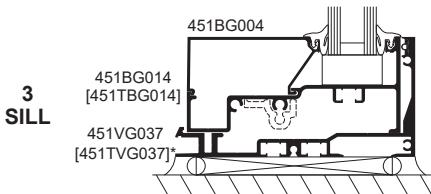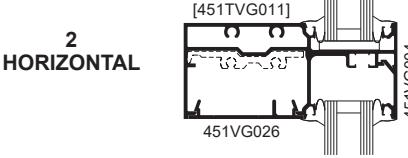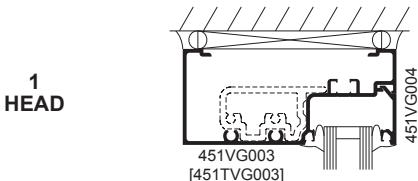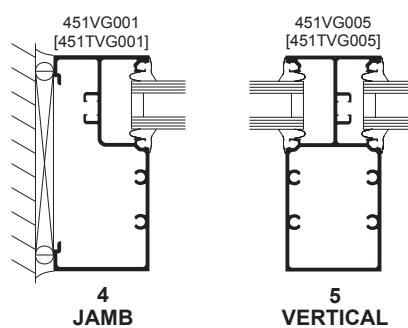

* HP Sill Flashing shown with optional gasket.

STICK

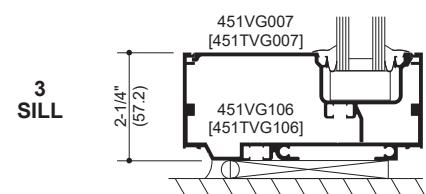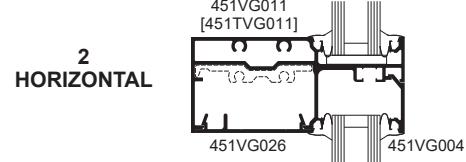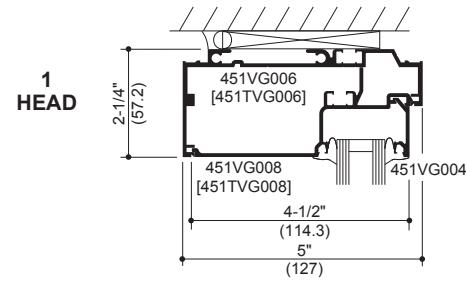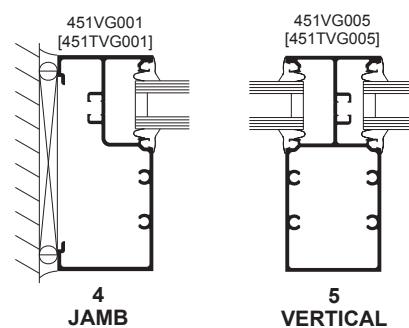



Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.


Additional information and CAD details are available at www.kawneer.com

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

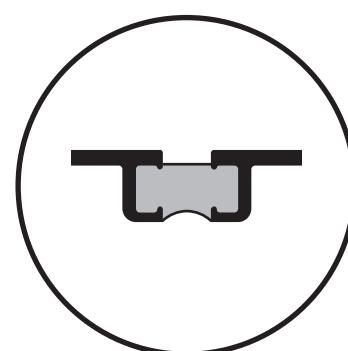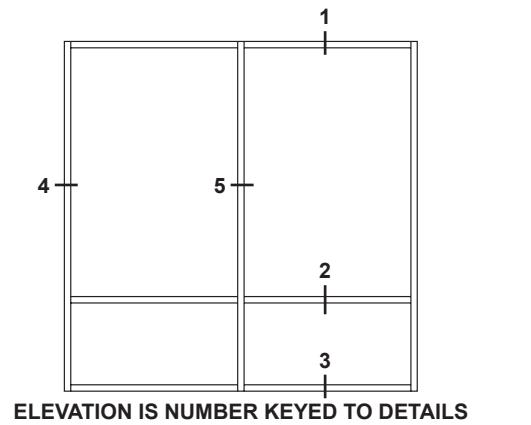


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

SCREW SPLINE

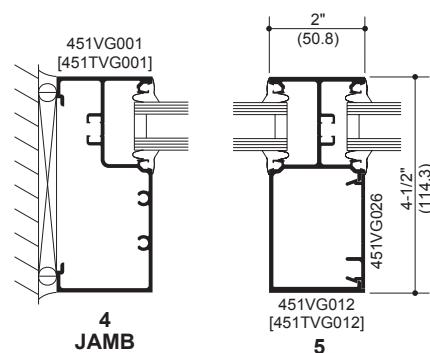


4 JAMB


5 VERTICAL

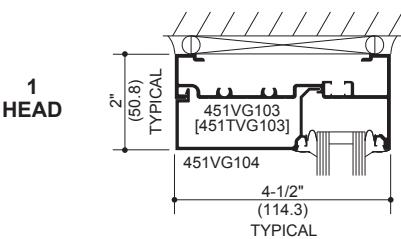

2 HORIZONTAL




3 SILL

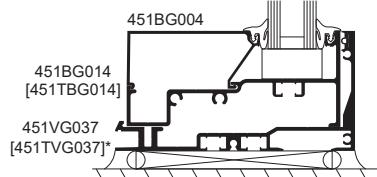


* HP Sill Flashing shown with optional gasket.

SHEAR BLOCK

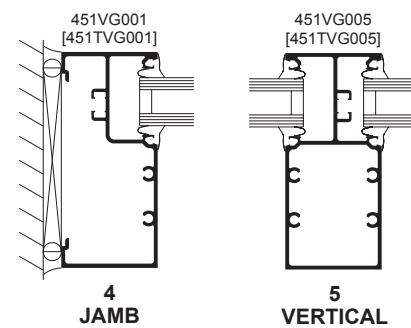


4 JAMB


5 VERTICAL

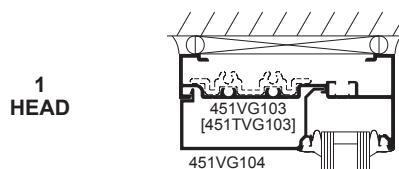

2 HORIZONTAL




3 SILL

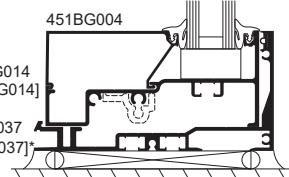


* HP Sill Flashing shown with optional gasket.

STICK

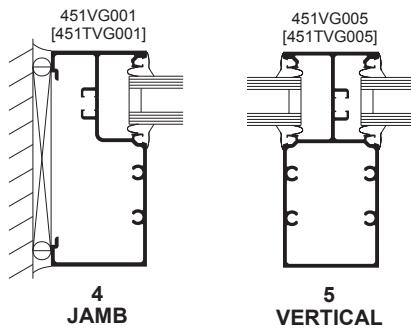


4 JAMB


5 VERTICAL

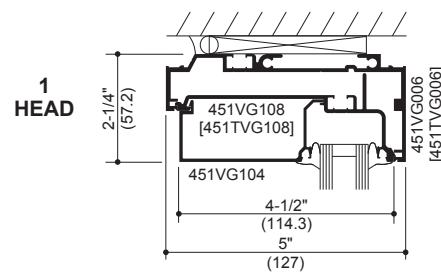


2 HORIZONTAL




3 SILL

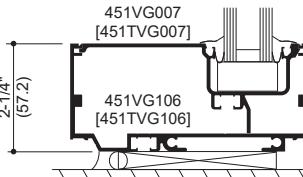


Additional information and CAD details are available at www.kawneer.com

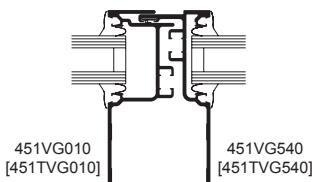










EXPANSION MULLION

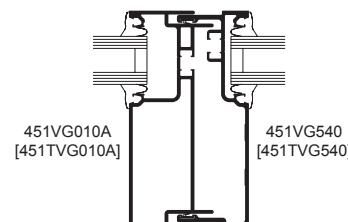

TUBULAR EXPANSION MULLION

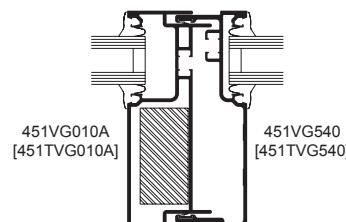

TUBULAR EXPANSION MULLION WITH STEEL

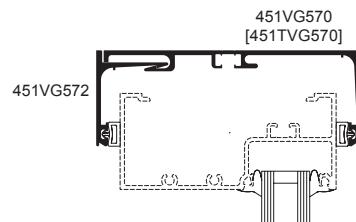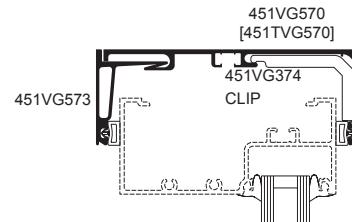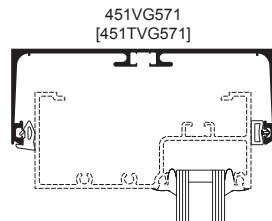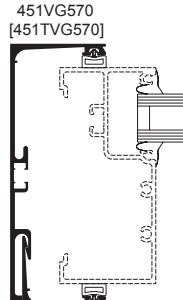
1/4" (6.4) INFILL
SNAP-IN ADAPTOR5/8" (15.9) INFILL
SNAP-IN ADAPTORPVC FLAT FILLER
(NON STRUCTURAL)THERMAL
FLAT FILLERSNAP-IN
FLAT FILLERSTANDARD - HEAD
COMPENSATING RECEPTORHEAVY WEIGHT - HEAD
COMPENSATING RECEPTOR
(EXTERIOR INSTALLED)STANDARD - HEAD
COMPENSATING RECEPTORJAMB
COMPENSATING RECEPTOR
(EXTERIOR INSTALLED)

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com





MULLION ANCHOR

NOTE:



If the end reaction of the mullion (mullion spacing (ft.) times height (ft) times specified wind load (psf), divided by two) is more than 500 LBS., the optional Mullion Anchor must be used. Consult Application Engineering.

NOTE:


Mullion Anchor not used with Lightweight Receptor.




OPTIONAL LIGHTWEIGHT CAN RECEPTORS

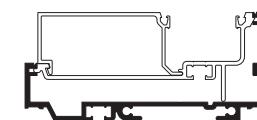


OPTIONAL UNEQUAL LEG CAN RECEPTORS

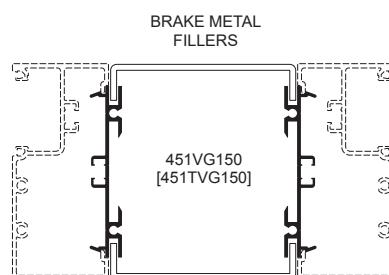


BRAKE METAL ADAPTOR

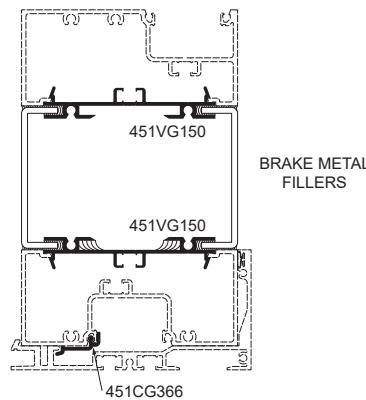

BRAKE METAL ADAPTOR AT HORIZONTAL


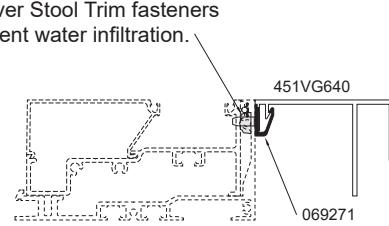


STOOL TRIM CLIP with HP FLASHING

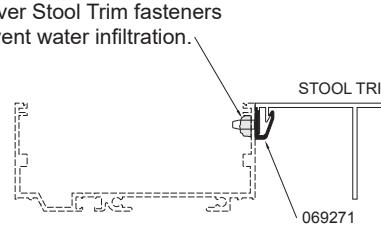


STOOL TRIM CLIP FOR STICK ASSEMBLY


Additional information and CAD details are available at www.kawneer.com

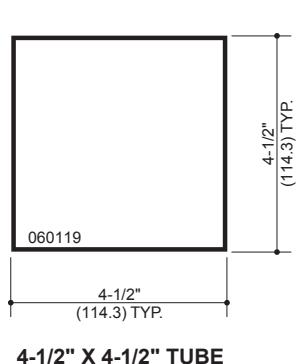


TWO PIECE
NO POCKET CORNER

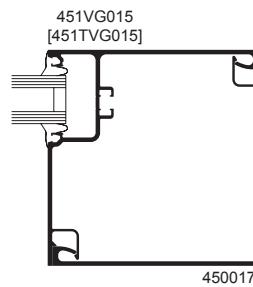


ONE POCKET
CORNER

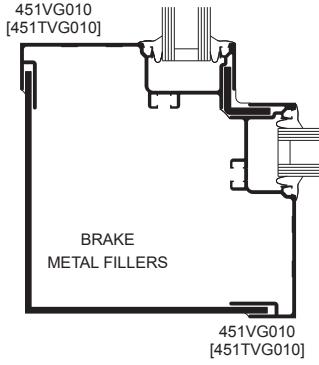


OUTSIDE
90° CORNER

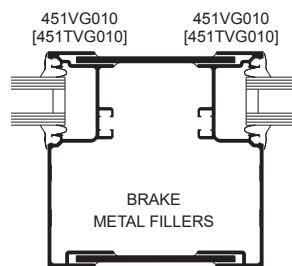


TWO POCKET
CORNER POST

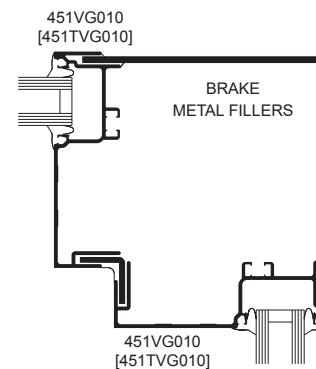

INSIDE
90° CORNER

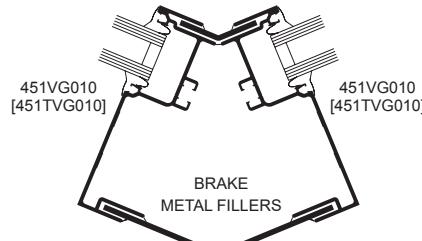

135° OUTSIDE
CORNER

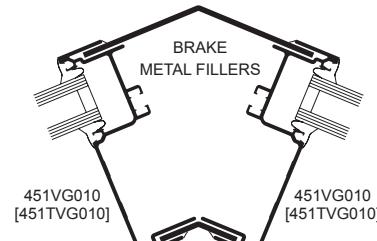

135° INSIDE
CORNER

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.


Additional information and CAD details are available at www.kawneer.com

TRIFAB® VersaGlaze® 451 FRAMING INCORPORATING KAWNEER "190" DOORS.


DOOR FRAMING NON-THERMAL ONLY

NOTE: OTHER TYPES OF KAWNEER DOORS MAY BE USED WITH THIS FRAMING SYSTEM.


SEE ENTRANCE DETAILS FOR ADDITIONAL INFORMATION.

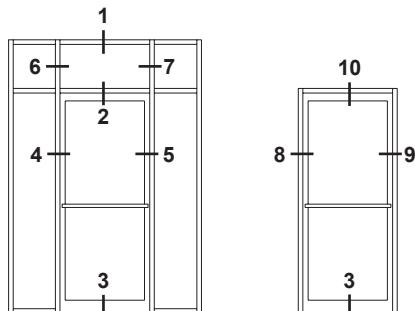


ELEVATIONS ARE NUMBER KEYED TO DETAILS

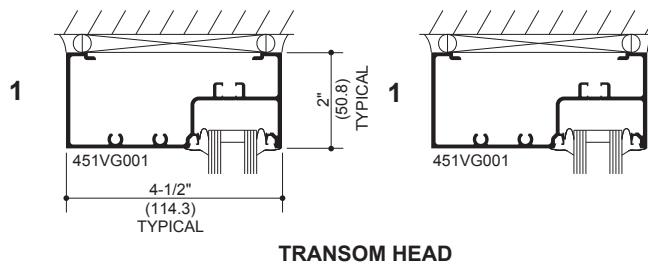

TRANSOM HEAD

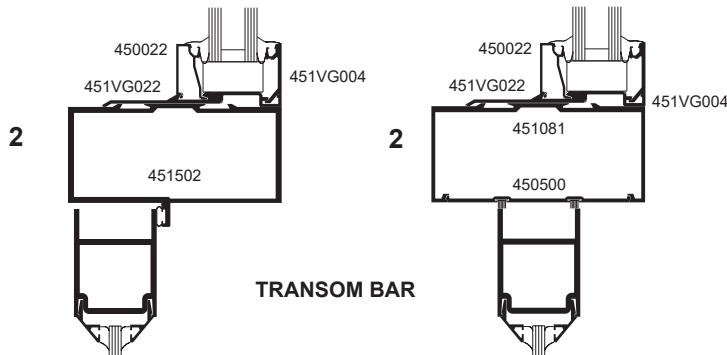


TRANSOM BAR

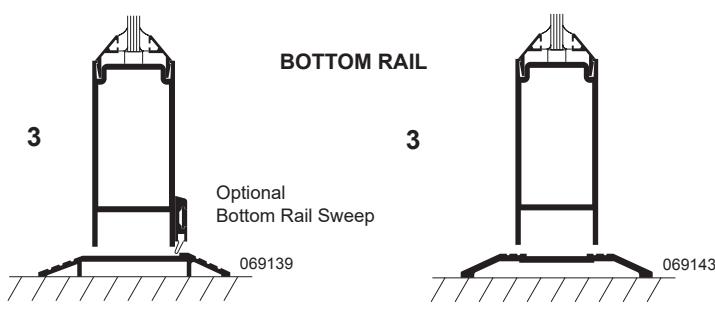


SINGLE ACTING

DOUBLE ACTING

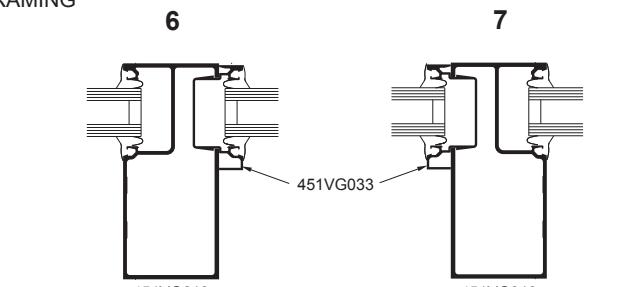


TRANSOM JAMBS


Transom area for both double or single acting doors with glass surround. Jambs above transom bar are routed out to accept glass holding insert.

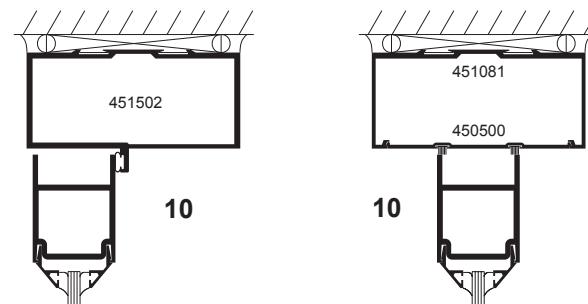

SINGLE ACTING HEADER

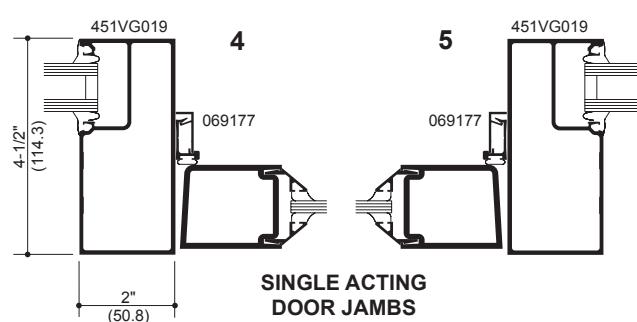

SINGLE ACTING DOOR JAMBS

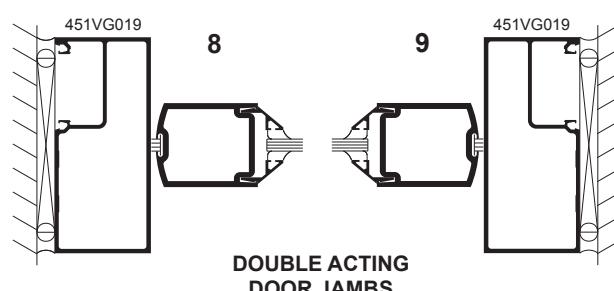

DOUBLE ACTING DOOR JAMBS

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

BASIC FRAMING DETAILS

SCREW SPLINE SYSTEM

(MULTI-PLANE - Inside Glazed - Stops Down).....	56
(MULTI-PLANE - Outside Glazed - Stops Down).....	57

SHEAR BLOCK SYSTEM

(MULTI-PLANE - Inside Glazed - Stops Down).....	58
(MULTI-PLANE - Outside Glazed - Stops Down).....	59


STICK SYSTEM

(MULTI-PLANE - Inside Glazed - Stops Down).....	60
(MULTI-PLANE - Outside Glazed - Stops Down).....	61


**(See appropriate Center, Front or Back Section
for Miscellaneous Details.)**

Additional information and CAD details are available at www.kawneer.com


SCREW SPLINE ASSEMBLY

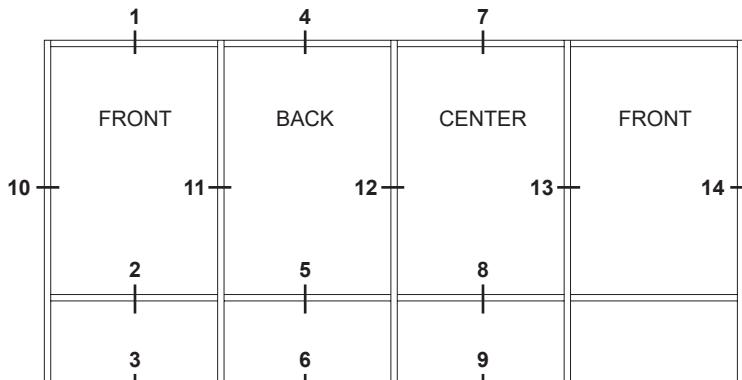

ELEVATION IS NUMBER KEYED TO DETAILS

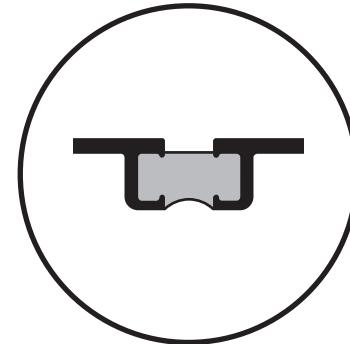


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

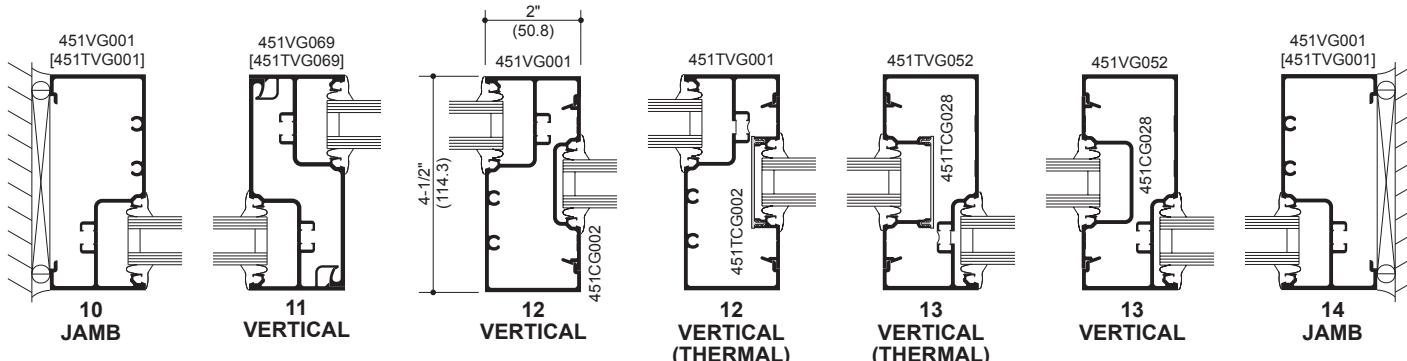


FRONT


See Pages 32 thru 45 for all FRONT details.

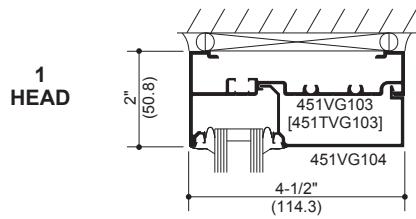

2 HORIZONTAL




3 SILL

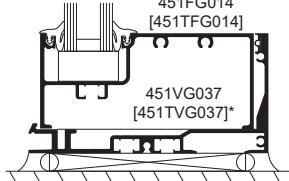


BACK


See Pages 48 thru 53 for all BACK details.

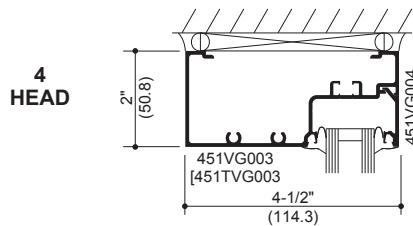

5 HORIZONTAL




6 SILL

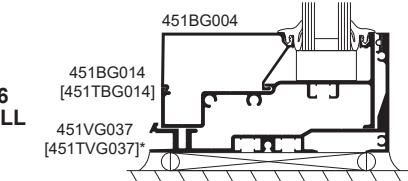


CENTER


See Pages 12 thru 30 for all CENTER details.

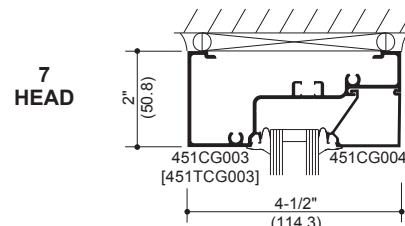

8 HORIZONTAL



9 SILL

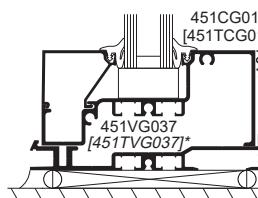

* HP Sill Flashing shown with optional gasket.

* HP Sill Flashing shown with optional gasket.

* HP Sill Flashing shown with optional gasket.


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com


SCREW SPLINE ASSEMBLY

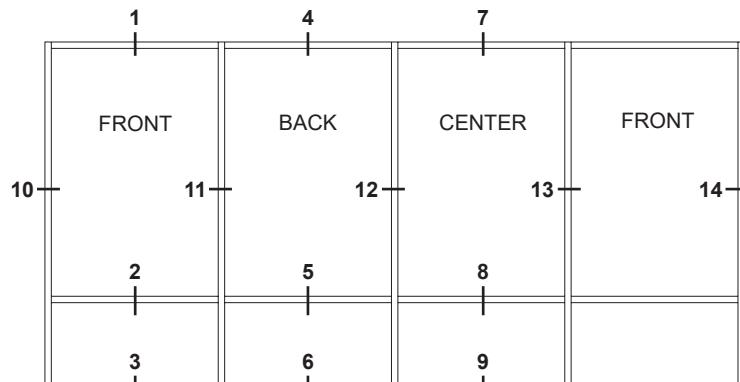

ELEVATION IS NUMBER KEYED TO DETAILS


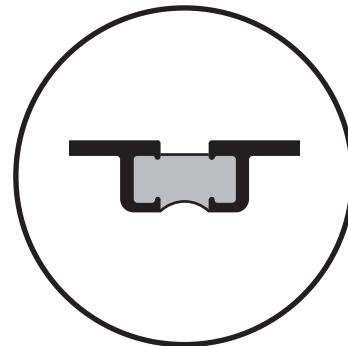


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

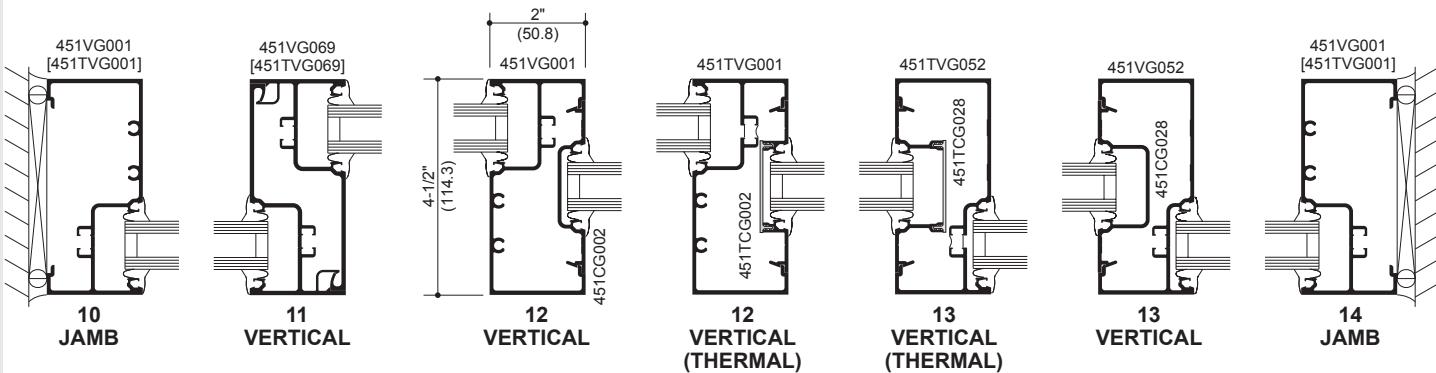



FRONT

See Pages 32 thru 45 for all FRONT details.

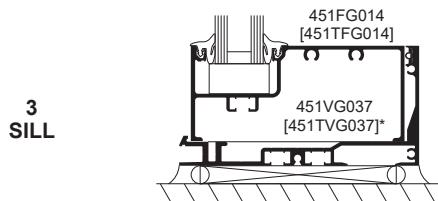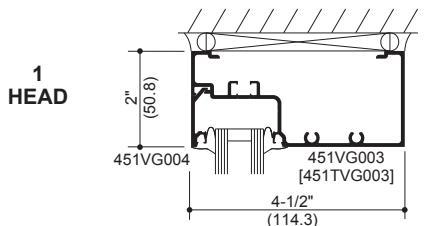




BACK

See Pages 48 thru 53 for all BACK details.

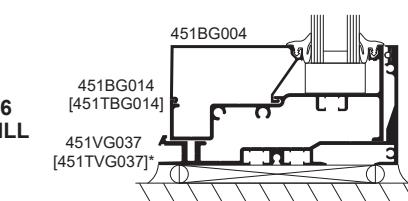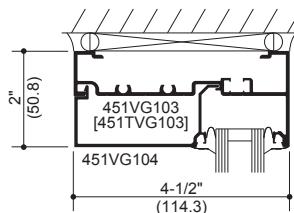

CENTER

See Pages 12 thru 30 for all CENTER details.

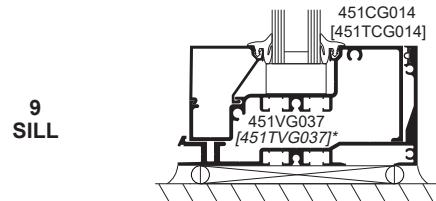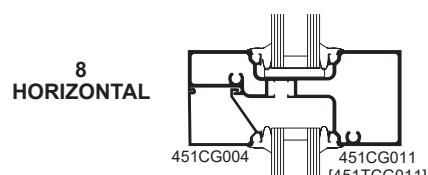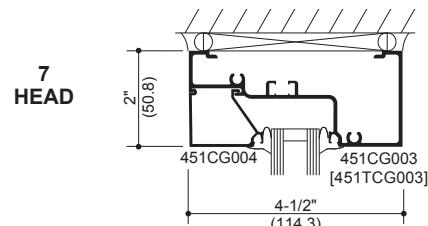


* HP Sill Flashing shown with optional gasket.

* HP Sill Flashing shown with optional gasket.


* HP Sill Flashing shown with optional gasket.

Additional information and CAD details are available at www.kawneer.com





SHEAR BLOCK ASSEMBLY

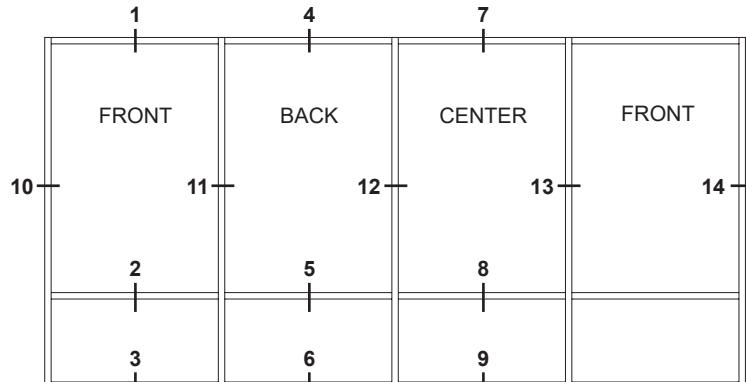

ELEVATION IS NUMBER KEYED TO DETAILS

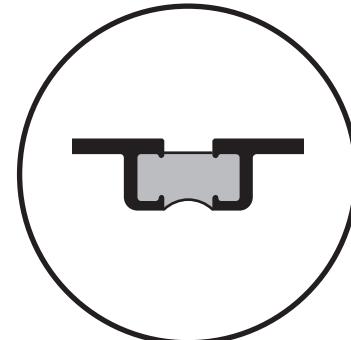


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

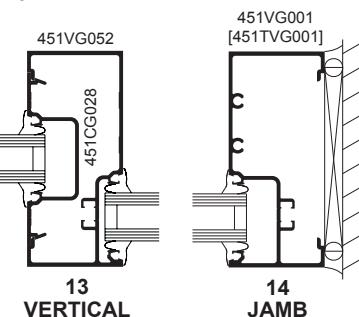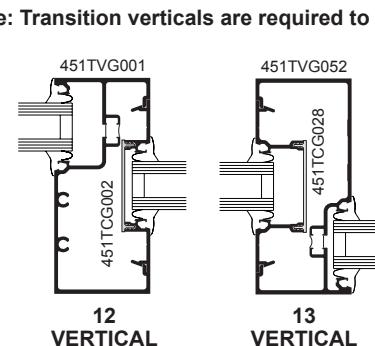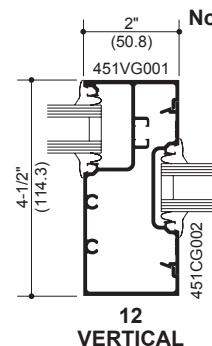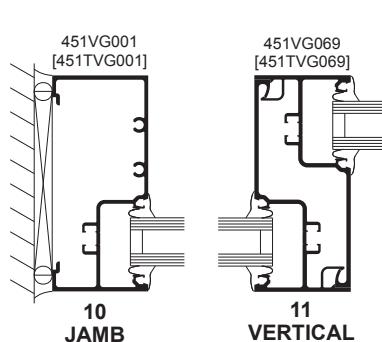


FRONT


See Pages 32 thru 45 for all FRONT details.

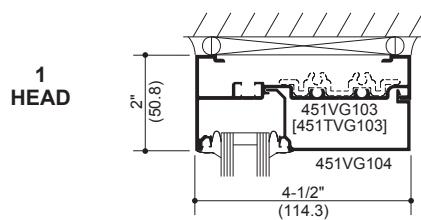

2 HORIZONTAL



3 SILL

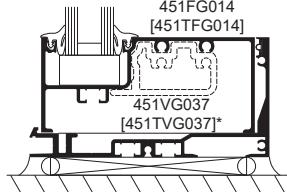


* HP Sill Flashing shown with optional gasket.


BACK

See Pages 48 thru 53 for all BACK details.


4 HEAD

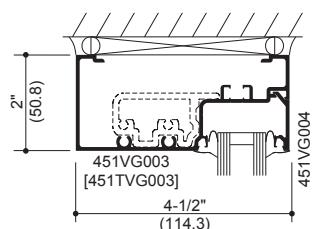

5 HORIZONTAL



6 SILL

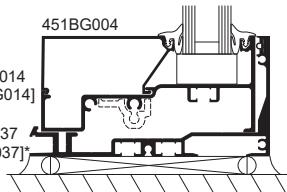


* HP Sill Flashing shown with optional gasket.


CENTER

See Pages 12 thru 30 for all CENTER details.


7 HEAD

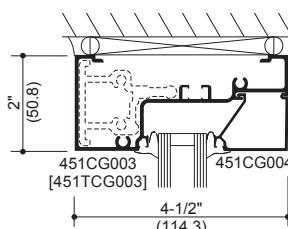

8 HORIZONTAL



9 SILL

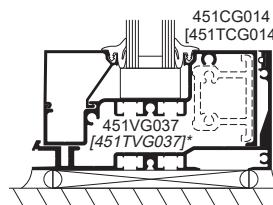

* HP Sill Flashing shown with optional gasket.



Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com

SHEAR BLOCK ASSEMBLY

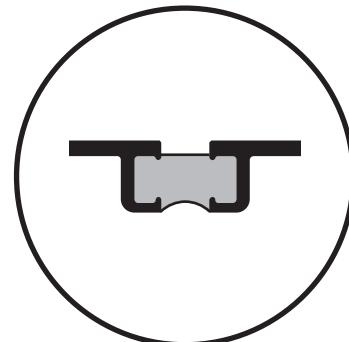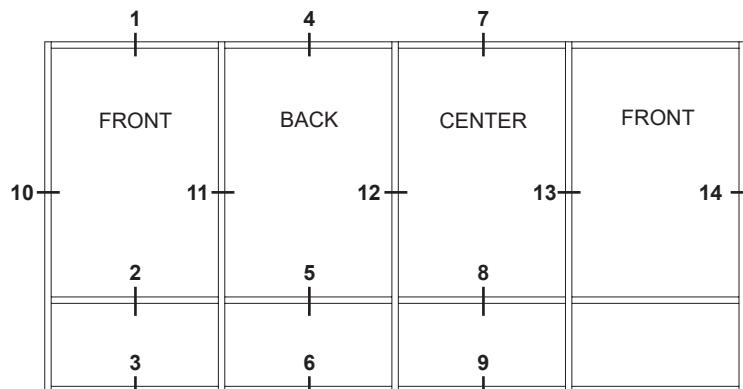


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

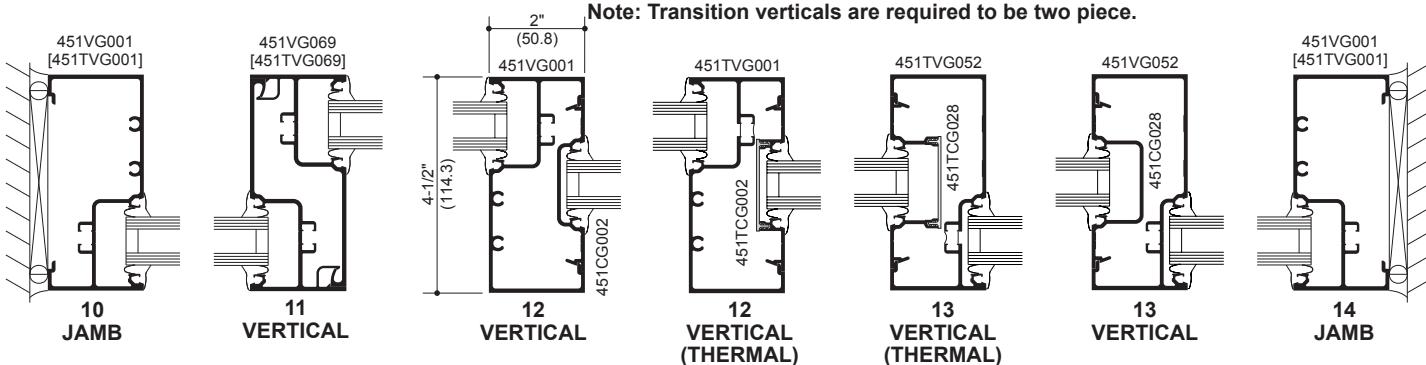

FRONT


See Pages 32 thru 45 for all FRONT details.

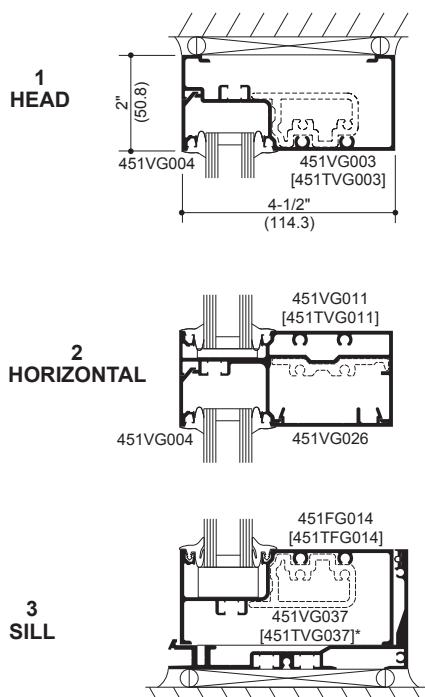

* HP Sill Flashing shown with optional gasket.

BACK


See Pages 48 thru 53 for all BACK details.

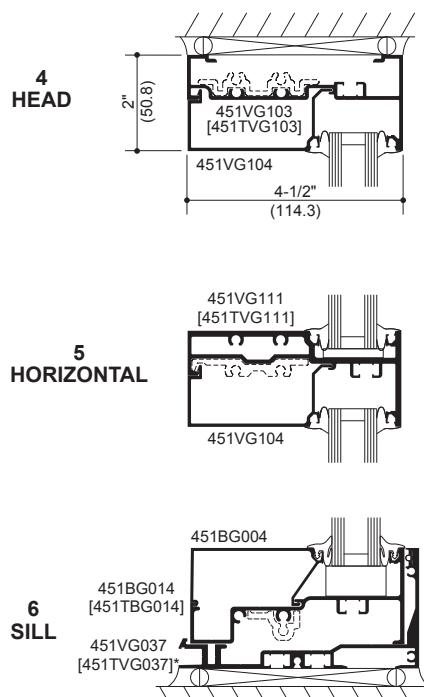

* HP Sill Flashing shown with optional gasket.

CENTER



See Pages 12 thru 30 for all CENTER details.

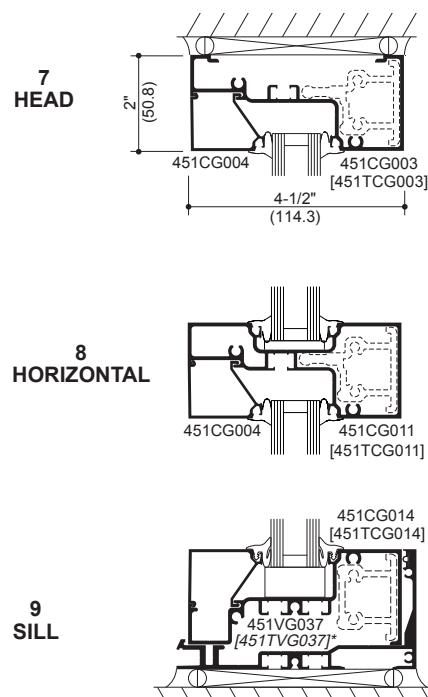


* HP Sill Flashing shown with optional gasket.

Additional information and CAD details are available at www.kawneer.com

STICK ASSEMBLY

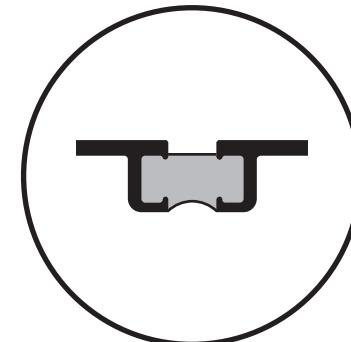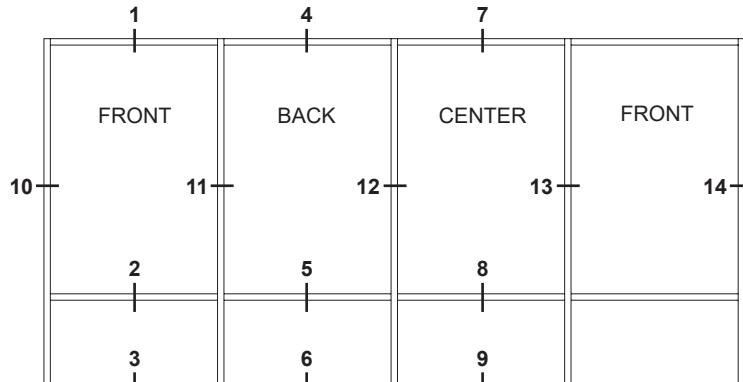


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

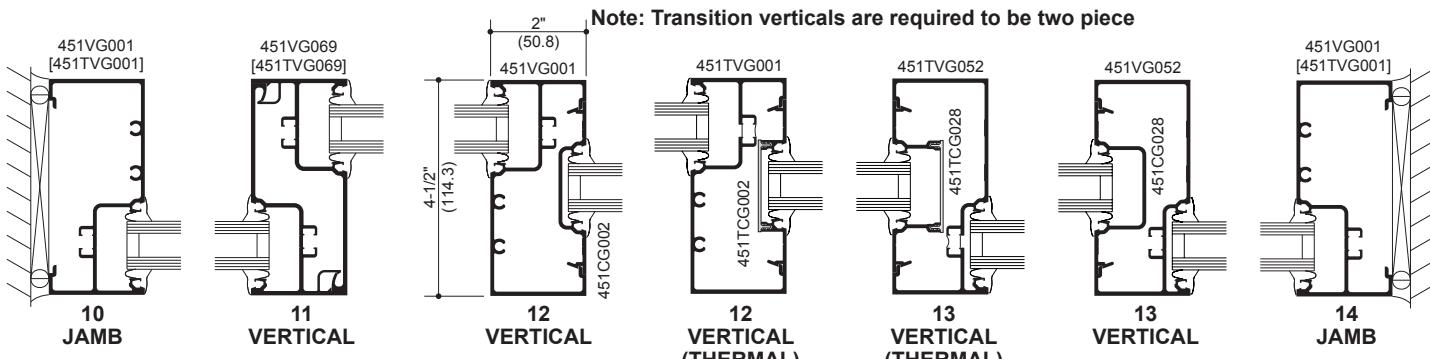


FRONT


See Pages 32 thru 45 for all FRONT details.

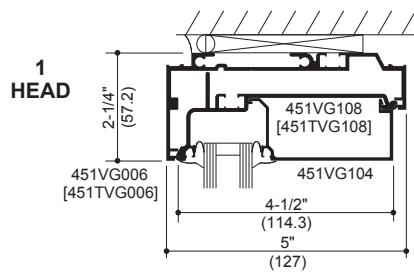

2 HORIZONTAL




3 SILL

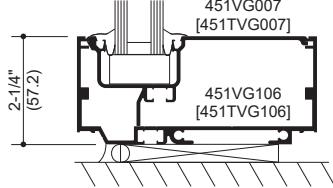


BACK


See Pages 48 thru 53 for all BACK details.

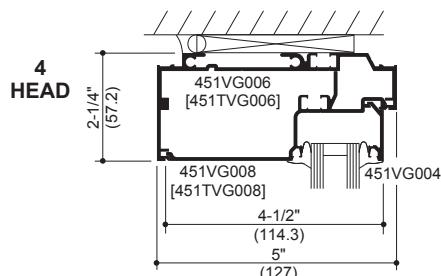

5 HORIZONTAL

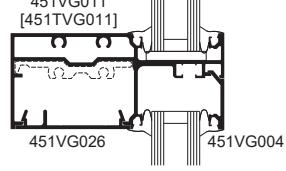


6 SILL

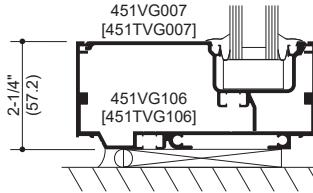


CENTER


See Pages 12 thru 30 for all CENTER details.

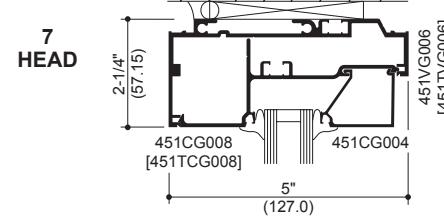

8 HORIZONTAL

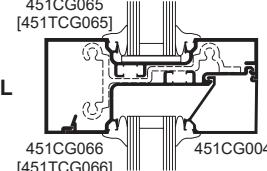

9 SILL


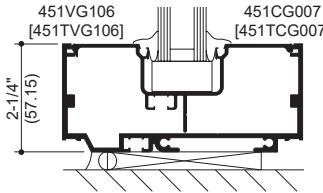


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Additional information and CAD details are available at www.kawneer.com

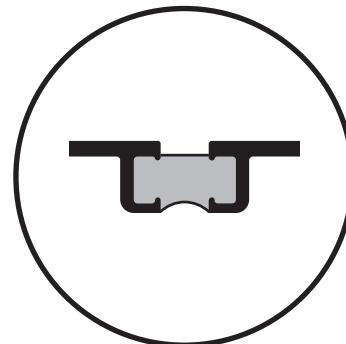
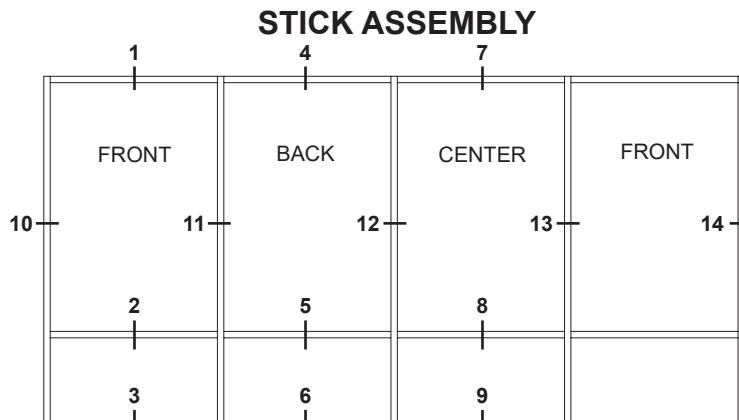


NUMBERS IN BRACKETS ARE THERMALLY BROKEN MEMBERS

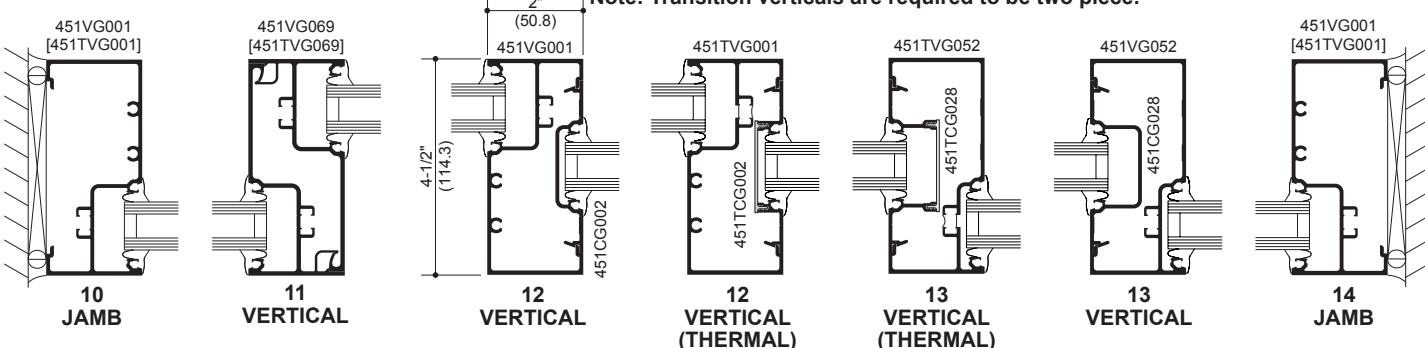




FRONT

See Pages 32 thru 45 for all FRONT details.

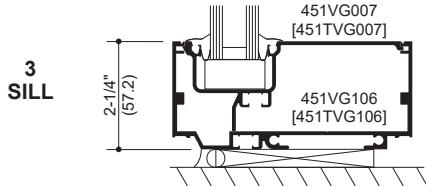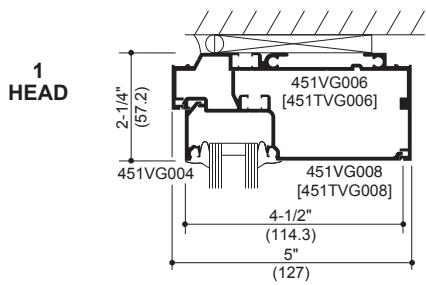




BACK

See Pages 48 thru 53 for all BACK details.

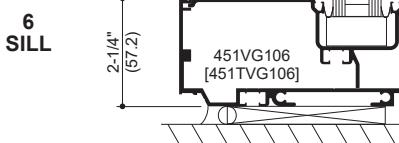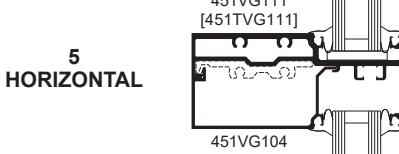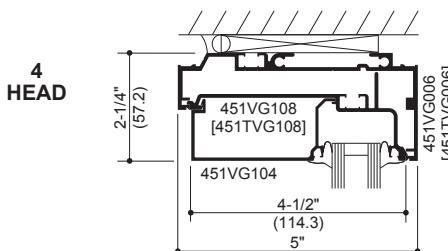

CENTER

See Pages 12 thru 30 for all CENTER details.

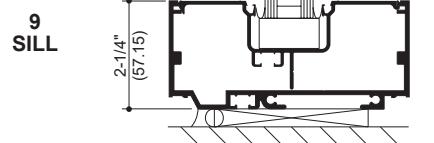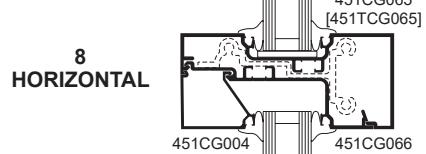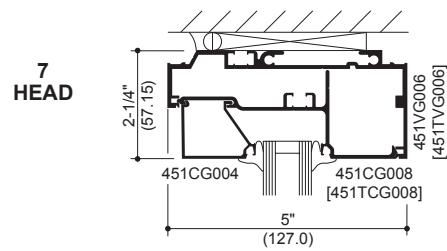

The following applications utilize Tremco Proglaze® ETA Connections as the transition assembly from the wall air/vapor barrier membrane to the storefront framing perimeter. Corners are sealed with either Proglaze® ETA 3D molded silicone corners or lapped Proglaze® ETA silicone sheet material. Transition assembly components are set in Tremco Spectrem® 1 silicone sealant. For complete installation instructions of Tremco Proglaze® ETA products, contact your local Tremco representative or visit www.tremcosealants.com.

For integration of a silicone engineered transition assembly, the Trifab® storefront system must use continuous head and jamb mullion fillers, a head receptor with continuous jamb fillers or a head receptor with jamb receptors.


Reference air/vapor barrier installation instructions 451VG977EN. All storefront framing to be installed according to applicable Kawneer storefront system installation instructions, project specific plans, specifications and shop details.

Storefront installations require the sill to be structurally supported directly under the glass setting blocks and mullion locations, as well as where the sill is anchored to the substrate. Any projecting or cantilevered sill applications that are not supported must be reviewed by Kawneer application engineering.


Installer to independently confirm sealant compatibility and adhesion with all job specific storefront framing materials, silicone ETA sheet material and wall AVB material.

(451 center plane details shown, 451T and front/back/multi-plane similar.





CONTINUOUS HEAD AND JAMB MULLION FILLERS

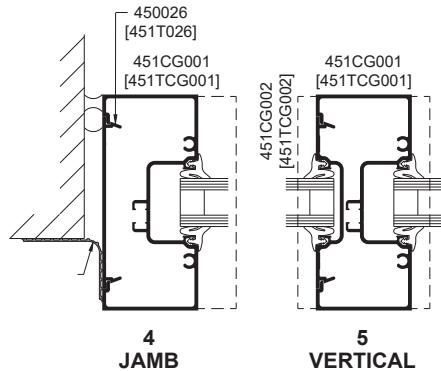

HEAD RECEPTOR WITH CONTINUOUS JAMB FILLERS (EXTERIOR INSTALLED)

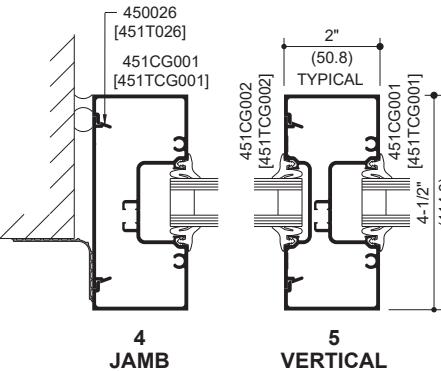

HEAD AND JAMB RECEPTORS (EXTERIOR INSTALLED)

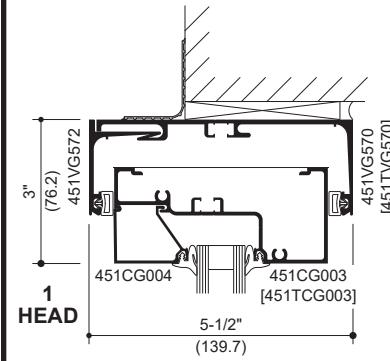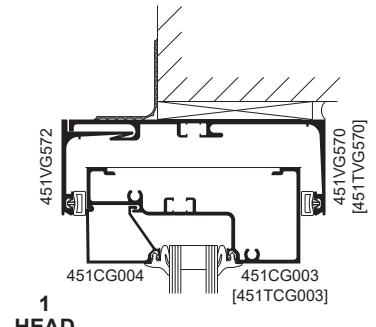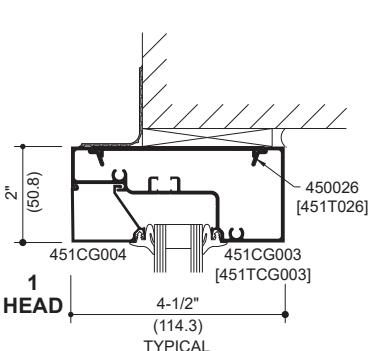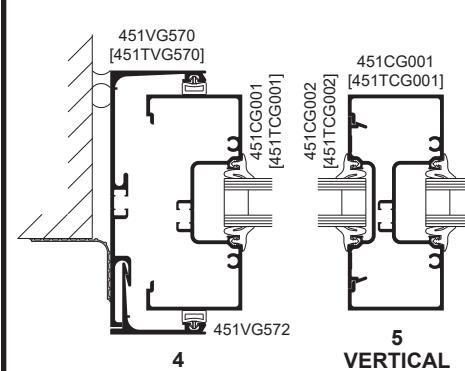

* HP Sill Flashing shown with optional gasket.

* HP Sill Flashing shown with optional gasket.

* HP Sill Flashing shown with optional gasket.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

WIND LOAD CHARTS (CENTER)	
TF VG 451 (Non-Thermal).....	65-69
TF VG 451T (Thermal).....	70-74
WIND LOAD CHARTS (FRONT or BACK)	
TF VG 451 (Non-Thermal).....	75-78
TF VG 451T (Thermal).....	79-81
WIND LOAD CHARTS (FRONT or BACK)	
TF VG 451/451T (SSG Mullions)	82
WIND LOAD CHARTS (MULTI PLANE)	
TF VG 451 (Non-Thermal).....	83
TF VG 451T (Thermal).....	84
WIND LOAD CHARTS (ENTRANCE FRAMING)	
TF VG 451/451T	85-86
DEADLOAD CHARTS	
TF VG 451/451T	87-88
END REACTION CHARTS	89
THERMAL CHARTS	
EXAMPLE CALCULATION.....	90
TF VG 451 (CENTER – Non-Thermal).....	91-93
TF VG 451 Pre-Glazed (CENTER - Non-Thermal).....	94-96
TF VG 451T (CENTER – Thermal).....	97-99
TF VG 451T Pre-Glazed (CENTER – Thermal)	100-102
TF VG 451T (FRONT – Thermal)	103-105
TF VG 451T (BACK – Thermal)	106-108
TF VG 451T with Steel (CENTER)	109-111

WIND LOAD CHARTS

Mullions are designed for deflection limitations in accordance with AAMA TIR-A11 of L/175 up to 13' 6" and L/240 +1/4" above 13' 6". These curves are for mullions WITH HORIZONTALS and are based on engineering calculations for stress and deflection. Allowable wind load stress for ALUMINUM 15,152 psi (104 MPa), STEEL 30,000 psi (207 MPa). Charted curves, in all cases are for the limiting value. Wind load charts contained herein are based upon nominal wind load utilized in allowable stress design. A conversion from Load Resistance Factor Design (LRFD) is provided. To convert ultimate wind loads to nominal loads, multiply ultimate wind loads by a factor of 0.6 per ASCE/SEI 7. A 4/3 increase in allowable stress has not been used to develop these curves. For special situations not covered by these curves, contact your Kawneer representative for additional information.

If the end reaction of the mullion [mullion spacing (ft.) times height (ft.) times specified wind load (psf) divided by two] is more than 500 lbs., the optional Heavyweight Compensating Receptor Face/Reinforcing Clip (Screw Spline/Shear Block systems) or Mullion Anchors (Stick system) must be used. Consult Application Engineering. (*Mullion Anchor not used with Standard Receptor.*)

DEADLOAD CHARTS







Horizontal or deadload limitations are based upon 1/8" (3.2), maximum allowable deflection at the center of an intermediate horizontal member. The accompanying charts are calculated for 1" (25.4) thick insulating glass or 1/4" (6.4) thick glass supported on two setting blocks placed at the loading points shown.

NOTE: Charts are for THERMAL and NON-THERMAL members.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

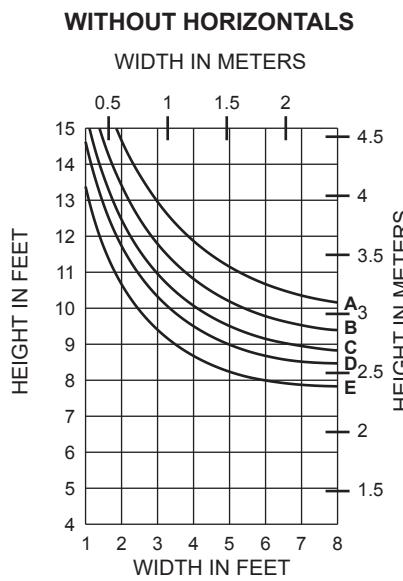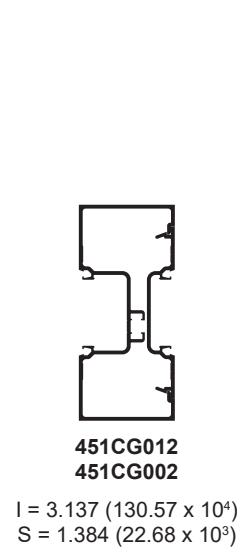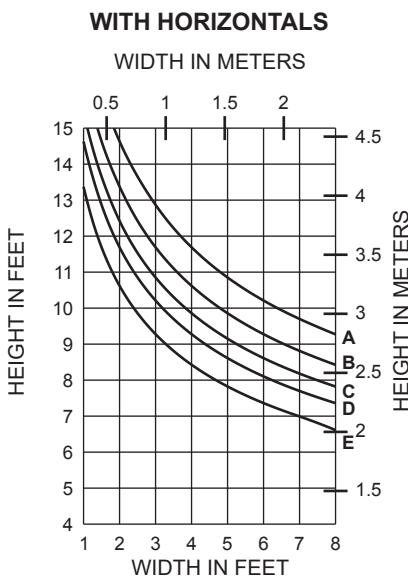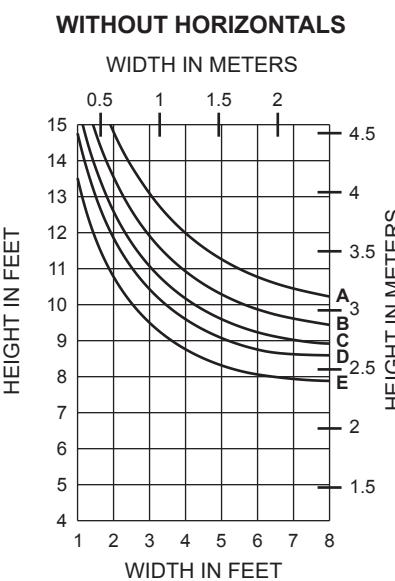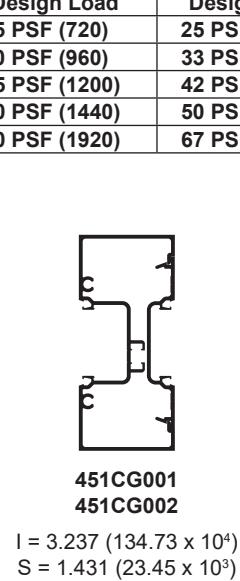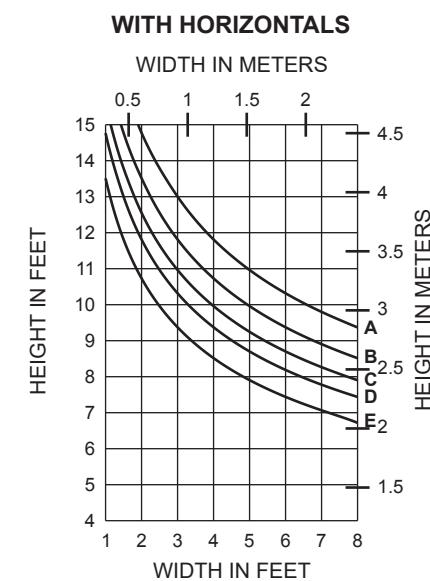


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

WITH HORIZONTALS


WIDTH IN METERS

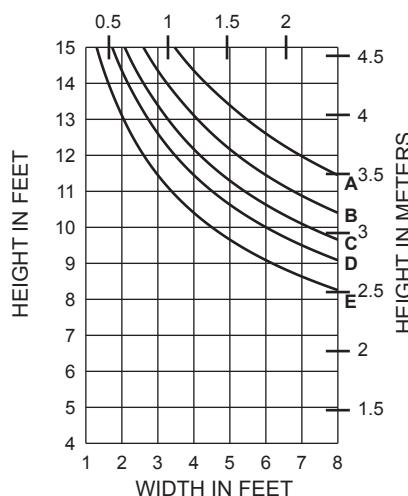

Allowable Stress Design Load

LRFD Ultimate Design Load

A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)





$$I = 5.907 (245.86 \times 10^4)$$

$$S = 2.615 (42.85 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS


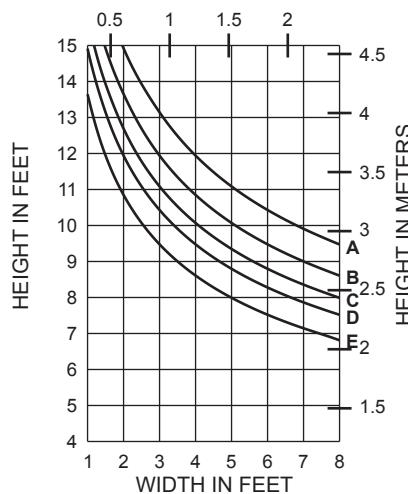


$$I = 3.346 (139.27 \times 10^4)$$

$$S = 1.474 (24.15 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS

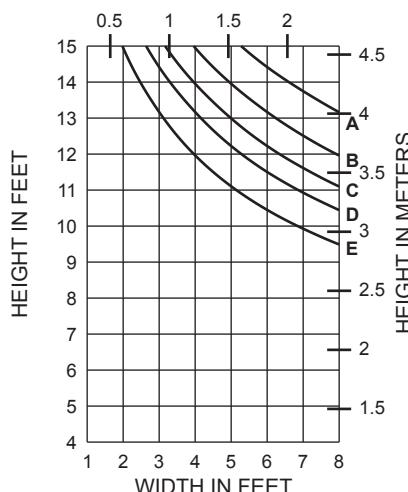

$$I_A = 3.346 (139.27 \times 10^4)$$


$$S_A = 1.474 (24.15 \times 10^3)$$

$$I_s = 1.935 (80.54 \times 10^4)$$

$$S_s = 0.938 (15.37 \times 10^3)$$


WITHOUT HORIZONTALS

WIDTH IN METERS

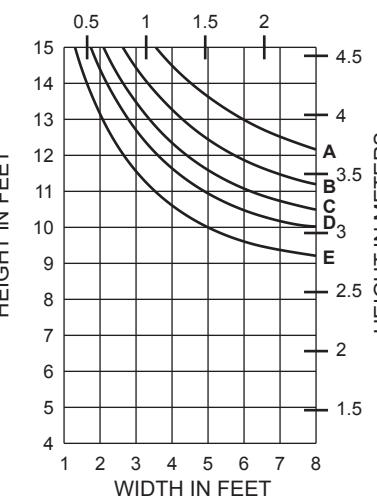


WITHOUT HORIZONTALS

WIDTH IN METERS

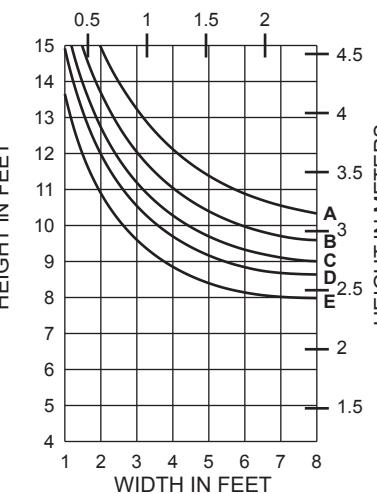

WITHOUT HORIZONTALS

WIDTH IN METERS

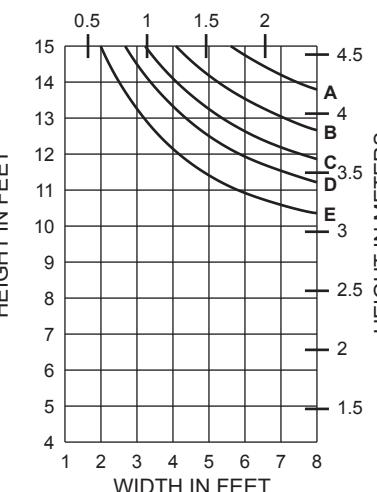



Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

WITH HORIZONTALS

WIDTH IN METERS

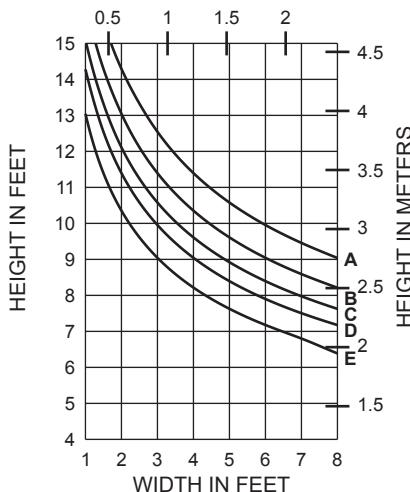


451CG005

$$I = 2.907 (120.99 \times 10^4)$$

$$S = 1.292 (21.17 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS

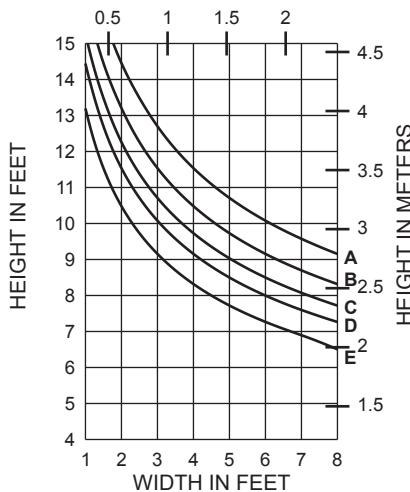



451CG005A

$$I = 3.016 (125.53 \times 10^4)$$

$$S = 1.340 (21.96 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS

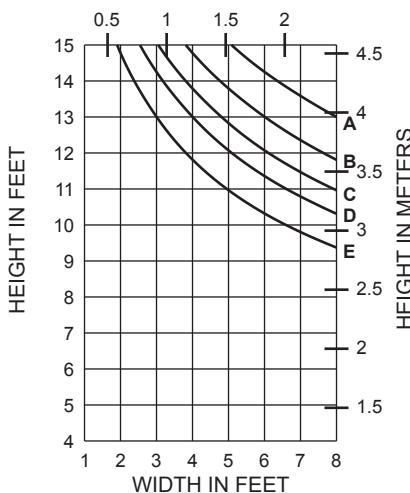451CG005A
with 450110 STEEL

$$I_A = 3.016 (125.53 \times 10^4)$$


$$S_A = 1.340 (21.96 \times 10^3)$$

$$I_S = 1.935 (80.54 \times 10^4)$$

$$S_S = 0.938 (15.37 \times 10^3)$$


WITHOUT HORIZONTALS

WIDTH IN METERS

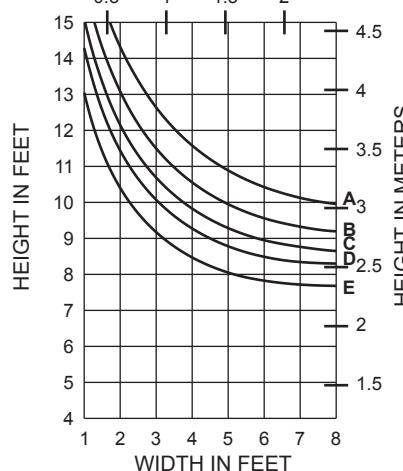


WITHOUT HORIZONTALS

WIDTH IN METERS

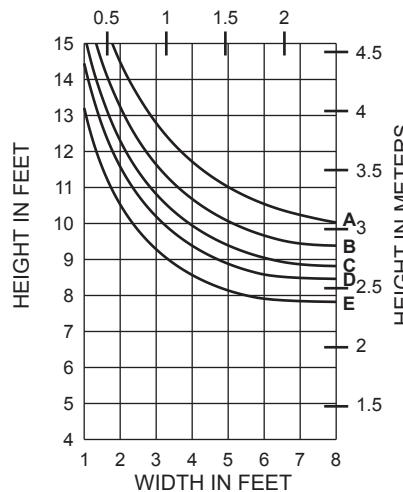


WITHOUT HORIZONTALS

WIDTH IN METERS

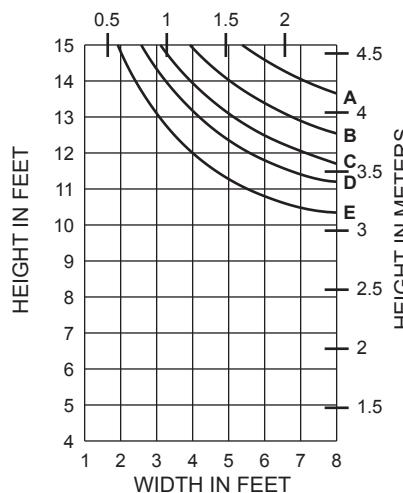

WITH HORIZONTALS

WIDTH IN METERS

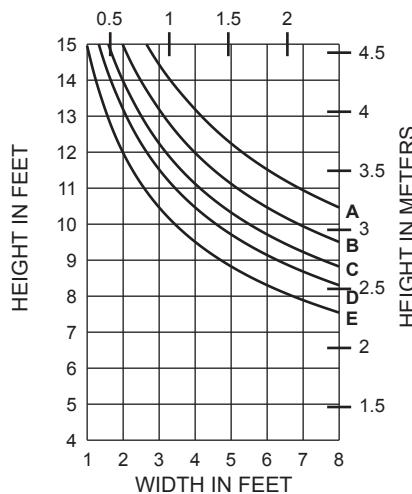
451CG001A
451CG002

$$I = 4.507 (187.59 \times 10^4)$$

$$S = 1.993 (32.66 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS


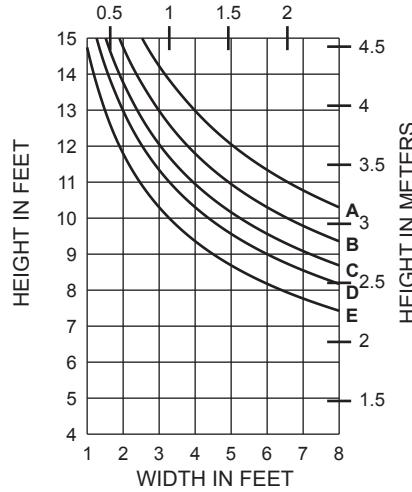
451CG010
451CG540

$$I = 4.301 (179.02 \times 10^4)$$

$$S = 1.886 (30.91 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS

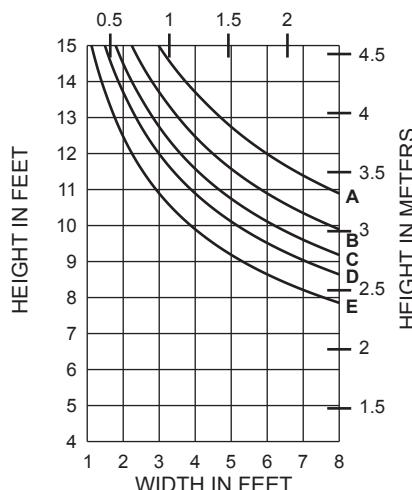
451CG010A
451CG540

$$I = 5.083 (211.57 \times 10^4)$$

$$S = 2.259 (37.02 \times 10^3)$$


WITHOUT HORIZONTALS

WIDTH IN METERS

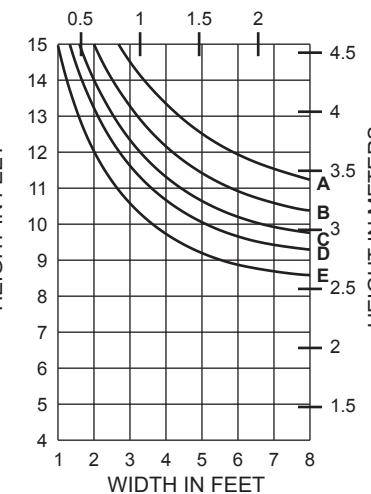


WITHOUT HORIZONTALS

WIDTH IN METERS

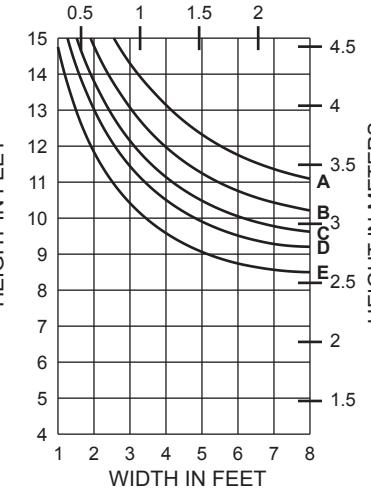

WITHOUT HORIZONTALS

WIDTH IN METERS

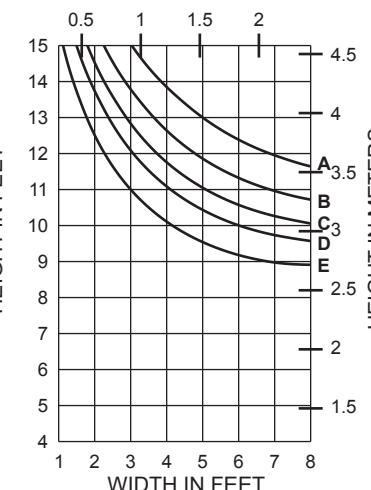


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

WITH HORIZONTALS


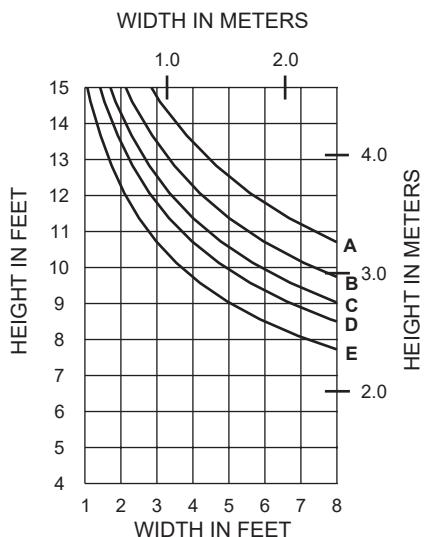


	Allowable Stress Design Load	LRFD Ultimate Design Load
A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)

WITHOUT HORIZONTALS

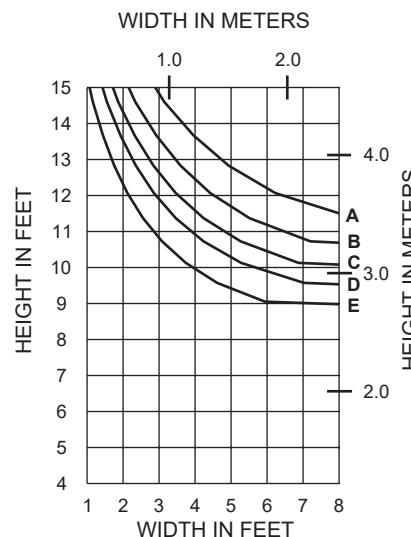



WITH HORIZONTALS

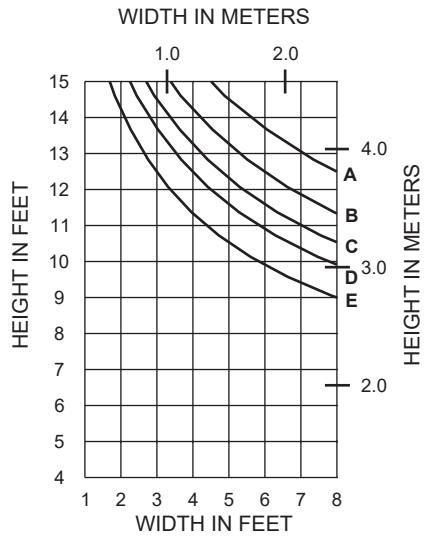

451CG081 / 451CG082

 $I = 4.829 (201.00 \times 10^4)$
 $S = 2.146 (35.17 \times 10^3)$

WITHOUT HORIZONTALS

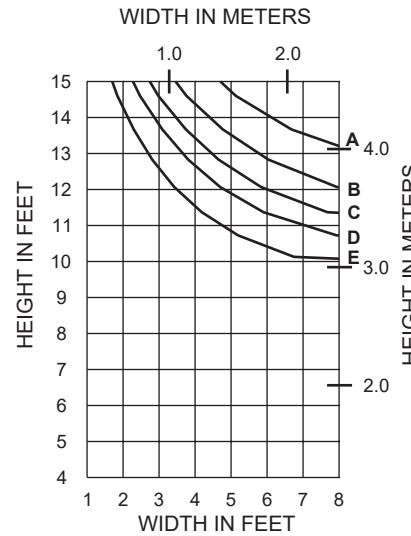451CG081 / 451CG082
with 400110 STEEL

WIND LOAD CHARTS ARE BASED ON
COMPOSITE PROPERTIES WHICH ARE
CALCULATED IN ACCORDANCE WITH
AAMA TIR-A8 AND AAMA 505


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

WITH HORIZONTALS

WIDTH IN METERS

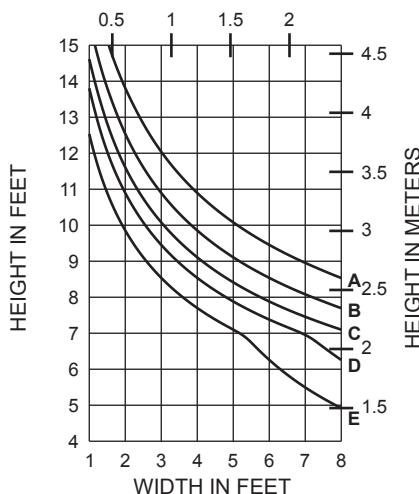



	Allowable Stress Design Load	LRFD Ultimate Design Load
A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)

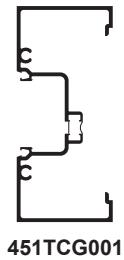

WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS



WIDTH IN METERS

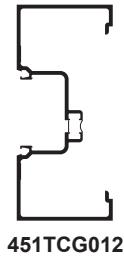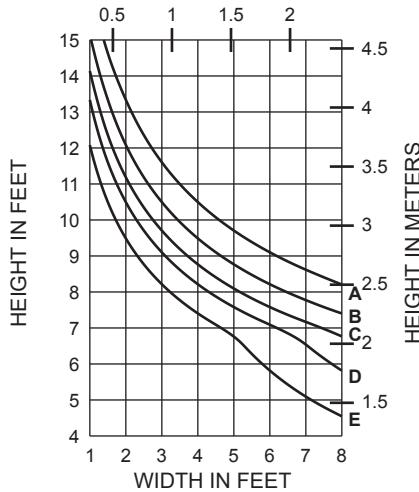

WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS


WIDTH IN METERS

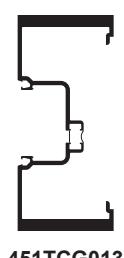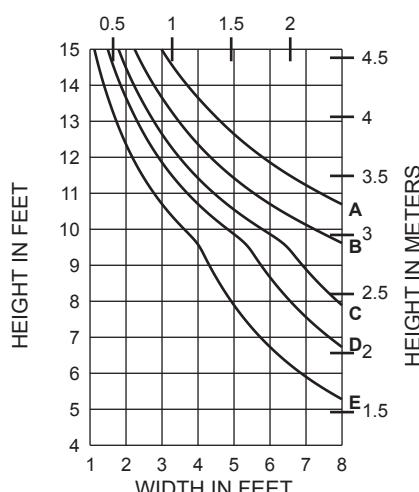

WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505


WITHOUT HORIZONTALS

WIDTH IN METERS

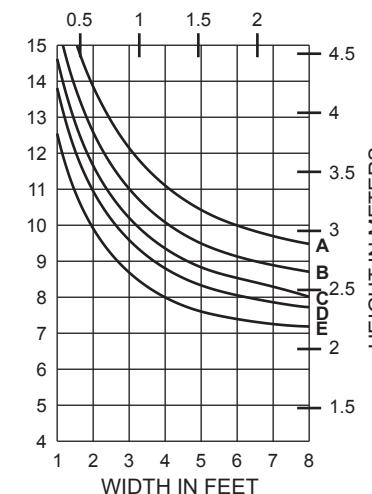


WITHOUT HORIZONTALS

WIDTH IN METERS

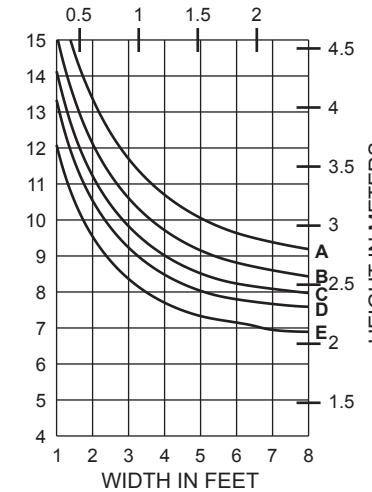

WITHOUT HORIZONTALS

WIDTH IN METERS


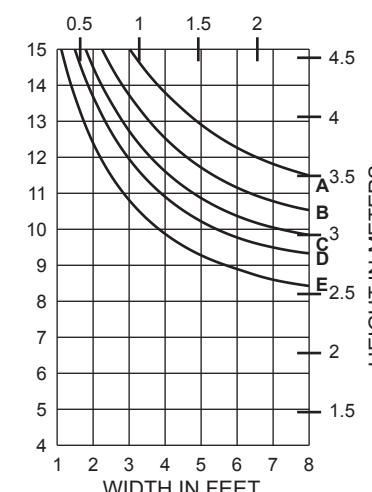


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.



WITH HORIZONTALS

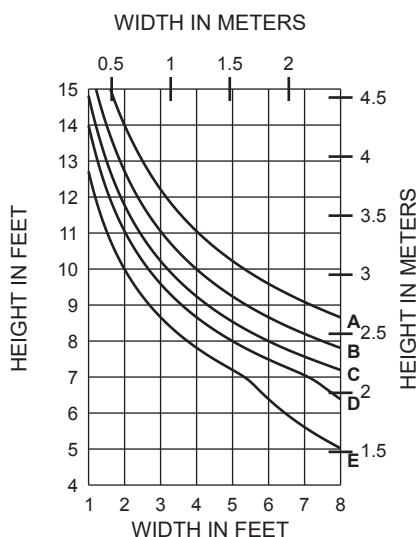

451TCG112



WIND LOAD CHARTS ARE BASED ON
COMPOSITE PROPERTIES WHICH ARE
CALCULATED IN ACCORDANCE WITH
AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS

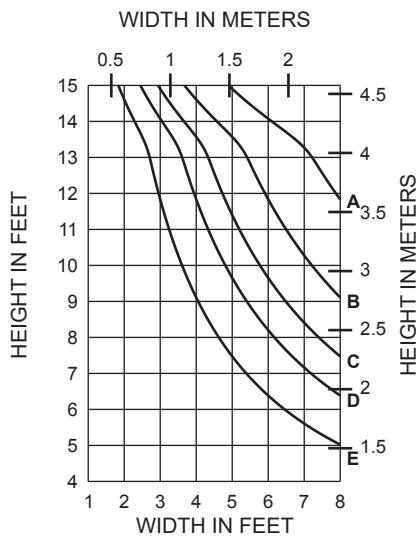451TCG112
with 450110 STEEL

WIND LOAD CHARTS ARE BASED ON
COMPOSITE PROPERTIES WHICH ARE
CALCULATED IN ACCORDANCE WITH
AAMA TIR-A8 AND AAMA 505


WITH HORIZONTALS

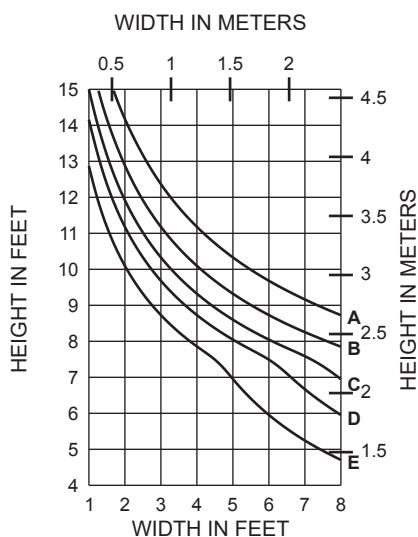


451TCG005

WIND LOAD CHARTS ARE BASED ON
COMPOSITE PROPERTIES WHICH ARE
CALCULATED IN ACCORDANCE WITH
AAMA TIR-A8 AND AAMA 505


WITHOUT HORIZONTALS

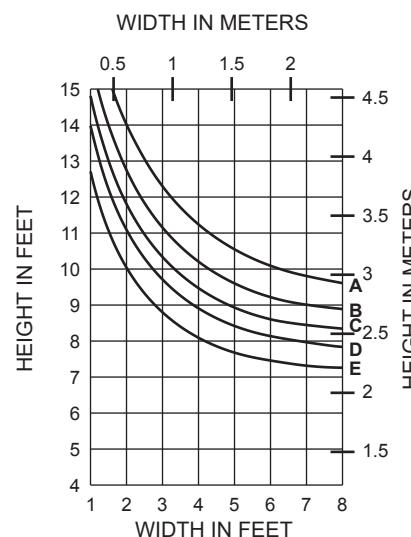

WITHOUT HORIZONTALS

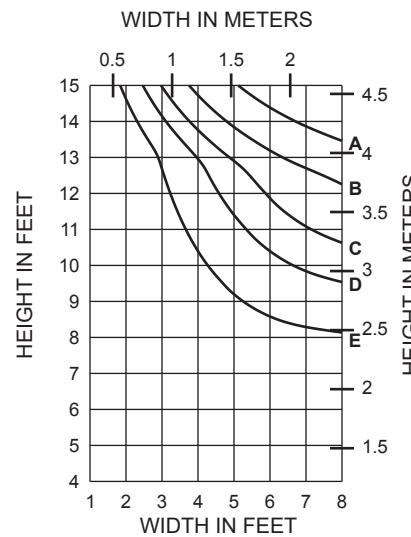


WITHOUT HORIZONTALS

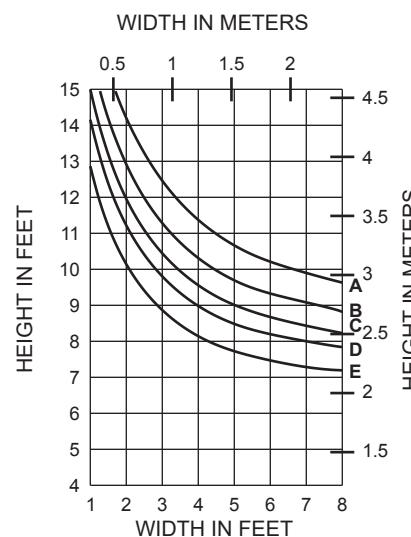

WITH HORIZONTALS

WIDTH IN METERS

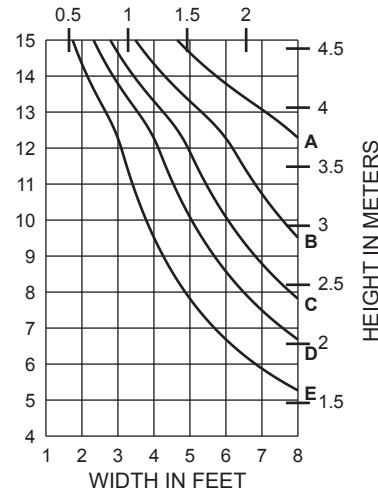


	Allowable Stress Design Load	LRFD Ultimate Design Load
A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)



WIND LOAD CHARTS ARE BASED ON
COMPOSITE PROPERTIES WHICH ARE
CALCULATED IN ACCORDANCE WITH
AAMA TIR-A8 AND AAMA 505

WITHOUT HORIZONTALS

WIDTH IN METERS

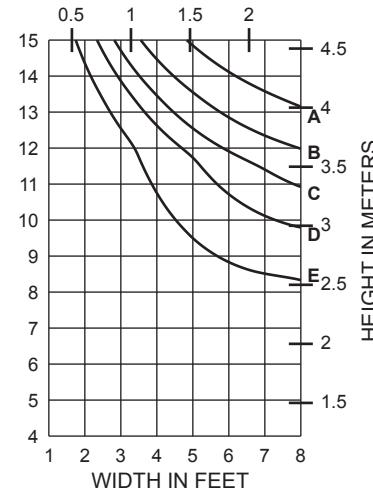


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

WITH HORIZONTALS


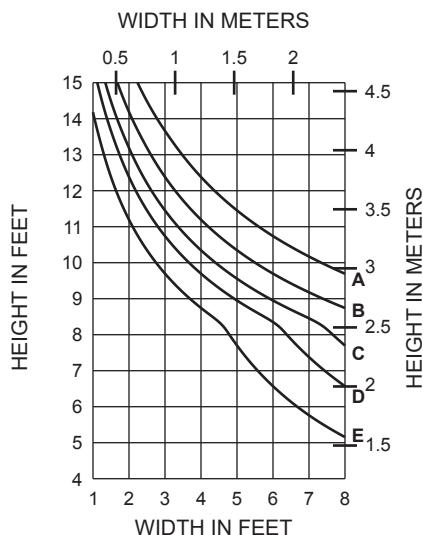


	Allowable Stress Design Load	LRFD Ultimate Design Load
A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)





WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS

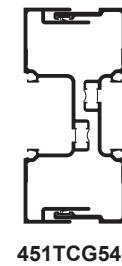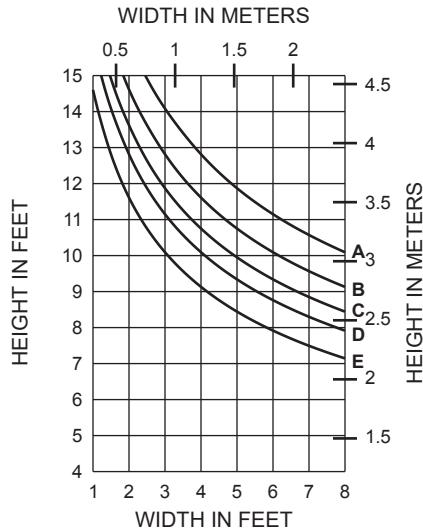


WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS

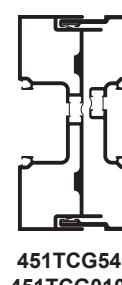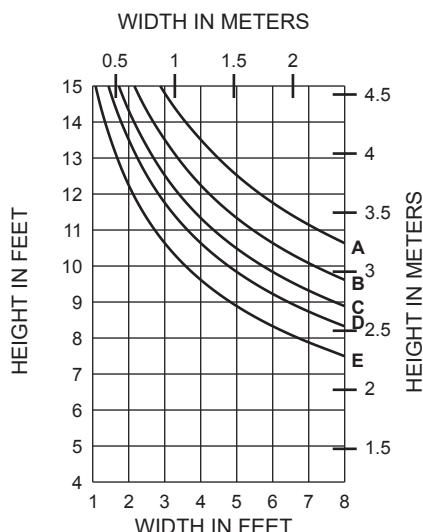


WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505


WITHOUT HORIZONTALS

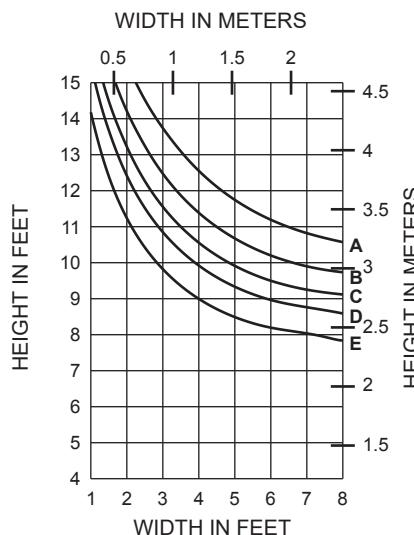

WITHOUT HORIZONTALS

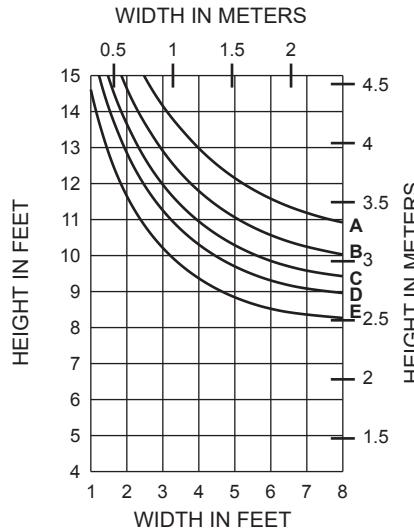

WITHOUT HORIZONTALS

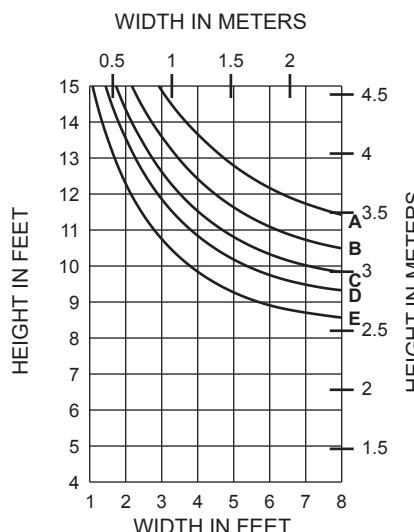


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

WITH HORIZONTALS

WIDTH IN METERS

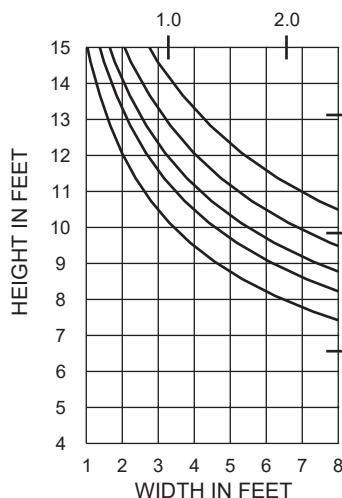

Allowable Stress Design Load		LRFD Ultimate Design Load
A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)




451TCG081 / 451TCG082

WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS


WIDTH IN METERS

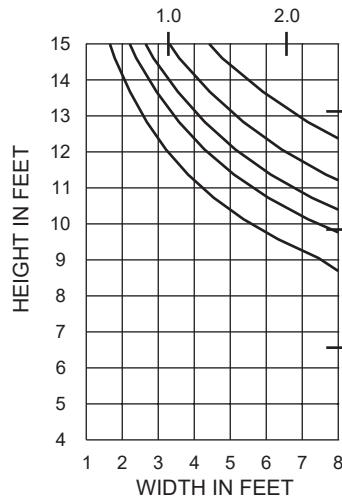

WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505


WITHOUT HORIZONTALS

WIDTH IN METERS

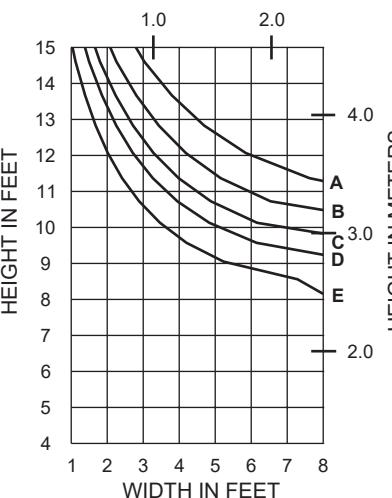

WITHOUT HORIZONTALS

WIDTH IN METERS

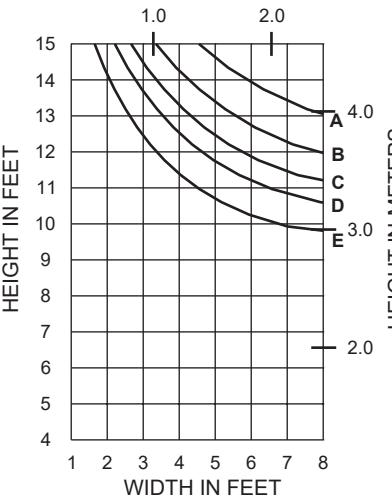


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

WITH HORIZONTALS

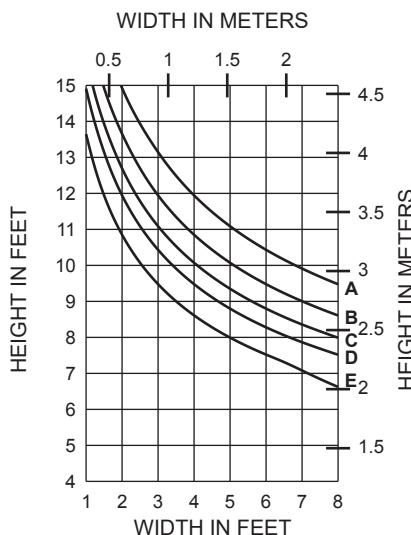


	Allowable Stress Design Load	LRFD Ultimate Design Load
A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)



451VG012
451VG026

$I = 3.346 (139.27 \times 10^4)$
 $S = 1.447 (23.71 \times 10^3)$

WITH HORIZONTALS


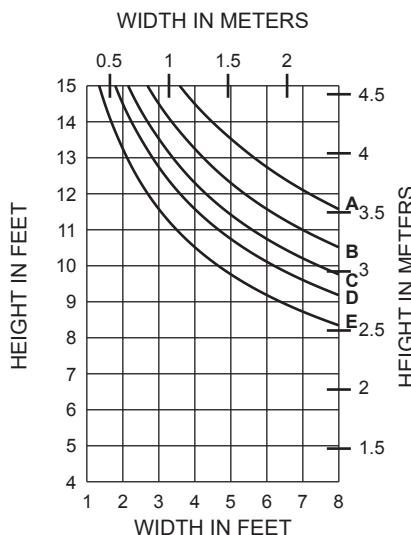


A =	3.346 (139.27 x 10 ⁴)
B =	1.447 (23.71 x 10 ³)
C =	0.949 (39.50 x 10 ⁴)
D =	0.844 (13.83 x 10 ³)
E =	

451VG012
451VG026

with 1" x 2-1/4" STEEL BAR


WITH HORIZONTALS

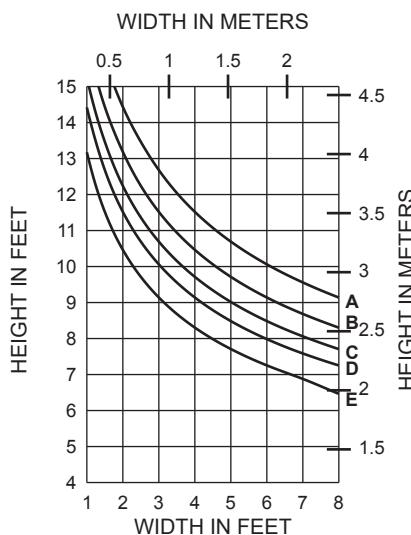


451VG005

$I = 3.001 (124.91 \times 10^4)$
 $S = 1.323 (21.68 \times 10^3)$


WITHOUT HORIZONTALS

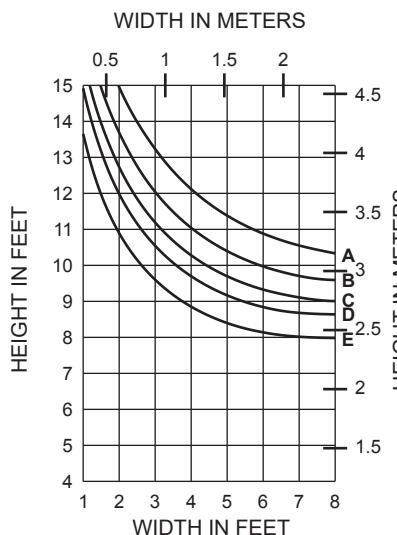

WITHOUT HORIZONTALS

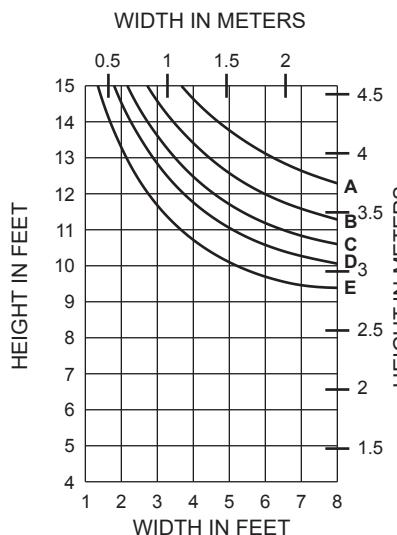

WITHOUT HORIZONTALS

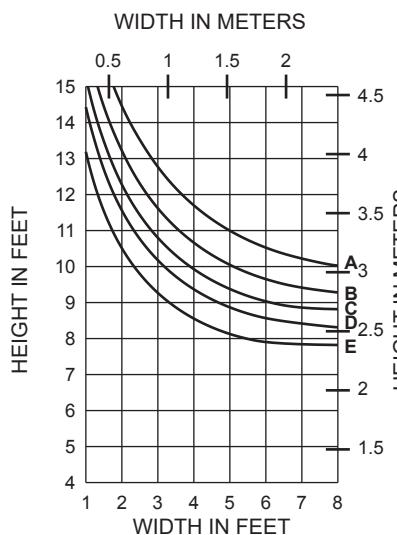



Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

WITH HORIZONTALS

WIDTH IN METERS

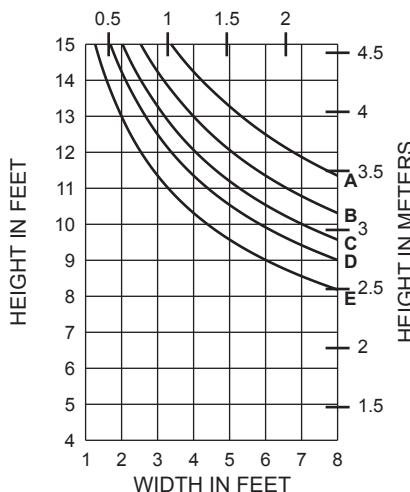

451VG005

with 1" x 2-1/4" STEEL BAR

$$I_A = 3.001 (124.91 \times 10^4)$$


$$S_A = 1.323 (21.68 \times 10^3)$$

$$I_s = 0.949 (39.50 \times 10^4)$$

$$S_s = 0.844 (13.83 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS

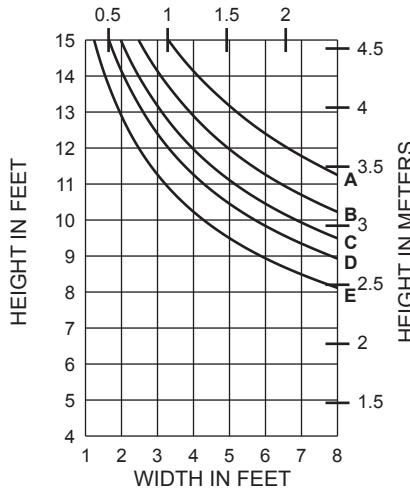



451VG014

$$I = 5.604 (233.25 \times 10^4)$$

$$S = 2.397 (39.28 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS

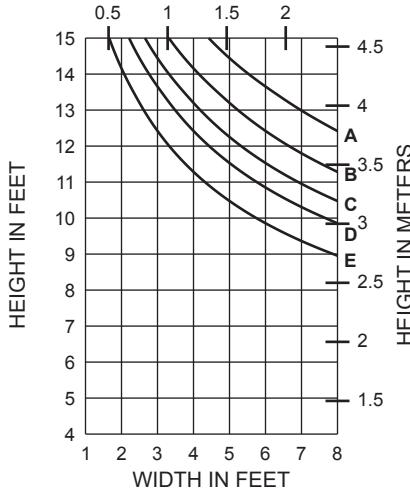

451VG014

with 1" x 2" STEEL BAR

$$I = 5.604 (233.25 \times 10^4)$$


$$S = 2.397 (39.28 \times 10^3)$$

$$I_s = 0.667 (27.26 \times 10^4)$$

$$S_s = 0.667 (10.93 \times 10^3)$$


WITHOUT HORIZONTALS

WIDTH IN METERS

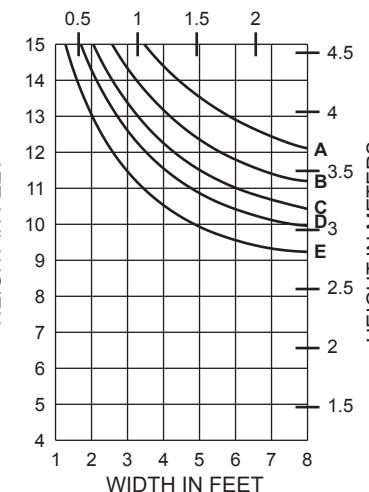


WITHOUT HORIZONTALS

WIDTH IN METERS

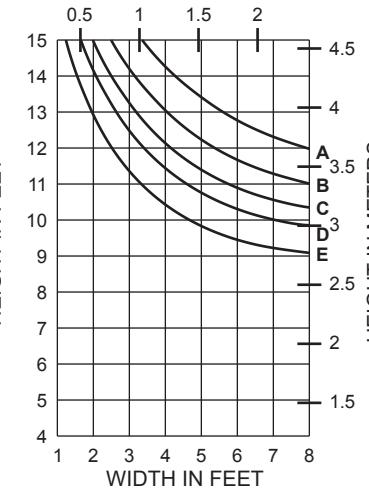

WITHOUT HORIZONTALS

WIDTH IN METERS

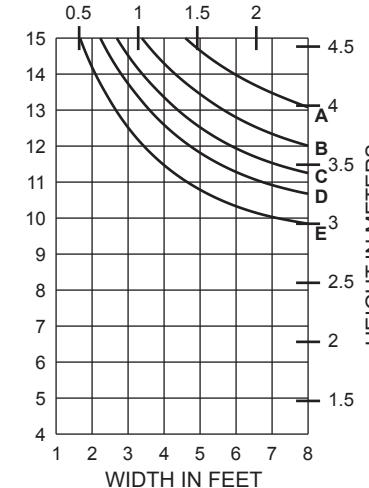


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

WITH HORIZONTALS

WIDTH IN METERS

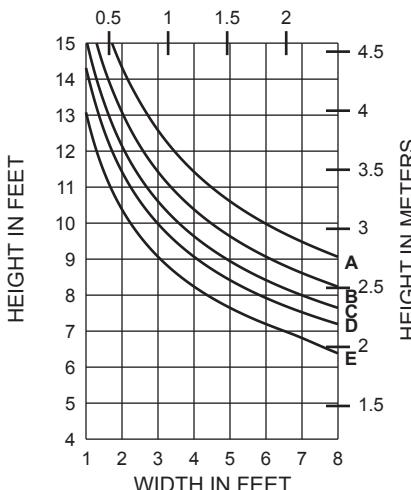

	Allowable Stress Design Load	LRFD Ultimate Design Load
A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)




451VG134

$$I = 2.930 (121.96 \times 10^4)$$

$$S = 1.290 (21.13 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS

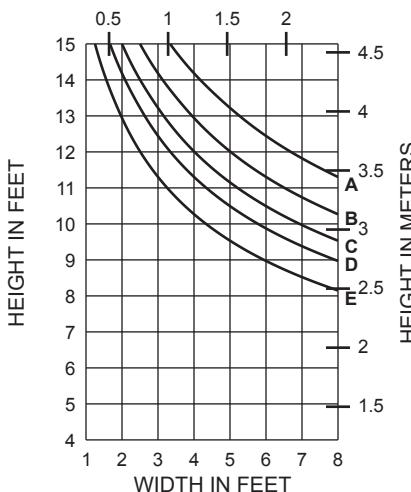


with 1" x 2-1/4" STEEL BAR

$$I_A = 2.930 (121.96 \times 10^4)$$

$$S_A = 1.290 (21.13 \times 10^3)$$

$$I_S = 0.949 (39.50 \times 10^4)$$


$$S_S = 0.844 (13.83 \times 10^3)$$



451VG134

WITH HORIZONTALS

WIDTH IN METERS

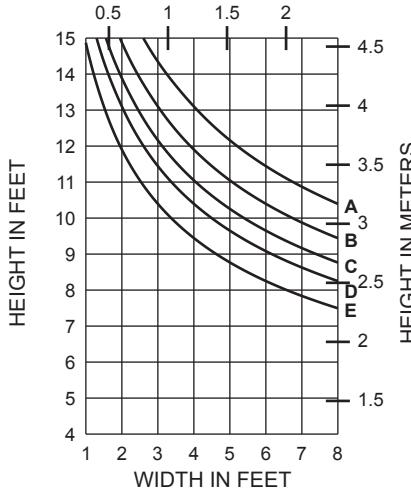
451VG010
451VG540

$$I = 4.418 (183.89 \times 10^4)$$

$$S = 1.798 (29.46 \times 10^3)$$


WITHOUT HORIZONTALS

WIDTH IN METERS

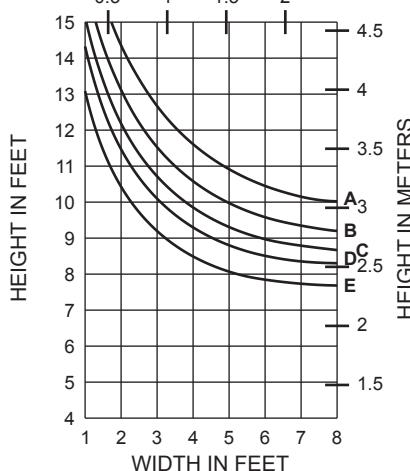


WITHOUT HORIZONTALS

WIDTH IN METERS


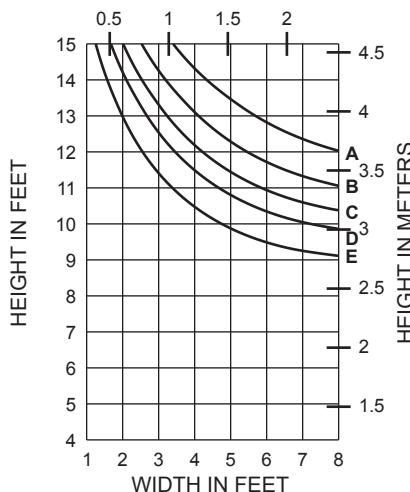


WITHOUT HORIZONTALS

WIDTH IN METERS

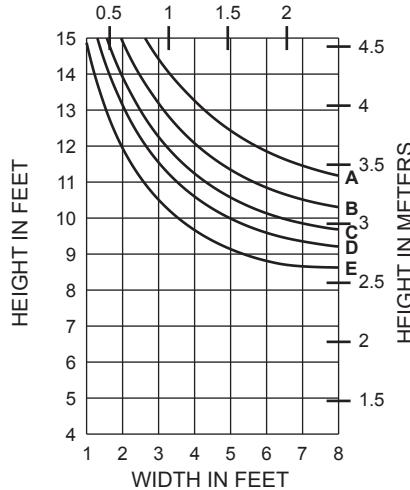


WITH HORIZONTALS

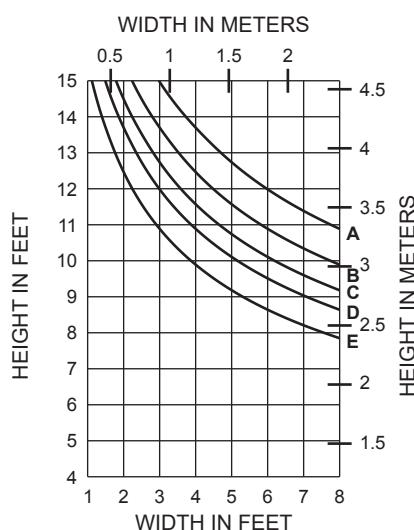

$$I = 5.076 (211.27 \times 10^4)$$

$$S = 2.066 (33.86 \times 10^3)$$

WITHOUT HORIZONTALS

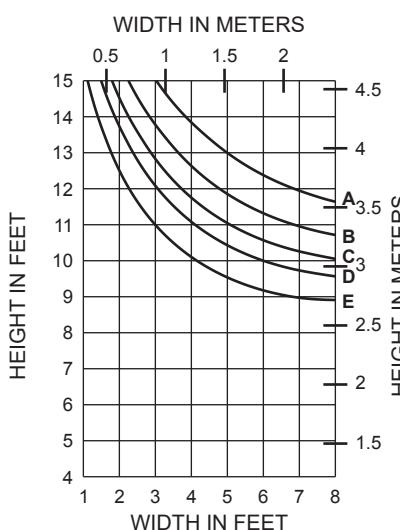


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

WITH HORIZONTALS


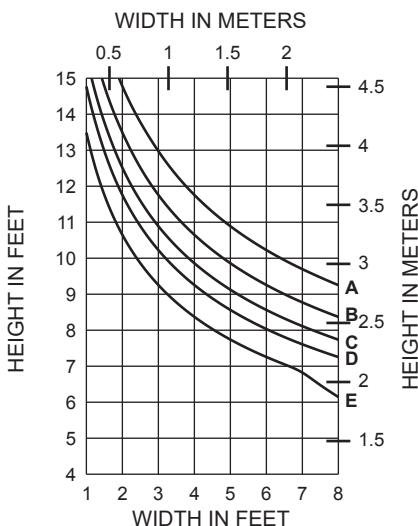


	Allowable Stress Design Load	LRFD Ultimate Design Load
A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)

451TVG012
451VG026



WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS

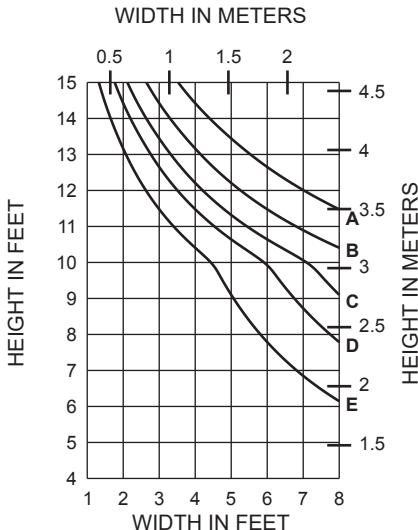451TVG012
451VG026
with 1" x 2-1/4" STEEL BAR

WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505


WITH HORIZONTALS

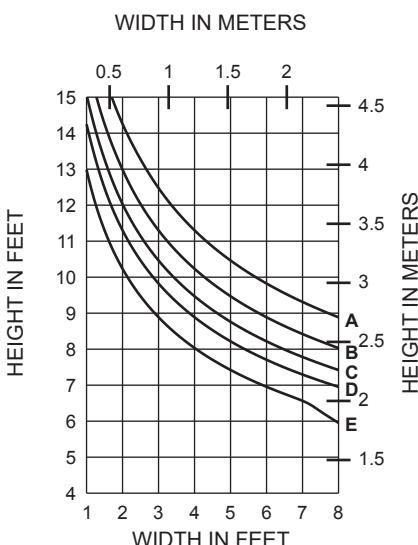


451TVG005

WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505


WITHOUT HORIZONTALS

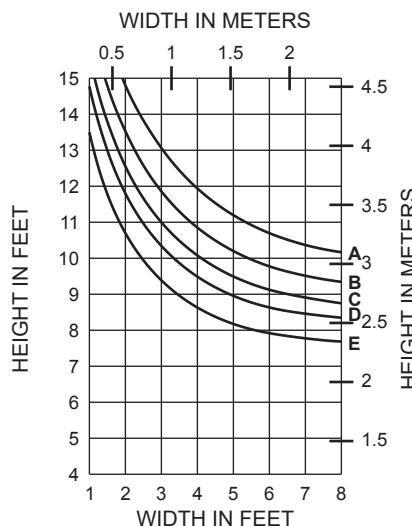


WITHOUT HORIZONTALS

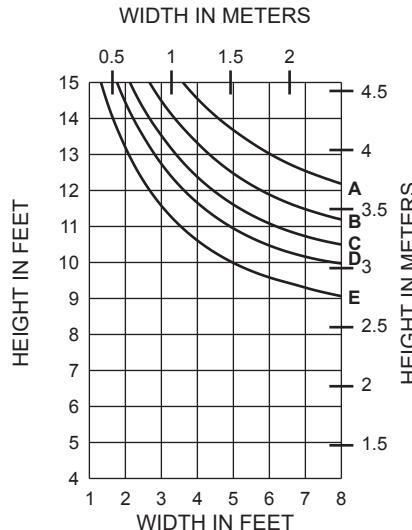

WITHOUT HORIZONTALS

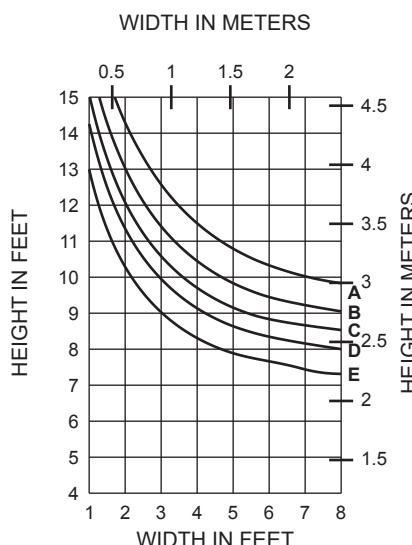

WITH HORIZONTALS


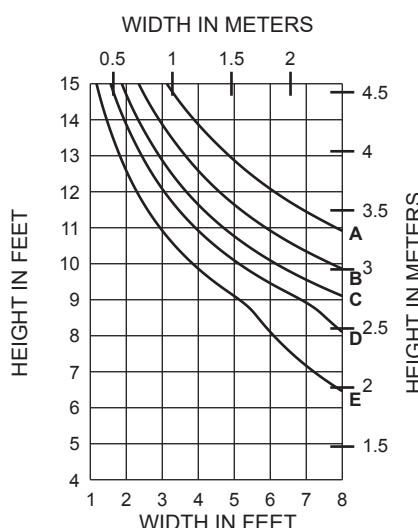


	Allowable Stress Design Load	LRFD Ultimate Design Load
A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)





WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS

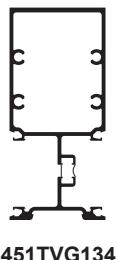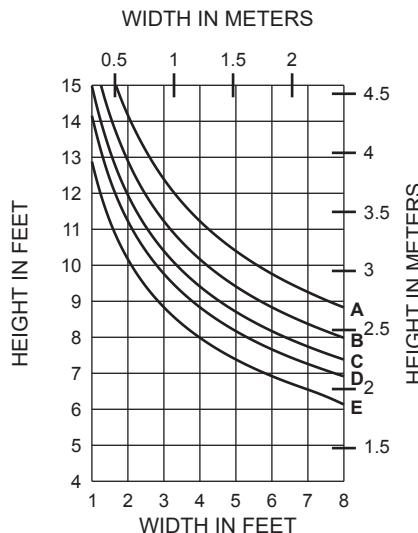


WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS

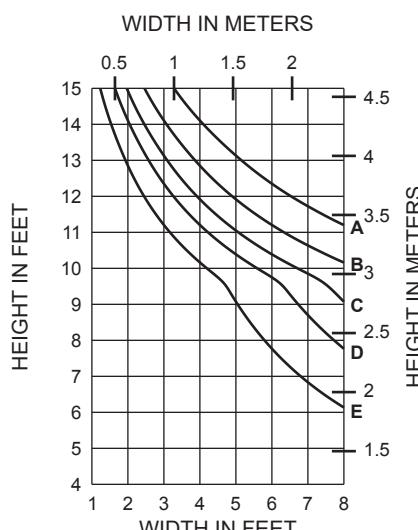


WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505


WITHOUT HORIZONTALS

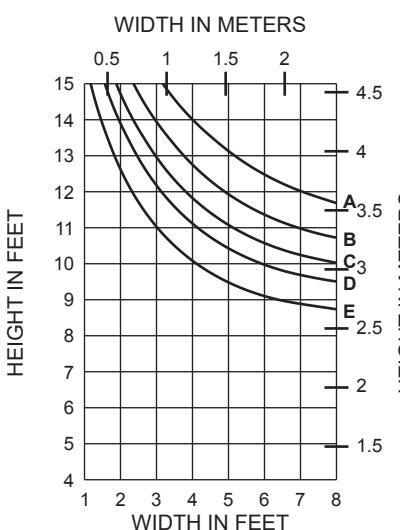

WITHOUT HORIZONTALS

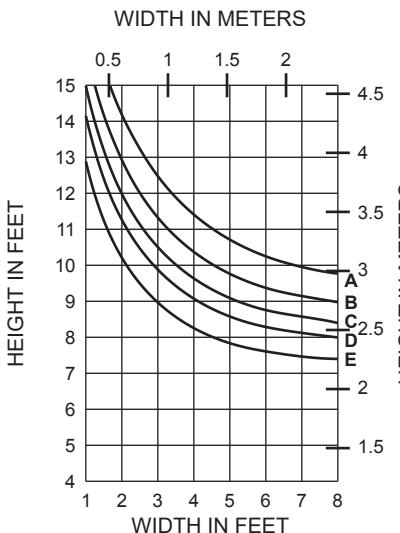

WITHOUT HORIZONTALS


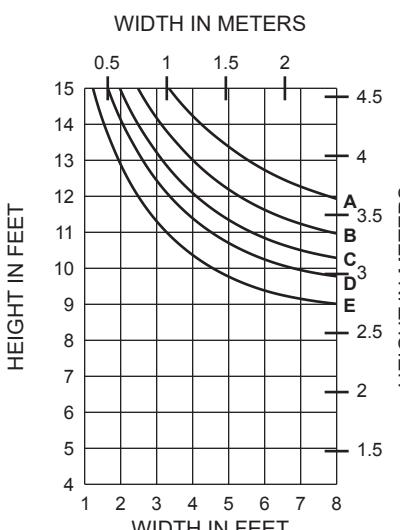


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.



© 2018, Kawneer Company, Inc.

WITH HORIZONTALS

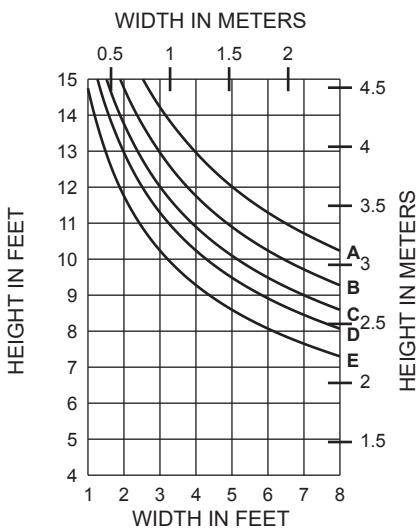451TVG540
451TVG010


WIND LOAD CHARTS ARE BASED ON
COMPOSITE PROPERTIES WHICH ARE
CALCULATED IN ACCORDANCE WITH
AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS

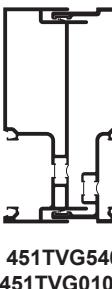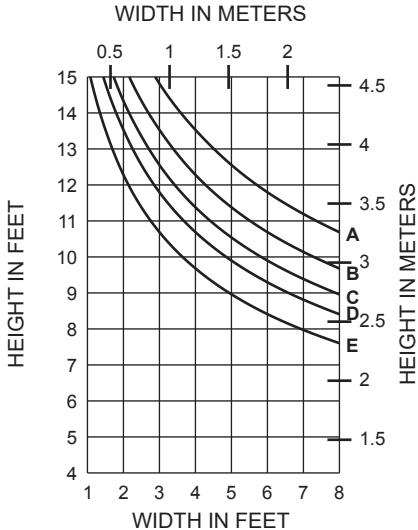451TVG540
451TVG010A


WIND LOAD CHARTS ARE BASED ON
COMPOSITE PROPERTIES WHICH ARE
CALCULATED IN ACCORDANCE WITH
AAMA TIR-A8 AND AAMA 505

WITHOUT HORIZONTALS

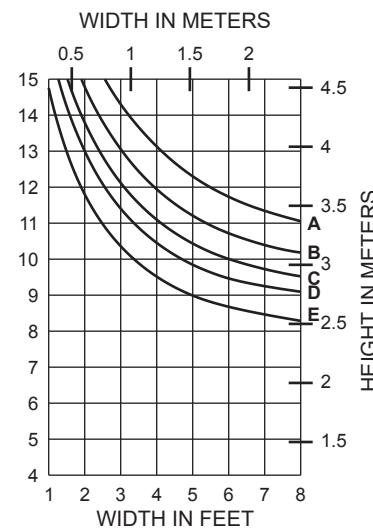

HEIGHT IN FEET

WITHOUT HORIZONTALS

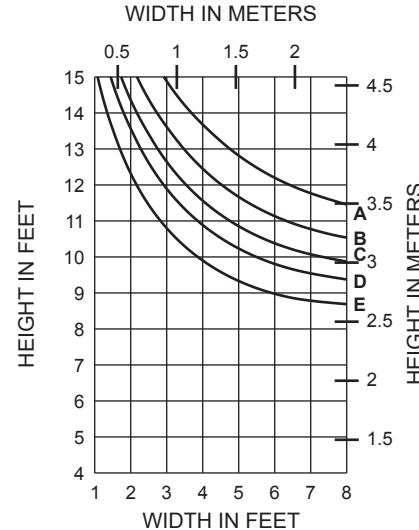

HEIGHT IN FEET



Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

WITH HORIZONTALS

WIDTH IN METERS

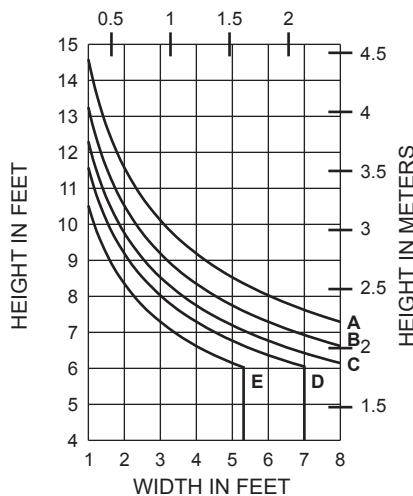



451SSG005

$$I = 1.527 (63.55 \times 10^4)$$

$$S = 1.057 (17.32 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS

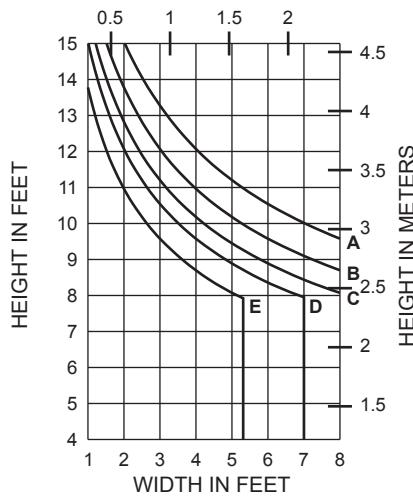451SSG005
with 1" x 2" STEEL BAR

$$I_A = 1.527 (63.55 \times 10^4)$$


$$S_A = 1.057 (17.32 \times 10^3)$$

$$I_S = 0.667 (27.76 \times 10^4)$$

$$S_S = 0.667 (10.93 \times 10^3)$$


WITHOUT HORIZONTALS

WIDTH IN METERS

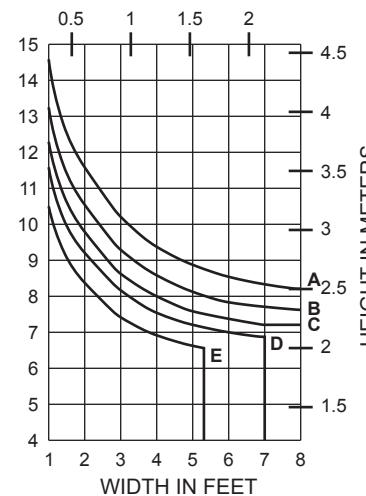

WITHOUT HORIZONTALS

WIDTH IN METERS

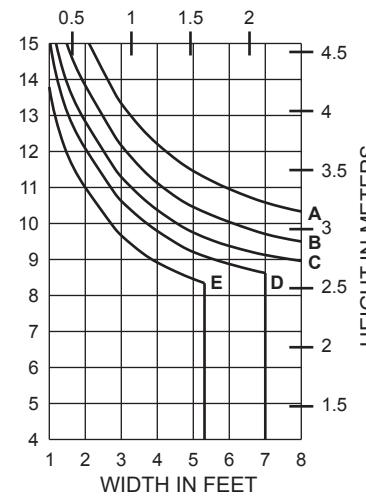


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

WIND LOAD CHARTS (MULTI-PLANE) Non-Thermal

WITH HORIZONTALS

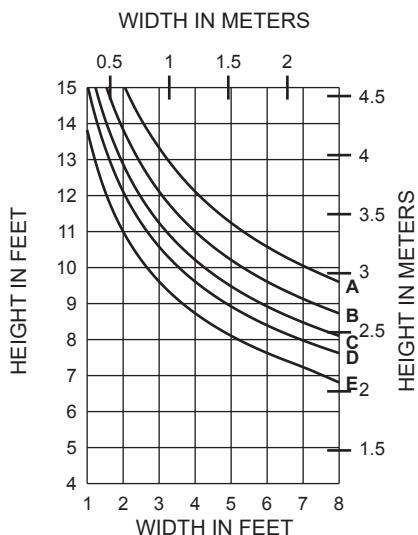



	Allowable Stress Design Load	LRFD Ultimate Design Load
A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)



$$I = 3.485 \ (145.05 \times 10^4)$$

$$S = 1.468 \ (24.06 \times 10^3)$$


WITH HORIZONTALS

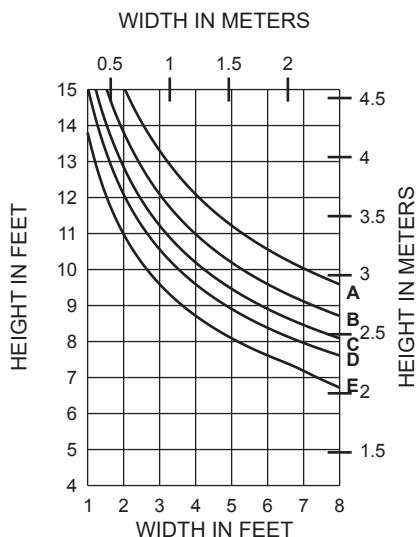

$$I = 3.470 \ (144.43 \times 10^4)$$

$$S = 1.431 \ (23.45 \times 10^3)$$


WITH HORIZONTALS

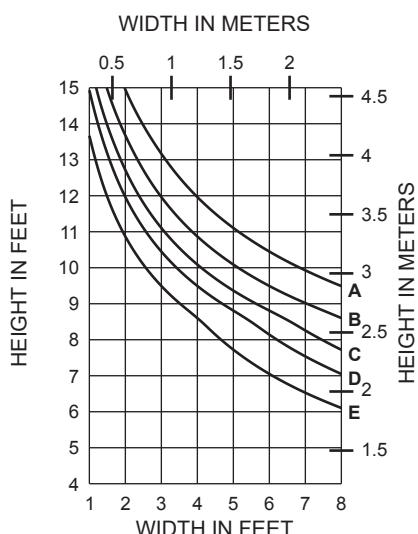


$$I = 3.362 \ (139.94 \times 10^4)$$

$$S = 1.181 \ (19.35 \times 10^3)$$


WITHOUT HORIZONTALS

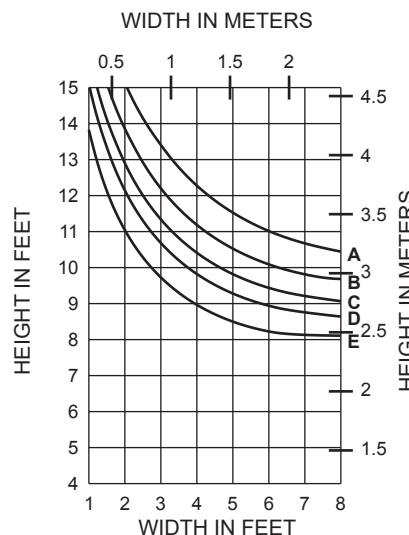

WITHOUT HORIZONTALS

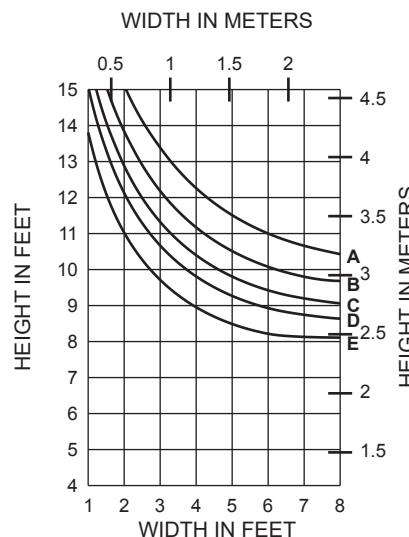

WITHOUT HORIZONTALS

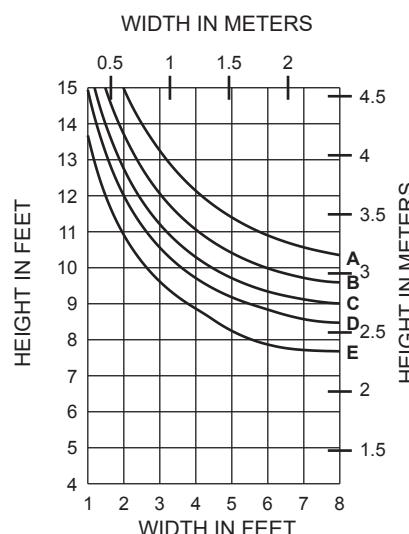


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

WITH HORIZONTALS


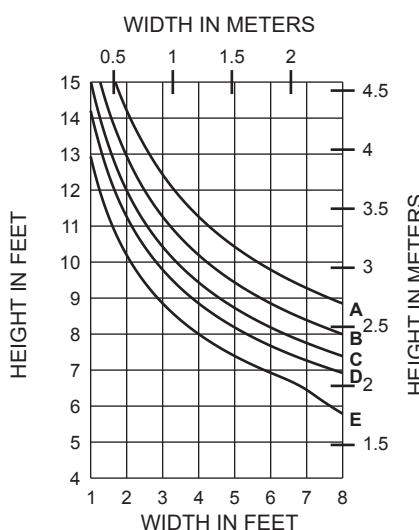


	Allowable Stress Design Load	LRFD Ultimate Design Load
A =	15 PSF (720)	25 PSF (1200)
B =	20 PSF (960)	33 PSF (1580)
C =	25 PSF (1200)	42 PSF (2000)
D =	30 PSF (1440)	50 PSF (2400)
E =	40 PSF (1920)	67 PSF (3200)

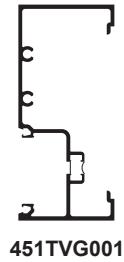



WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS

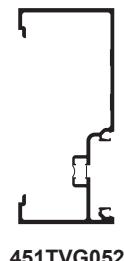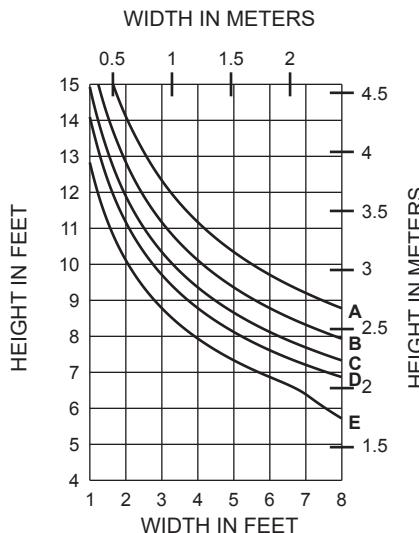


WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505

WITH HORIZONTALS

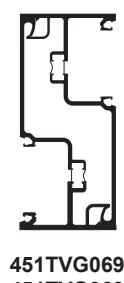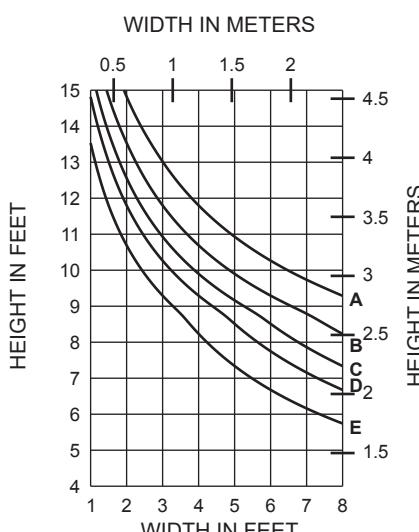


WIND LOAD CHARTS ARE BASED ON COMPOSITE PROPERTIES WHICH ARE CALCULATED IN ACCORDANCE WITH AAMA TIR-A8 AND AAMA 505


WITHOUT HORIZONTALS

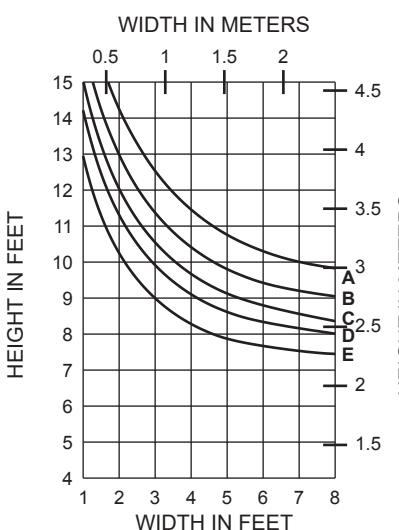

WITHOUT HORIZONTALS

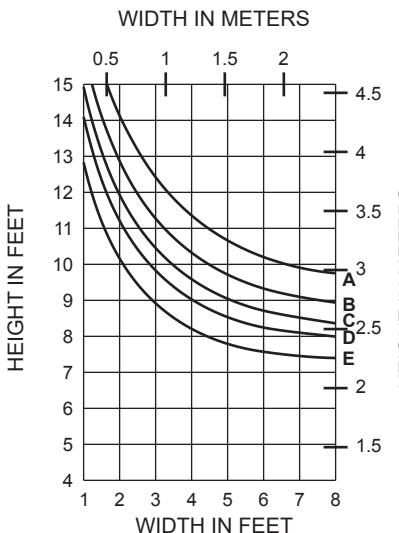

WITHOUT HORIZONTALS

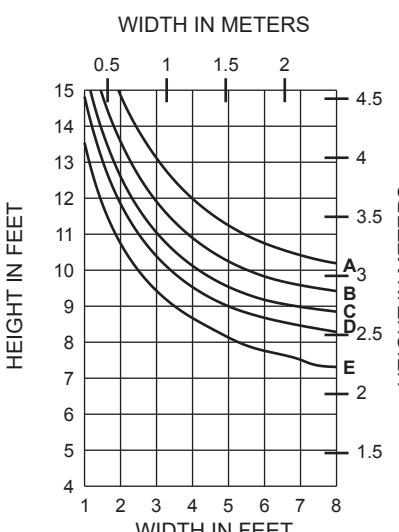


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

WITH HORIZONTALS

WIDTH IN METERS

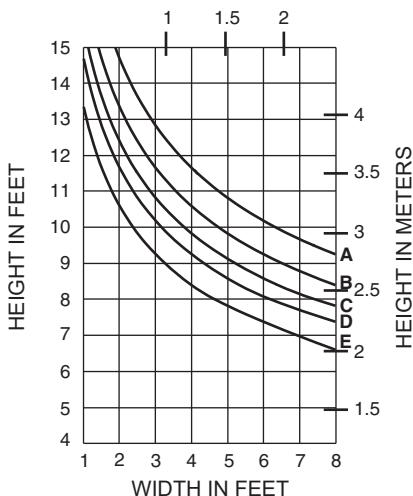Allowable Stress
Design Load



A =	15 PSF (720)
B =	20 PSF (960)
C =	25 PSF (1200)
D =	30 PSF (1440)
E =	40 PSF (1920)

LRFD Ultimate
Design Load

25 PSF (1200)
33 PSF (1580)
42 PSF (2000)
50 PSF (2400)
67 PSF (3200)

WITHOUT HORIZONTALS



WIDTH IN METERS

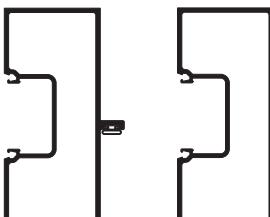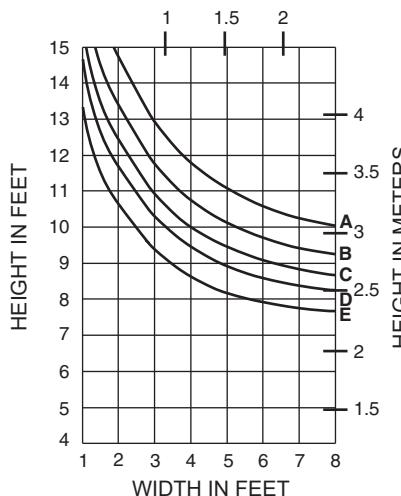

451501 **451019**
 $I = 3.116 (129.7 \times 10^4)$
 $S = 1.385 (22.7 \times 10^3)$

WITH HORIZONTALS



WIDTH IN METERS

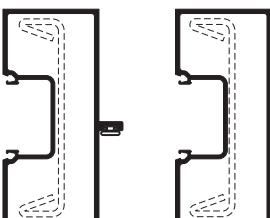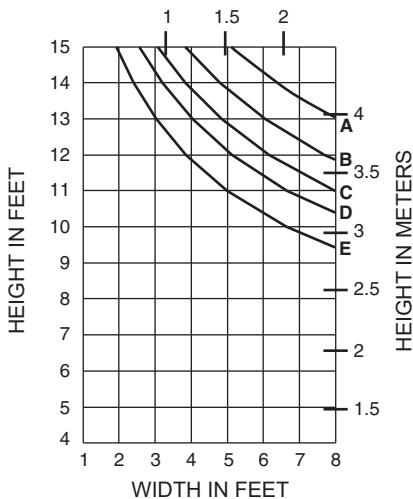

451501 **451019**
with 450110 STEEL
 $I_A = 3.116 (129.70 \times 10^4)$
 $S_A = 1.385 (22.70 \times 10^3)$
 $I_S = 1.935 (80.54 \times 10^4)$
 $S_S = 0.938 (15.37 \times 10^3)$

WITH HORIZONTALS


WIDTH IN METERS

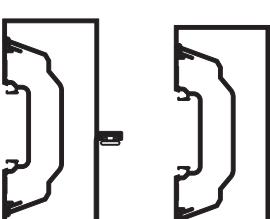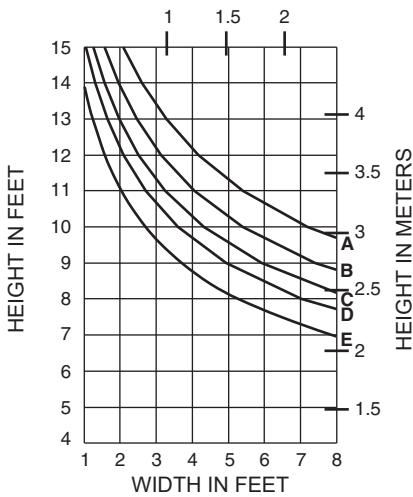

451599 **451064**
451CG002 **451CG002**
 $I = 3.586 (149.26 \times 10^4)$
 $S = 1.594 (26.12 \times 10^3)$


WITHOUT HORIZONTALS

WIDTH IN METERS

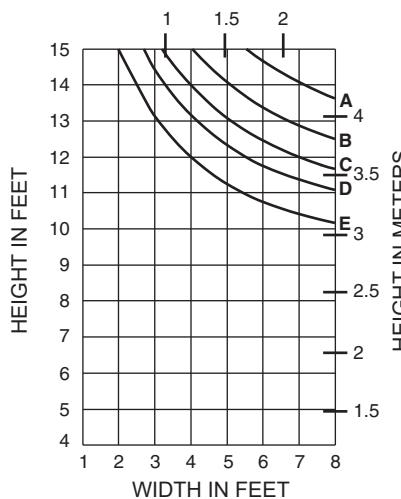

WITHOUT HORIZONTALS

WIDTH IN METERS

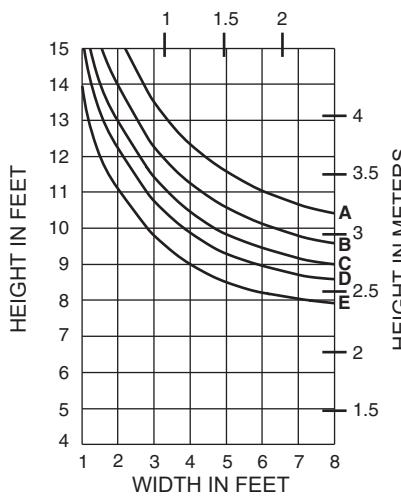



Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

WITH HORIZONTALS

WIDTH IN METERS

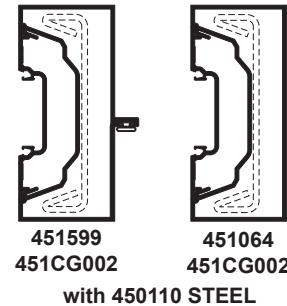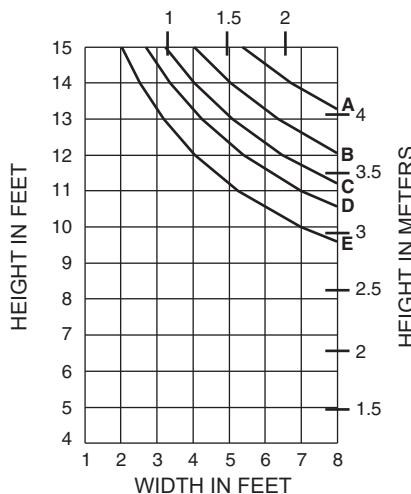

$$I = 3.565 (148.39 \times 10^4)$$


$$S = 1.622 (26.58 \times 10^3)$$

$$I_s = 1.935 (80.54 \times 10^4)$$

$$S_s = 0.938 (15.37 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS


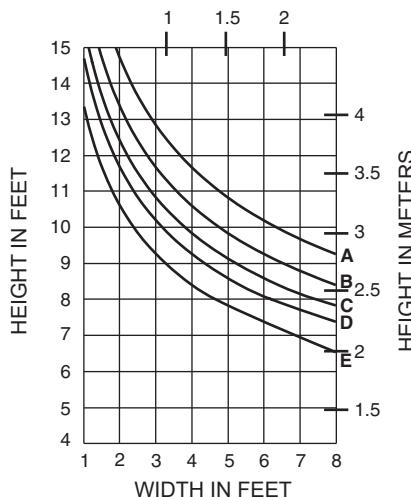


$$I = 3.124 (130.03 \times 10^4)$$

$$S = 1.333 (21.84 \times 10^3)$$

WITH HORIZONTALS

WIDTH IN METERS

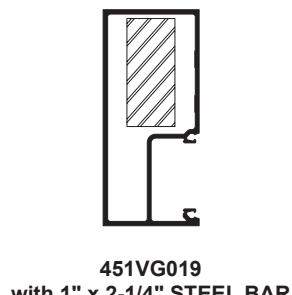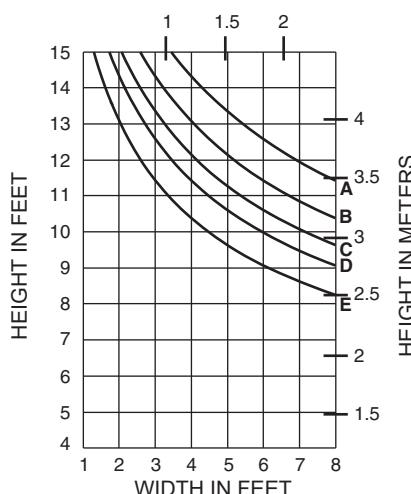

$$I_A = 3.124 (130.03 \times 10^4)$$


$$S_A = 1.333 (21.84 \times 10^3)$$

$$I_s = 0.949 (39.50 \times 10^4)$$

$$S_s = 0.844 (13.83 \times 10^3)$$


WITHOUT HORIZONTALS

WIDTH IN METERS

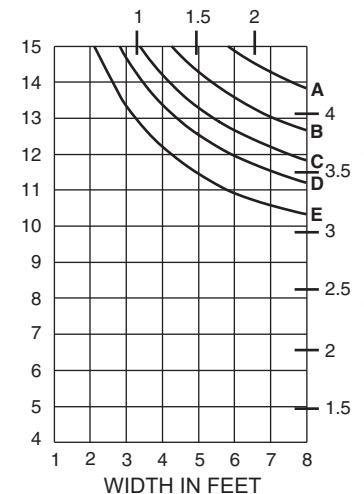


WITHOUT HORIZONTALS

WIDTH IN METERS

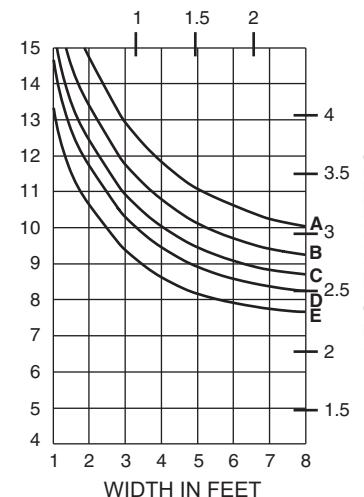

WITHOUT HORIZONTALS

WIDTH IN METERS

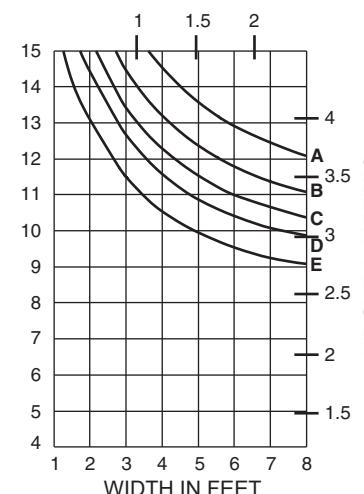

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.







Horizontal or deadload limitations are based upon 1/8" (3.2) maximum allowable deflection at the center of an intermediate horizontal member. The accompanying charts are calculated for 1" (25.4) thick insulating glass supported on two setting blocks at the loading points shown.

NOTE: Charts are for THERMAL and NON-THERMAL members.

A = (1/4 POINT LOADING)



B = (1/6 POINT LOADING)

C = (1/8 POINT LOADING)

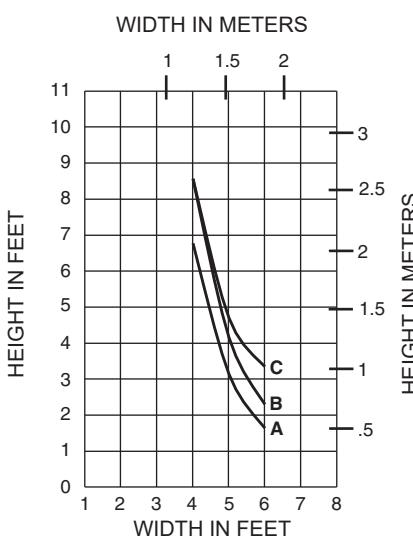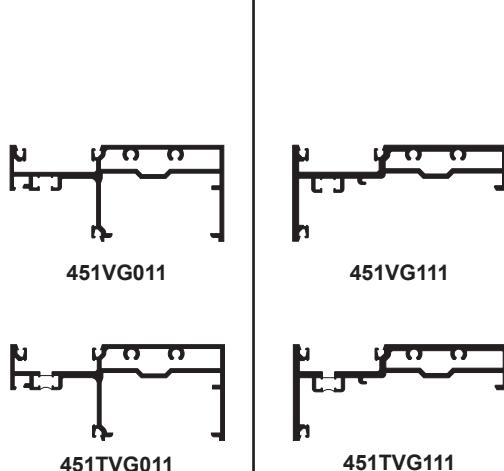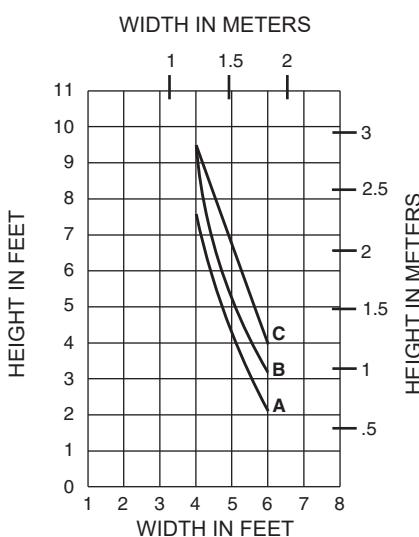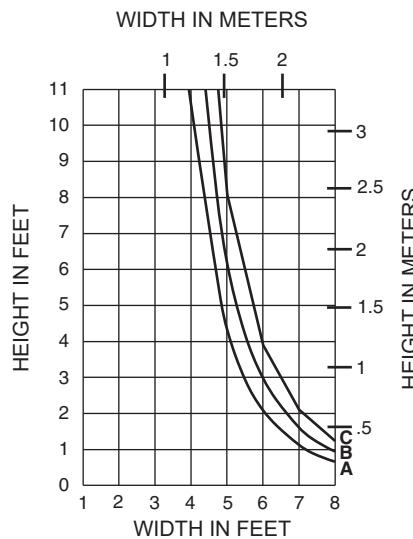
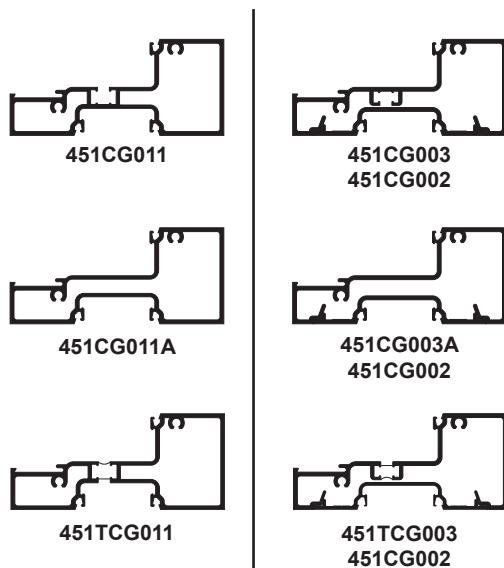
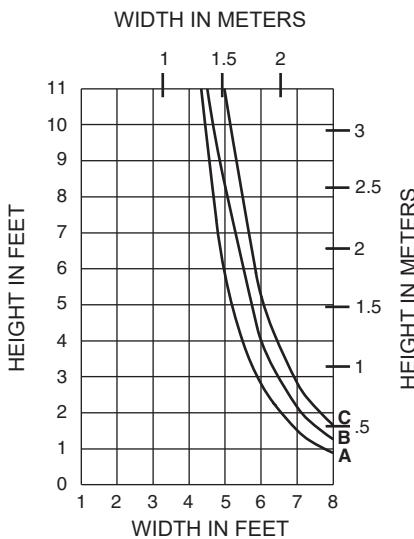


Horizontal or deadload limitations are based upon 1/8" (3.2) maximum allowable deflection at the center of an intermediate horizontal member. The accompanying charts are calculated for 1" (25.4) thick insulating glass supported on two setting blocks at the loading points shown.

NOTE: Charts are for THERMAL and NON-THERMAL members.

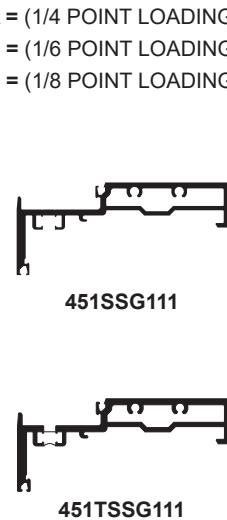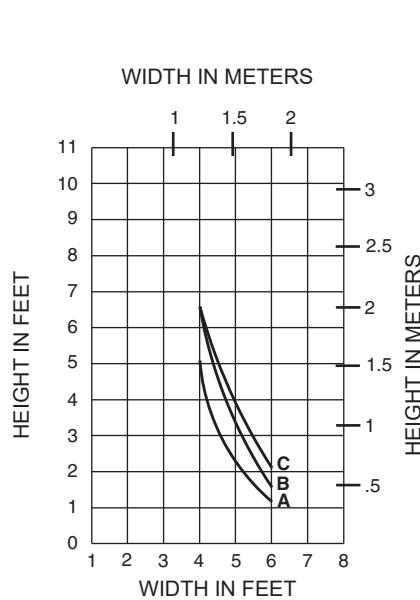

Height limitations for transom glass over a doorway are based upon a 1/16" (1.6) maximum allowable deflection at the center of a transom bar. The accompanying charts are calculated for 1" (25.4) thick insulating glass supported on two setting blocks placed at the loading points shown.

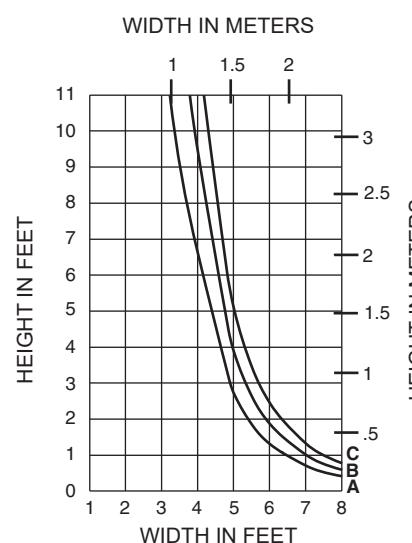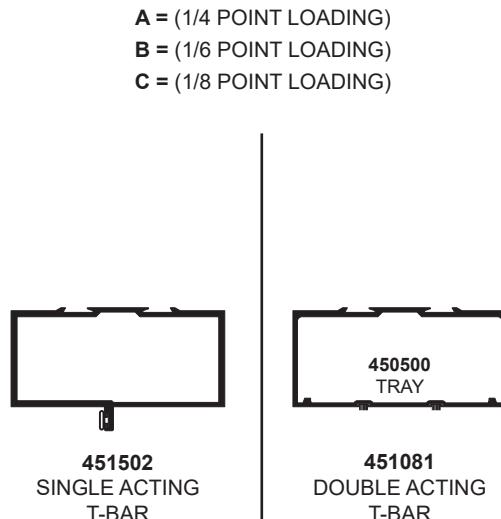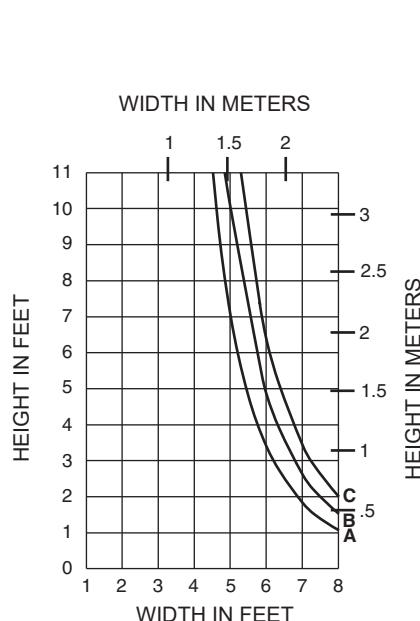

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

For each application, end reactions MUST be checked. These charts are used to verify that the end reactions at the head and sill receptors are 500 lbs. (2224N) or less and will meet the specified wind load.



Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.


© 2018, Kawneer Company, Inc.

A = 15 PSF (720 Pa)
 B = 20 PSF (960 Pa)
 C = 25 PSF (1200 Pa)
 D = 30 PSF (1440 Pa)
 E = 40 PSF (1920 Pa)

WITH HORIZONTALS

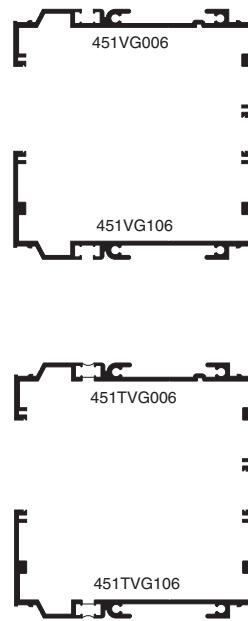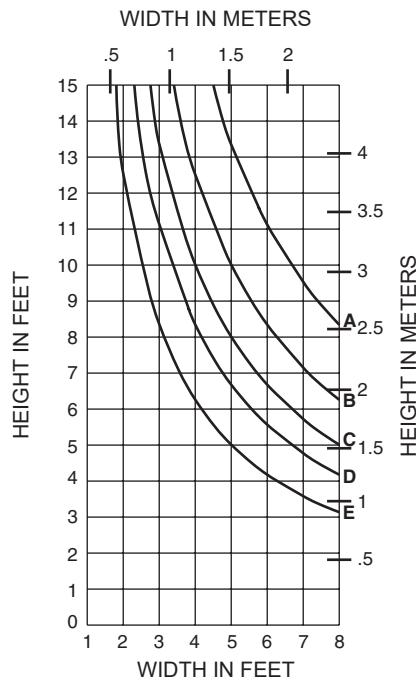


WITHOUT HORIZONTALS

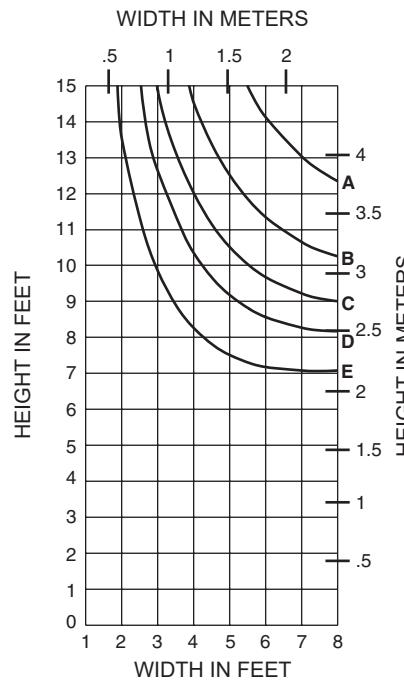

500lbs. Max. End Reaction

Generic Project Specific U-factor Example Calculation
(Percent of Glass will vary on specific products depending on sitelines)

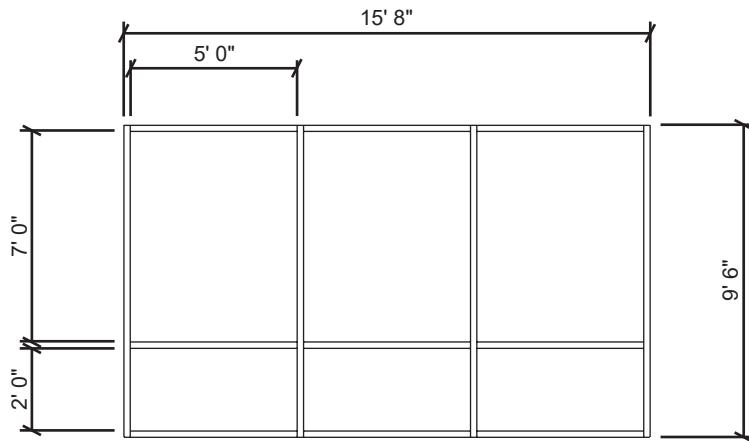


Example Glass U-factor = 0.42 Btu/hr·ft²·°F

$$\text{Total Daylight Opening} = 3(5' \times 7') + 3(5' \times 2') = 135\text{ft}^2$$

$$\begin{aligned} \text{Total Projected Area} &= (\text{Total Daylight Opening} + \text{Total Area of Framing System}) \\ &= 15' 8'' \times 9' 6'' = 148.83\text{ft}^2 \end{aligned}$$

$$\begin{aligned} \text{Percent of Glass} &= (\text{Total Daylight Opening} \div \text{Total Projected Area}) \\ &= (135 \div 148.83)100 = 91\% \end{aligned}$$

System U-factor vs Percent of Glass Area

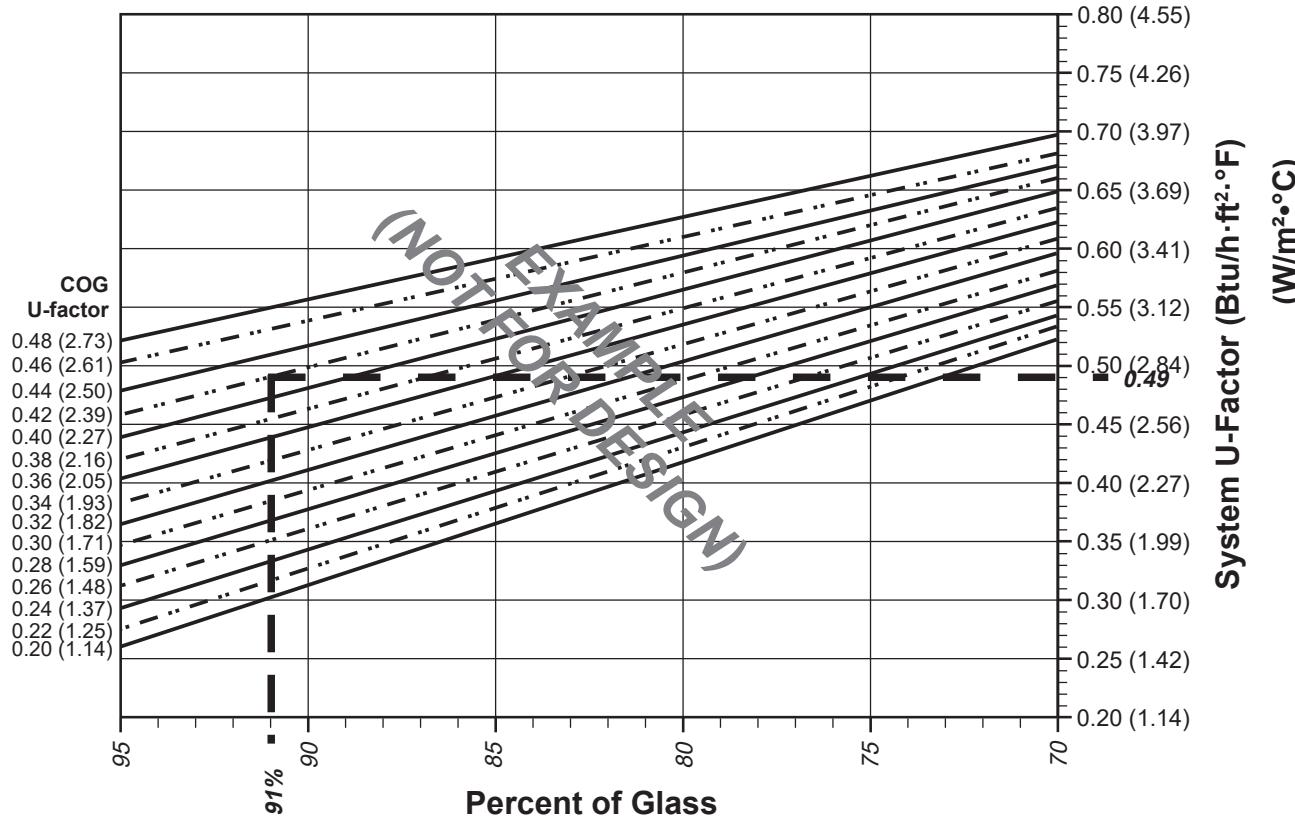

Based on 91% glass and center of glass (COG) U-factor of 0.42
 System U-factor is equal to 0.49 Btu/hr x ft² x °F

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

**Trifab® VersaGlaze® 451 (CENTER – Non-Thermal)
Aluminum Glazing Spacer**

Note:

Values in parentheses are metric.

COG=Center of Glass.


Charts are generated per AAMA 507.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

System U-factor vs Percent of Glass Area

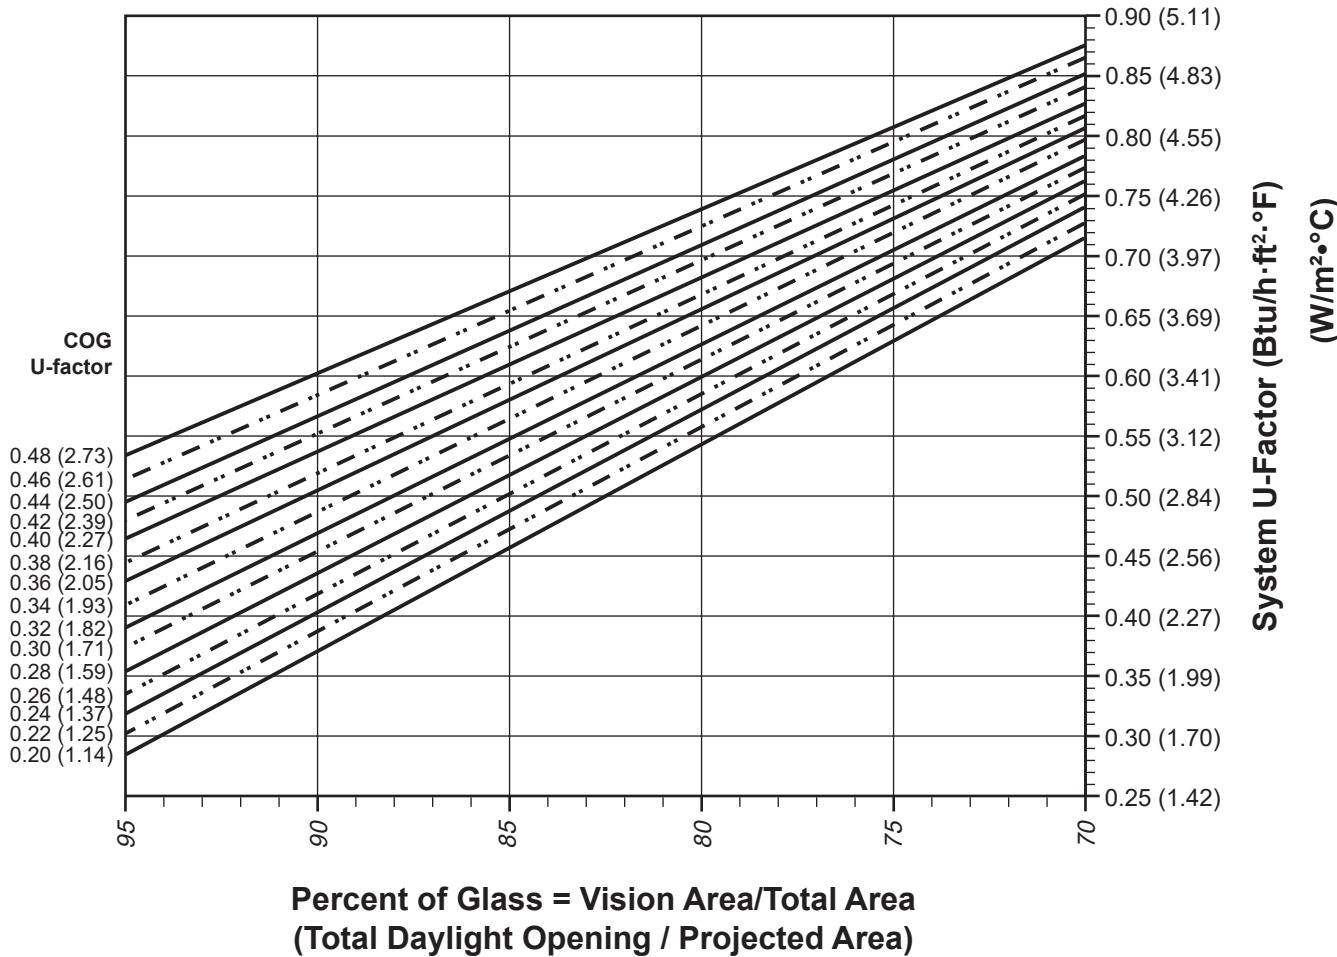

Notes for System U-factor, SHGC, and VT charts:

For glass values not listed, linear interpolation is permitted.


Glass Properties are based on center of glass values and are obtained from your glass supplier.

Trifab® VersaGlaze® 451 (CENTER – Non-Thermal)

Aluminum Glazing Spacer


Charts are generated per AAMA 507.

System Solar Heat Gain Coefficient (SHGC) vs Percent of Vision Area

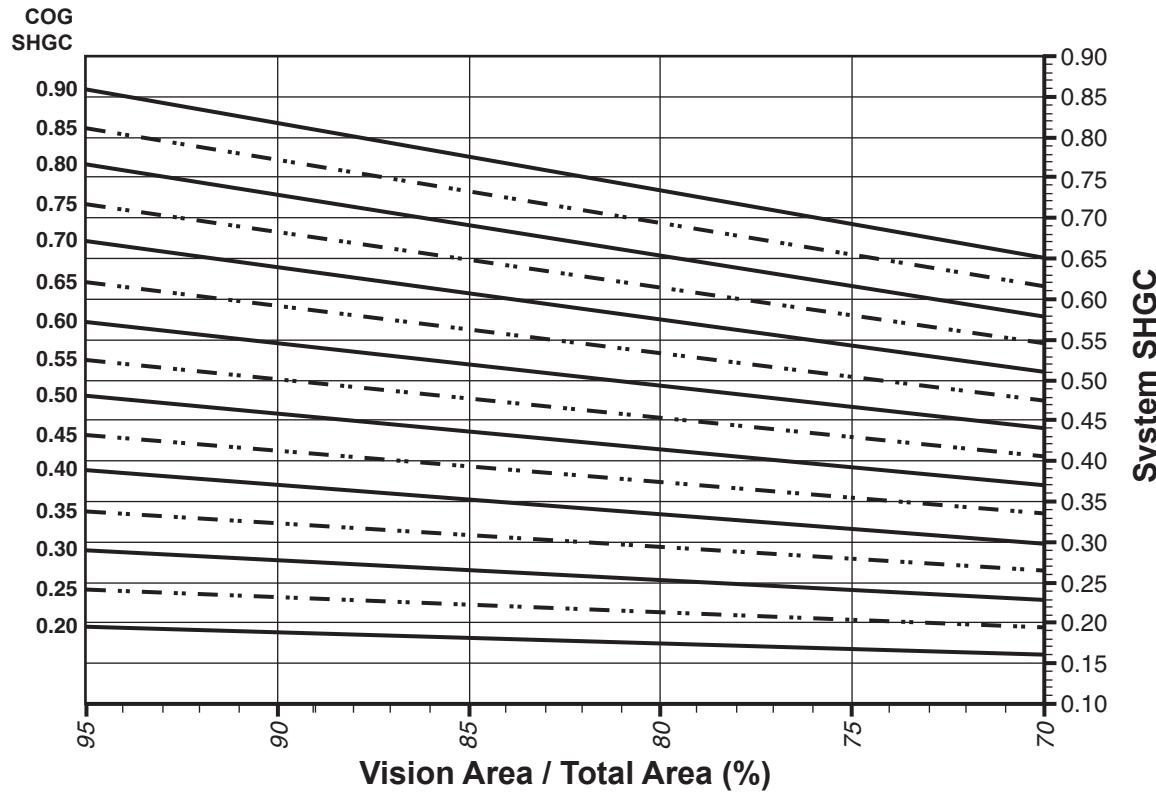

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

System Visible Transmittance (VT) vs Percent of Vision Area

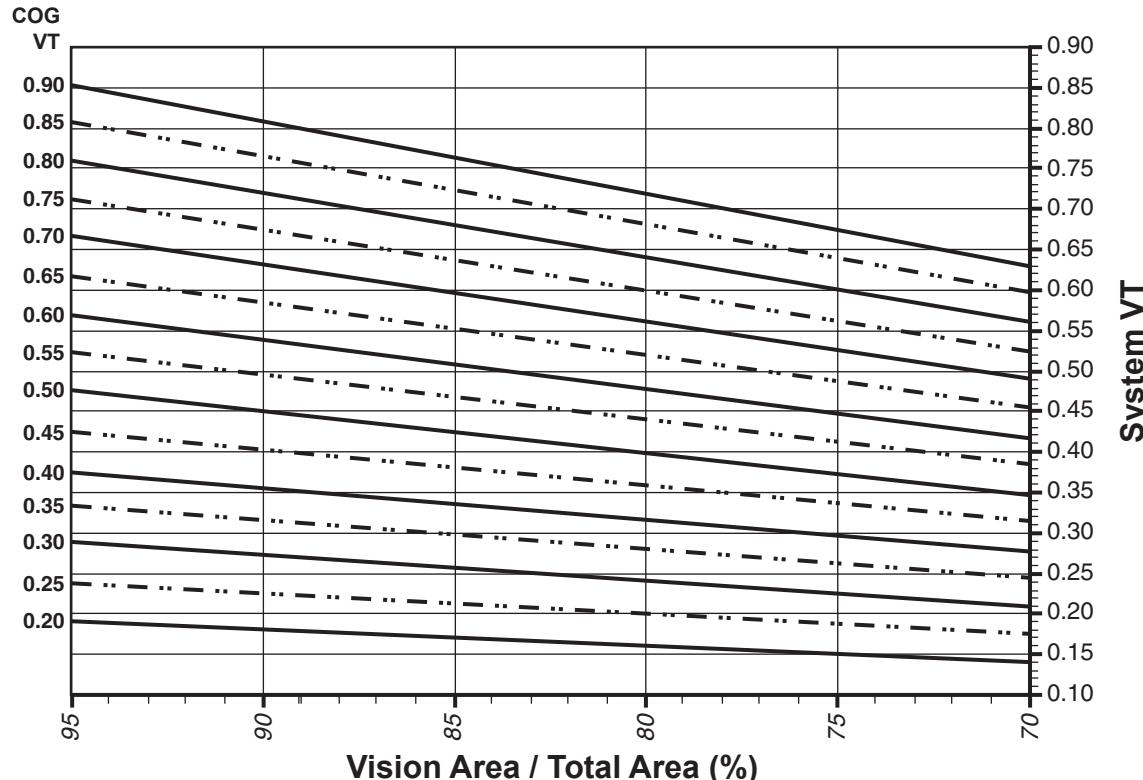

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Thermal Transmittance¹ (BTU/hr • ft² • °F)

Glass U-Factor ³	Overall U-Factor ⁴
0.48	0.63
0.46	0.61
0.44	0.60
0.42	0.58
0.40	0.57
0.38	0.55
0.36	0.53
0.34	0.52
0.32	0.50
0.30	0.49
0.28	0.47
0.26	0.45
0.24	0.44
0.22	0.42
0.20	0.41

Trifab® VersaGlaze® 451
(CENTER – Non-Thermal)
Aluminum Glazing Spacer

NOTE: For glass values that are not listed, linear interpolation is permitted.

1. U-Factors are determined in accordance with NFRC 100.
2. SHGC and VT values are determined in accordance with NFRC 200.
3. Glass properties are based on center of glass values and are obtained from your glass supplier.
4. Overall U-Factor, SHGC, and VT Matrices are based on the standard NFRC specimen size of 2,000 mm wide by 2,000 mm high (78-3/4" by 78-3/4").

SHGC Matrix²

Glass SHGC ³	Overall SHGC ⁴
0.90	0.80
0.85	0.76
0.80	0.71
0.75	0.67
0.70	0.63
0.65	0.58
0.60	0.64
0.55	0.49
0.50	0.45
0.45	0.41
0.40	0.36
0.35	0.32
0.30	0.27
0.25	0.23
0.20	0.18

Visible Transmittance²

Glass VT ³	Overall VT ⁴
0.90	0.79
0.85	0.75
0.80	0.71
0.75	0.66
0.70	0.62
0.65	0.57
0.60	0.53
0.55	0.49
0.50	0.44
0.45	0.40
0.40	0.35
0.35	0.31
0.30	0.26
0.25	0.22
0.20	0.18

Trifab® VersaGlaze® 451 Pre-Glazed (CENTER – Non-Thermal) Aluminum Glazing Spacer


Note:

Values in parentheses are metric.

COG=Center of Glass.

Charts are generated per AAMA 507.

System U-factor vs Percent of Glass Area

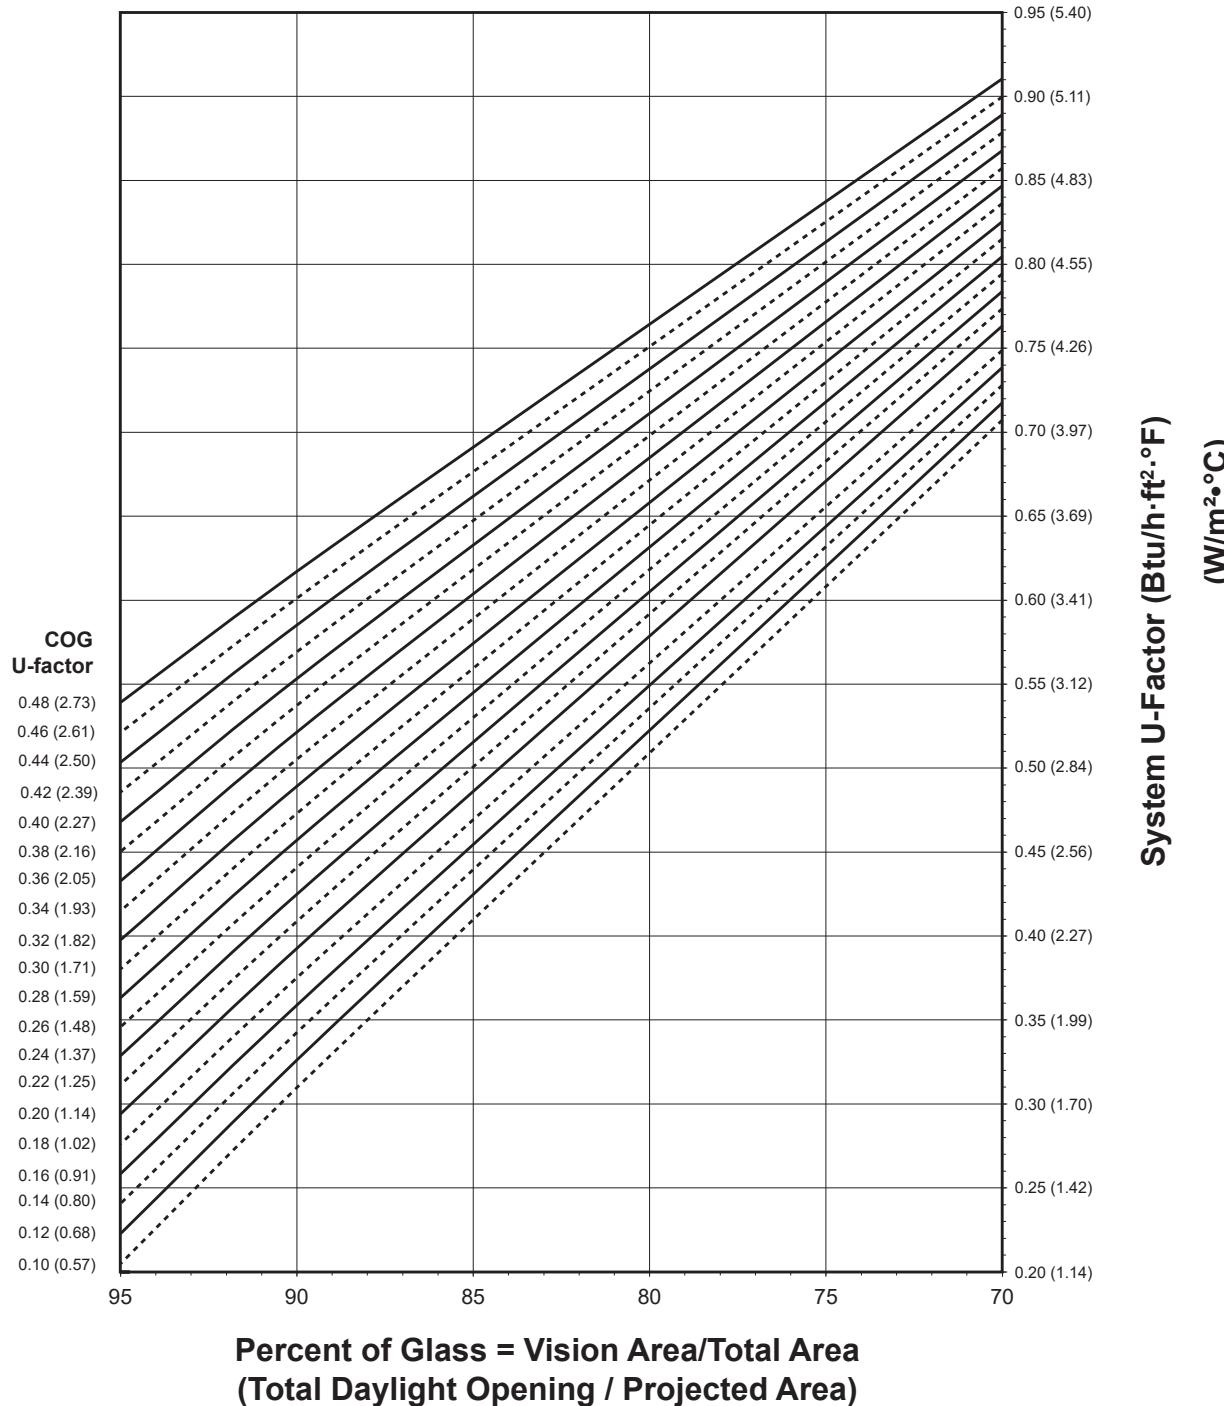

Notes for System U-factor, SHGC, and VT charts:

For glass values not listed, linear interpolation is permitted.

Glass Properties are based on center of glass values and are obtained from your glass supplier.


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.


**Trifab® VersaGlaze® 451 Pre-Glazed (CENTER – Non-Thermal)
Aluminum Glazing Spacer**

System Solar Heat Gain Coefficient (SHGC) vs Percent of Vision Area

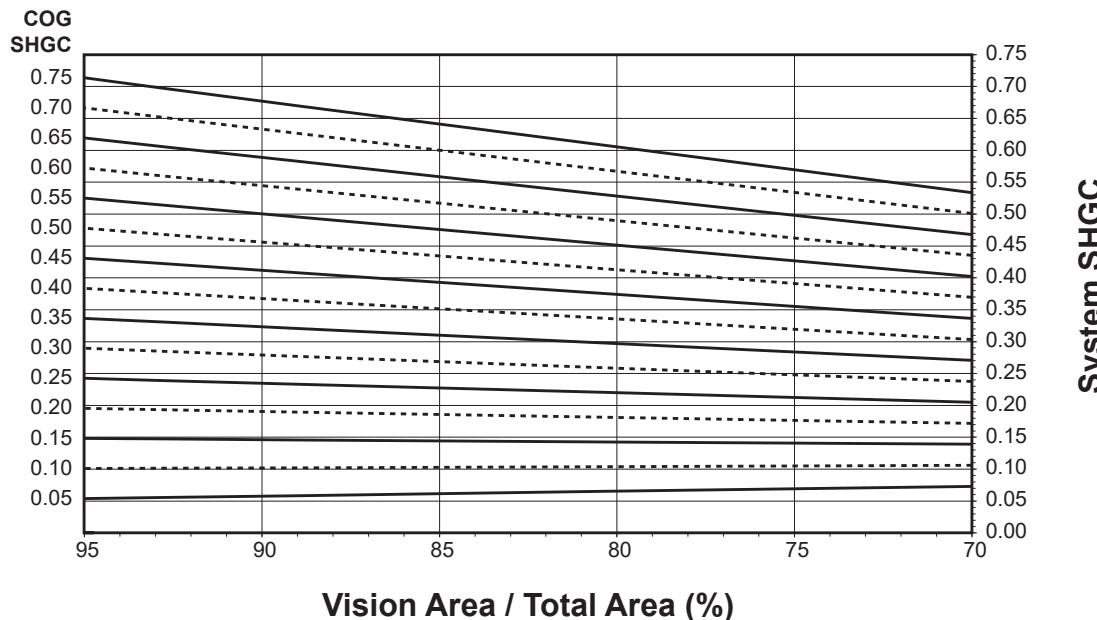

Charts are generated per AAMA 507.

System Visible Transmittance (VT) vs Percent of Vision Area

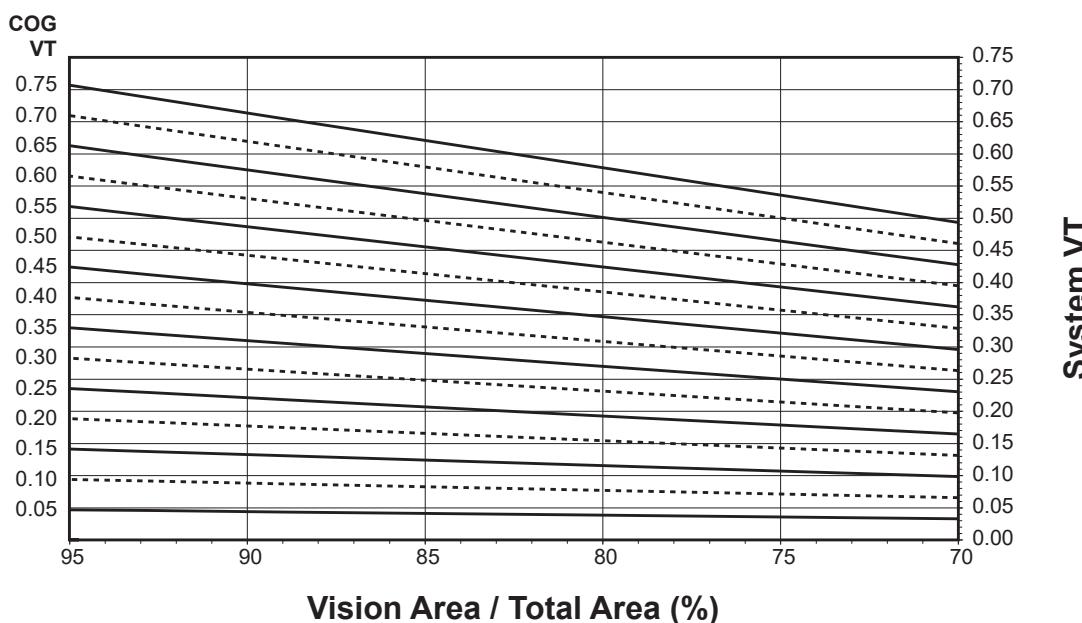

Charts are generated per AAMA 507.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Thermal Transmittance ¹ (BTU/hr • ft ² • °F)

Glass U-Factor ³	Overall U-Factor ⁴
0.48	0.63
0.46	0.62
0.44	0.60
0.42	0.59
0.40	0.57
0.38	0.56
0.36	0.54
0.34	0.52
0.32	0.51
0.30	0.49
0.28	0.48
0.26	0.46
0.24	0.45
0.22	0.43
0.20	0.41
0.18	0.40
0.16	0.38
0.14	0.36
0.12	0.35
0.10	0.33

SHGC Matrix ²

Glass SHGC ³	Overall SHGC ⁴
0.75	0.67
0.70	0.63
0.65	0.58
0.60	0.54
0.55	0.49
0.50	0.45
0.45	0.41
0.40	0.36
0.35	0.32
0.30	0.28
0.25	0.23
0.20	0.19
0.15	0.15
0.10	0.10
0.05	0.06

Trifab® VersaGlaze® 451
Pre-Glazed
(CENTER – Non-Thermal)
Aluminum Glazing Spacer

NOTE: For glass values that are not listed, linear interpolation is permitted.

1. U-Factors are determined in accordance with NFRC 100.
2. SHGC and VT values are determined in accordance with NFRC 200.
3. Glass properties are based on center of glass values and are obtained from your glass supplier.
4. Overall U-Factor, SHGC, and VT Matrices are based on the standard NFRC specimen size of 2,000 mm wide by 2,000 mm high (78-3/4" by 78-3/4").

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Visible Transmittance ²

Glass VT ³	Overall VT ⁴
0.75	0.65
0.70	0.61
0.65	0.57
0.60	0.52
0.55	0.48
0.50	0.44
0.45	0.39
0.40	0.35
0.35	0.31
0.30	0.26
0.25	0.22
0.20	0.17
0.15	0.13
0.10	0.09
0.05	0.04

Trifab® VersaGlaze® 451T (CENTER – Thermal)

Warm-Edge Glazing Spacer

Note:

Values in parentheses are metric.

COG=Center of Glass.


Charts are generated per AAMA 507.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

System U-factor vs Percent of Glass Area

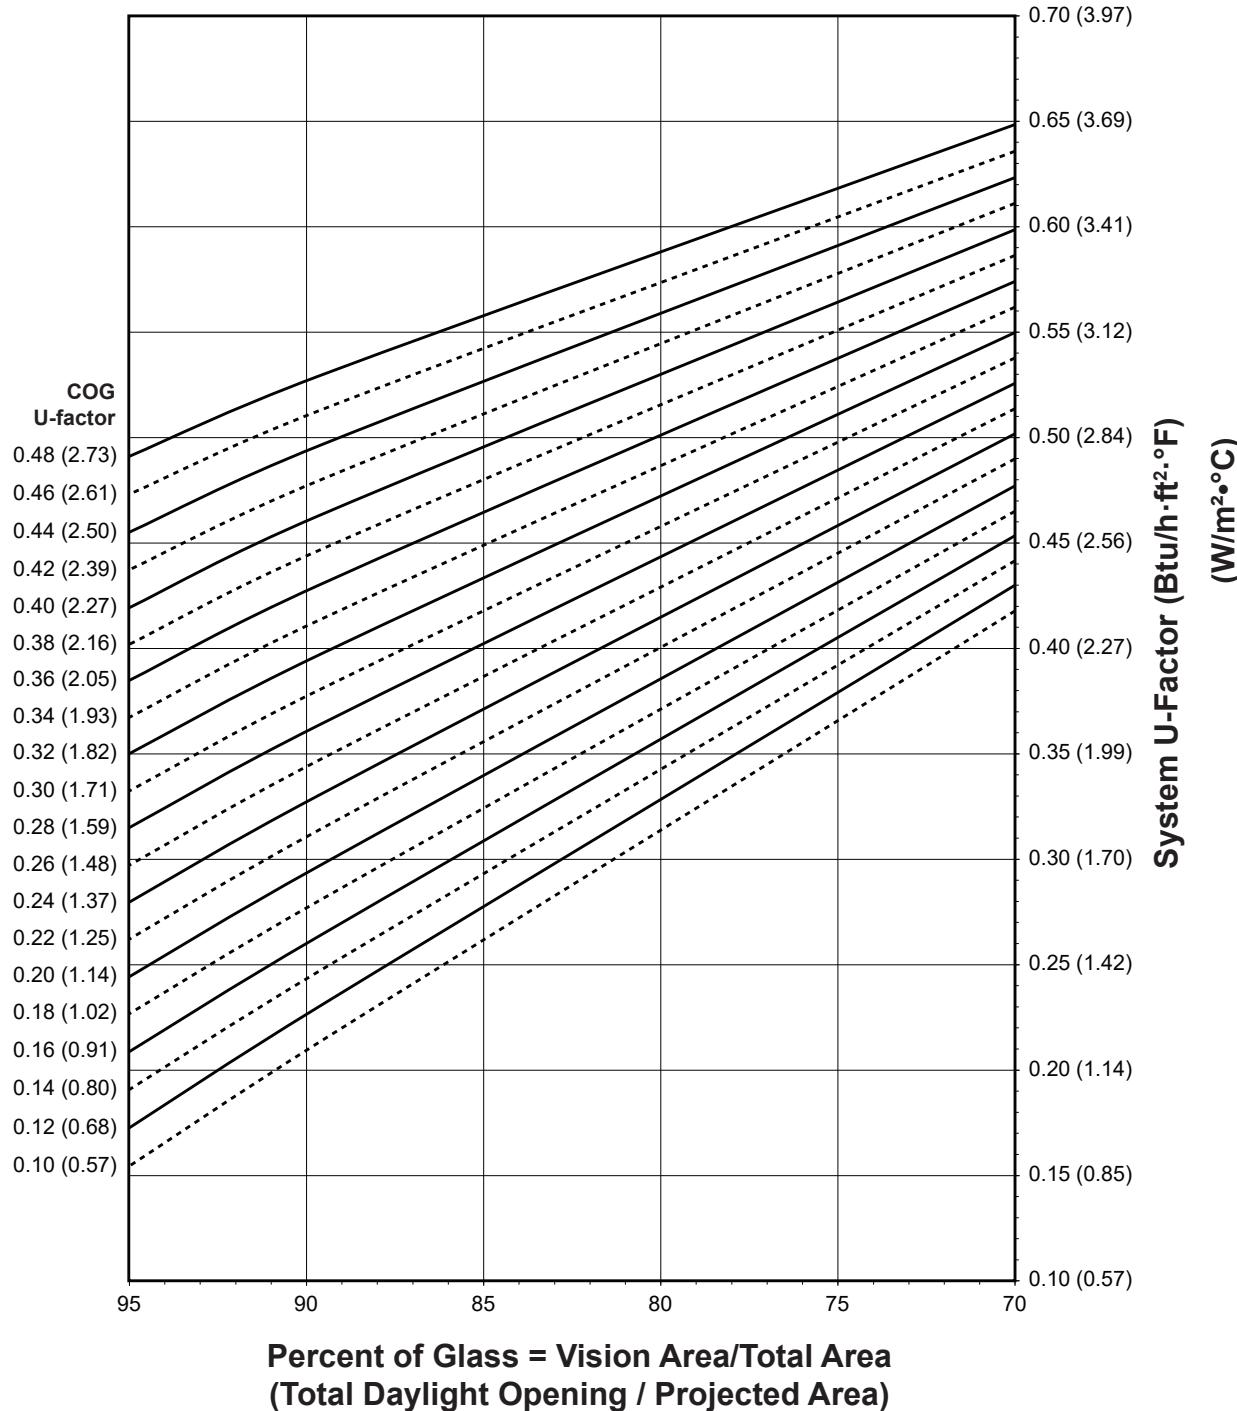

Percent of Glass = Vision Area/Total Area
(Total Daylight Opening / Projected Area)

Notes for System U-factor, SHGC, and VT charts:


For glass values not listed, linear interpolation is permitted.

Glass Properties are based on center of glass values and are obtained from your glass supplier.

Trifab® VersaGlaze® 451T (CENTER – Thermal)


Warm-Edge Glazing Spacer

System Solar Heat Gain Coefficient (SHGC) vs Percent of Vision Area

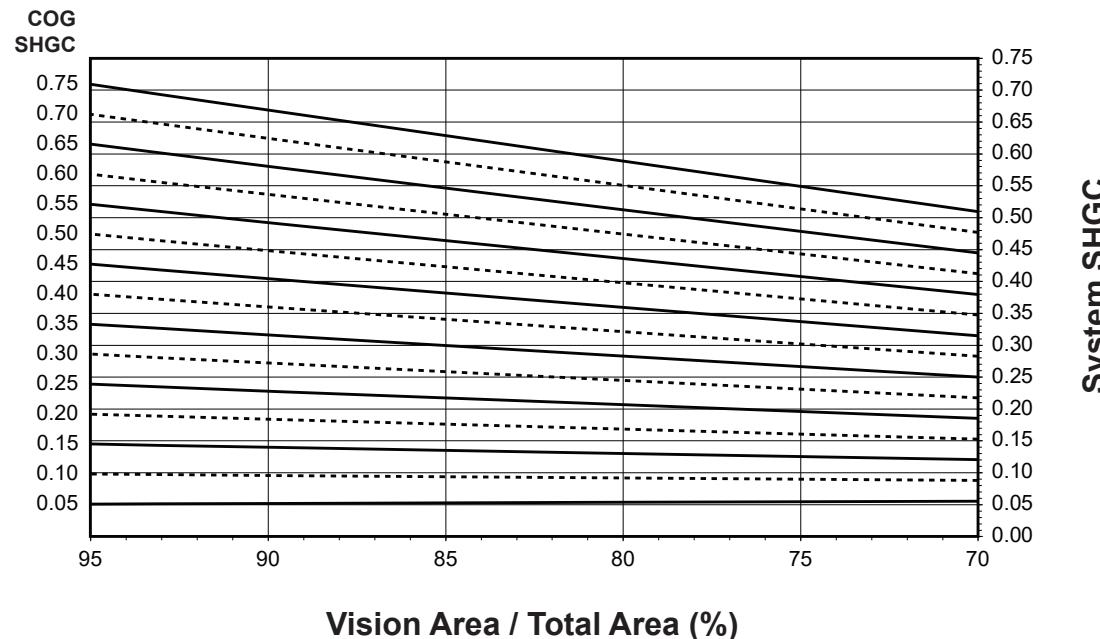

Charts are generated per AAMA 507.

System Visible Transmittance (VT) vs Percent of Vision Area

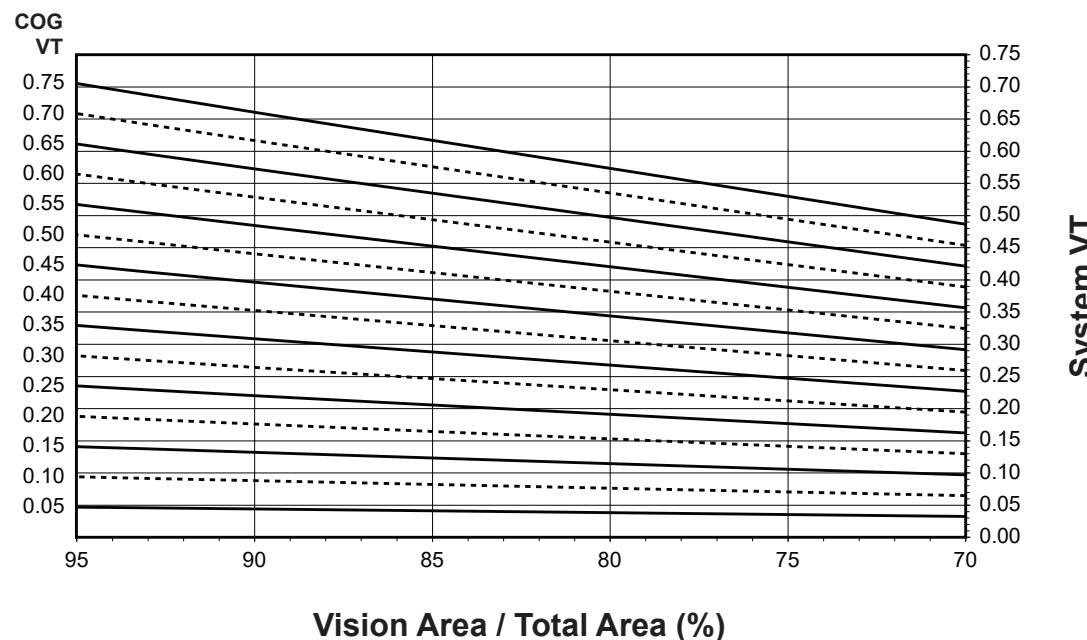

Charts are generated per AAMA 507.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Thermal Transmittance ¹ (BTU/hr • ft ² • °F)

Glass U-Factor ³	Overall U-Factor ⁴
0.48	0.53
0.46	0.51
0.44	0.50
0.42	0.48
0.40	0.46
0.38	0.45
0.36	0.43
0.34	0.41
0.32	0.40
0.30	0.38
0.28	0.36
0.26	0.35
0.24	0.33
0.22	0.31
0.20	0.30
0.18	0.28
0.16	0.26
0.14	0.25
0.12	0.23
0.10	0.21

Trifab® VersaGlaze® 451T
(CENTER – Thermal)
Warm-Edge Glazing Spacer

NOTE: For glass values that are not listed, linear interpolation is permitted.

1. U-Factors are determined in accordance with NFRC 100.
2. SHGC and VT values are determined in accordance with NFRC 200.
3. Glass properties are based on center of glass values and are obtained from your glass supplier.
4. Overall U-Factor, SHGC, and VT Matrices are based on the standard NFRC specimen size of 2,000 mm wide by 2,000 mm high (78-3/4" by 78-3/4").

SHGC Matrix ²

Glass SHGC ³	Overall SHGC ⁴
0.75	0.67
0.70	0.62
0.65	0.58
0.60	0.53
0.55	0.49
0.50	0.45
0.45	0.40
0.40	0.36
0.35	0.31
0.30	0.27
0.25	0.23
0.20	0.18
0.15	0.14
0.10	0.10
0.05	0.05

Visible Transmittance ²

Glass VT ³	Overall VT ⁴
0.75	0.66
0.70	0.61
0.65	0.57
0.60	0.53
0.55	0.48
0.50	0.44
0.45	0.39
0.40	0.35
0.35	0.31
0.30	0.26
0.25	0.22
0.20	0.18
0.15	0.13
0.10	0.09
0.05	0.04

Trifab® VersaGlaze® 451T (CENTER – Thermal)

Aluminum Glazing Spacer


Note:

Values in parentheses are metric.

COG=Center of Glass.

Charts are generated per AAMA 507.

System U-factor vs Percent of Glass Area

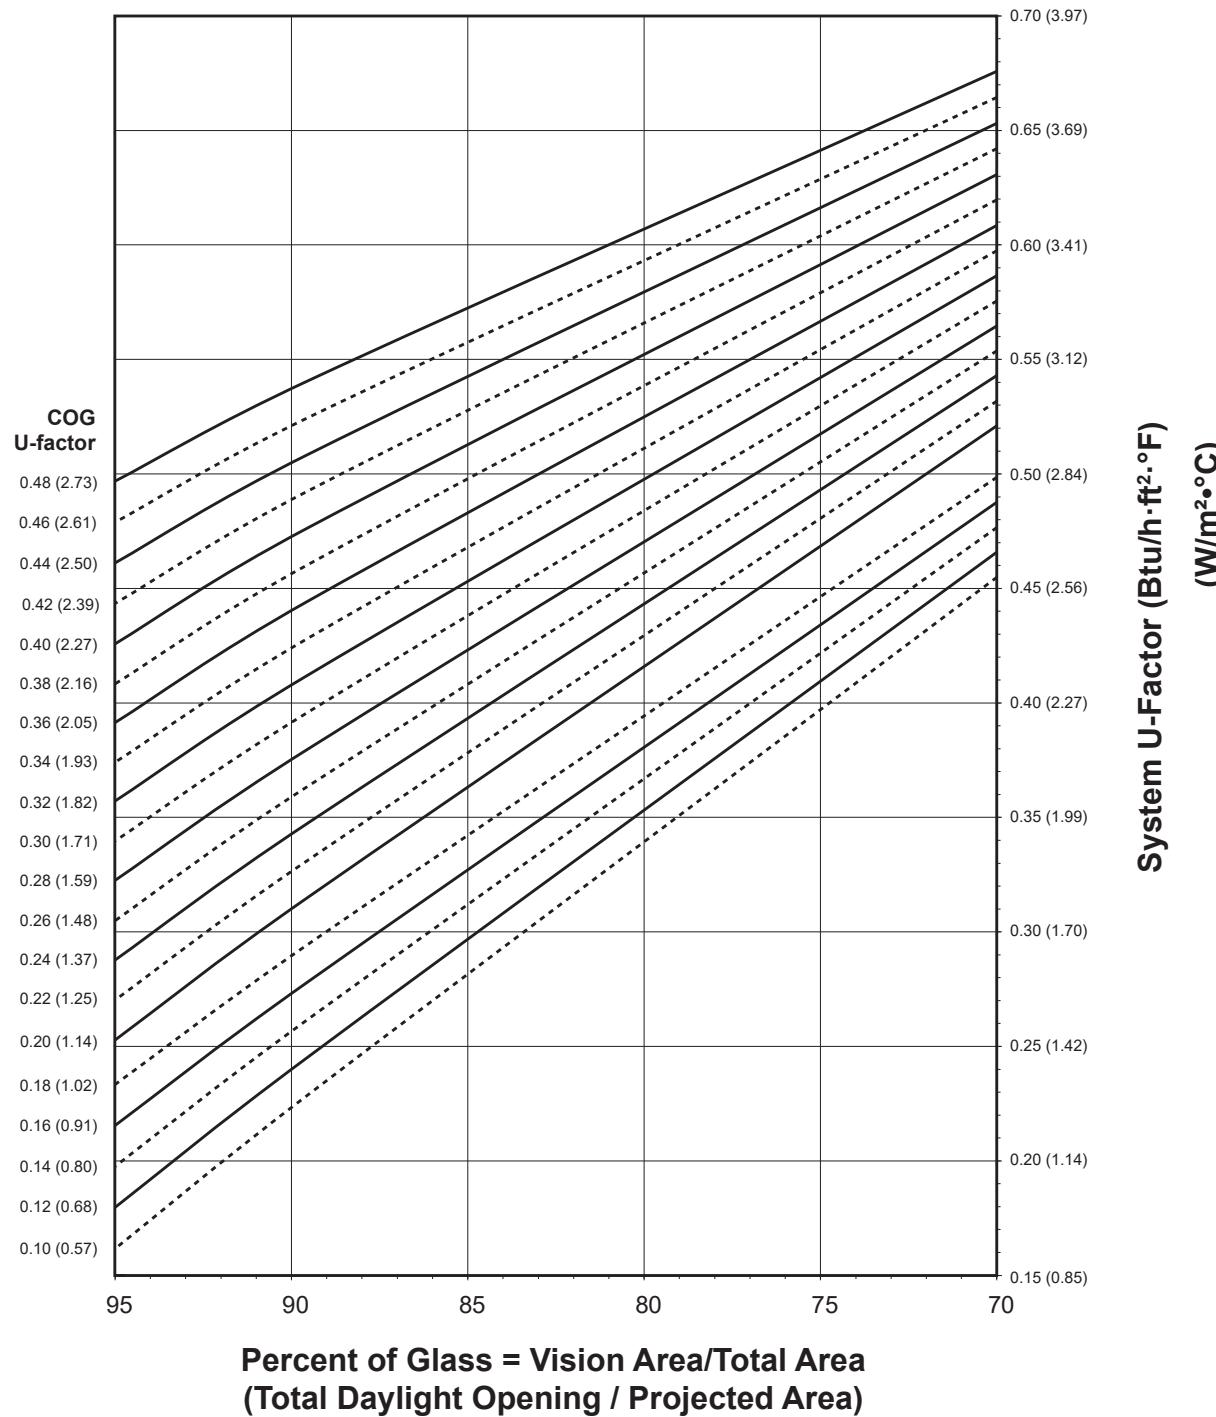

Notes for System U-factor, SHGC, and VT charts:

For glass values not listed, linear interpolation is permitted.

Glass Properties are based on center of glass values and are obtained from your glass supplier.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Trifab® VersaGlaze® 451T (CENTER – Thermal)

Aluminum Glazing Spacer

System Solar Heat Gain Coefficient (SHGC) vs Percent of Vision Area

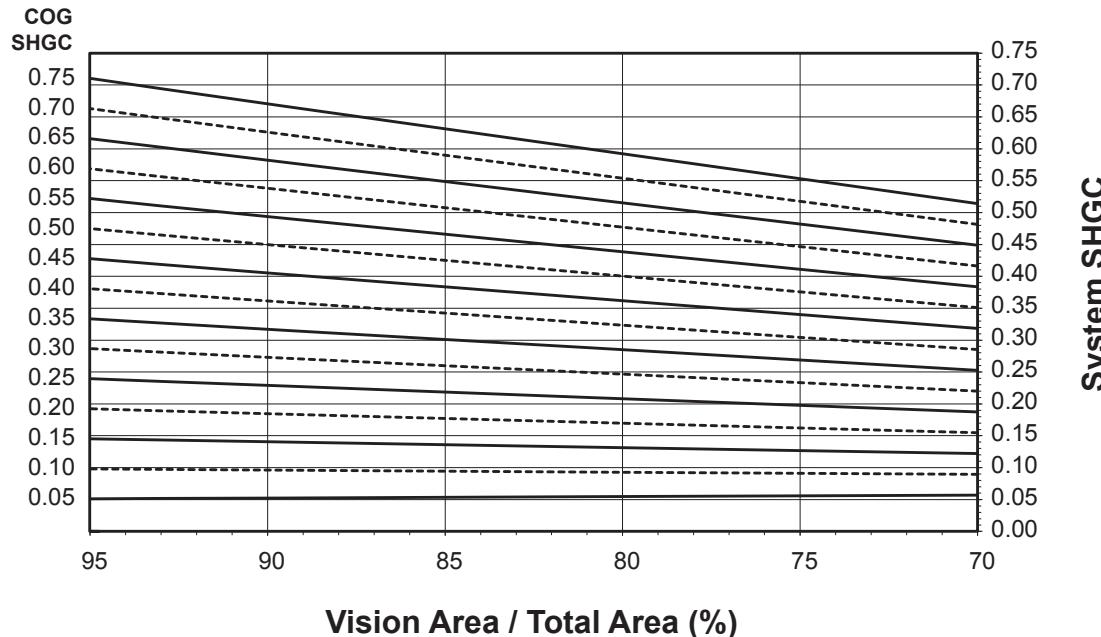


Charts are generated per AAMA 507.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

System Visible Transmittance (VT) vs Percent of Vision Area

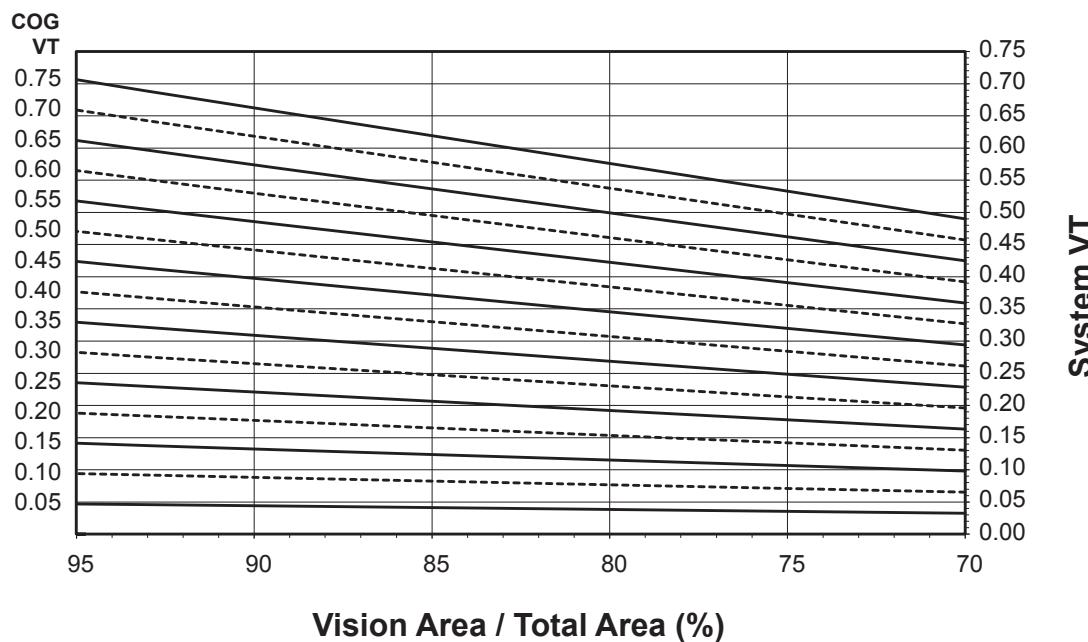

Charts are generated per AAMA 507.

Thermal Transmittance ¹ (BTU/hr • ft ² • °F)

Glass U-Factor ³	Overall U-Factor ⁴
0.48	0.54
0.46	0.52
0.44	0.51
0.42	0.49
0.40	0.48
0.38	0.46
0.36	0.44
0.34	0.43
0.32	0.41
0.30	0.40
0.28	0.38
0.26	0.36
0.24	0.35
0.22	0.33
0.20	0.32
0.18	0.29
0.16	0.28
0.14	0.26
0.12	0.25
0.10	0.23

SHGC Matrix ²

Glass SHGC ³	Overall SHGC ⁴
0.75	0.67
0.70	0.62
0.65	0.58
0.60	0.53
0.55	0.49
0.50	0.45
0.45	0.40
0.40	0.36
0.35	0.32
0.30	0.27
0.25	0.23
0.20	0.18
0.15	0.14
0.10	0.10
0.05	0.05

Trifab® VersaGlaze® 451T
(CENTER – Thermal)
Aluminum Glazing Spacer

NOTE: For glass values that are not listed, linear interpolation is permitted.

1. U-Factors are determined in accordance with NFRC 100.
2. SHGC and VT values are determined in accordance with NFRC 200.
3. Glass properties are based on center of glass values and are obtained from your glass supplier.
4. Overall U-Factor, SHGC, and VT Matrices are based on the standard NFRC specimen size of 2,000 mm wide by 2,000 mm high (78-3/4" by 78-3/4").

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Visible Transmittance ²

Glass VT ³	Overall VT ⁴
0.75	0.66
0.70	0.61
0.65	0.57
0.60	0.53
0.55	0.48
0.50	0.44
0.45	0.39
0.40	0.35
0.35	0.31
0.30	0.26
0.25	0.22
0.20	0.18
0.15	0.13
0.10	0.09
0.05	0.04

Trifab® VersaGlaze® 451T Pre-Glazed (CENTER – Thermal) Aluminum Glazing Spacer

Note:

Values in parentheses are metric.

COG=Center of Glass.


Charts are generated per AAMA 507.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

System U-factor vs Percent of Glass Area

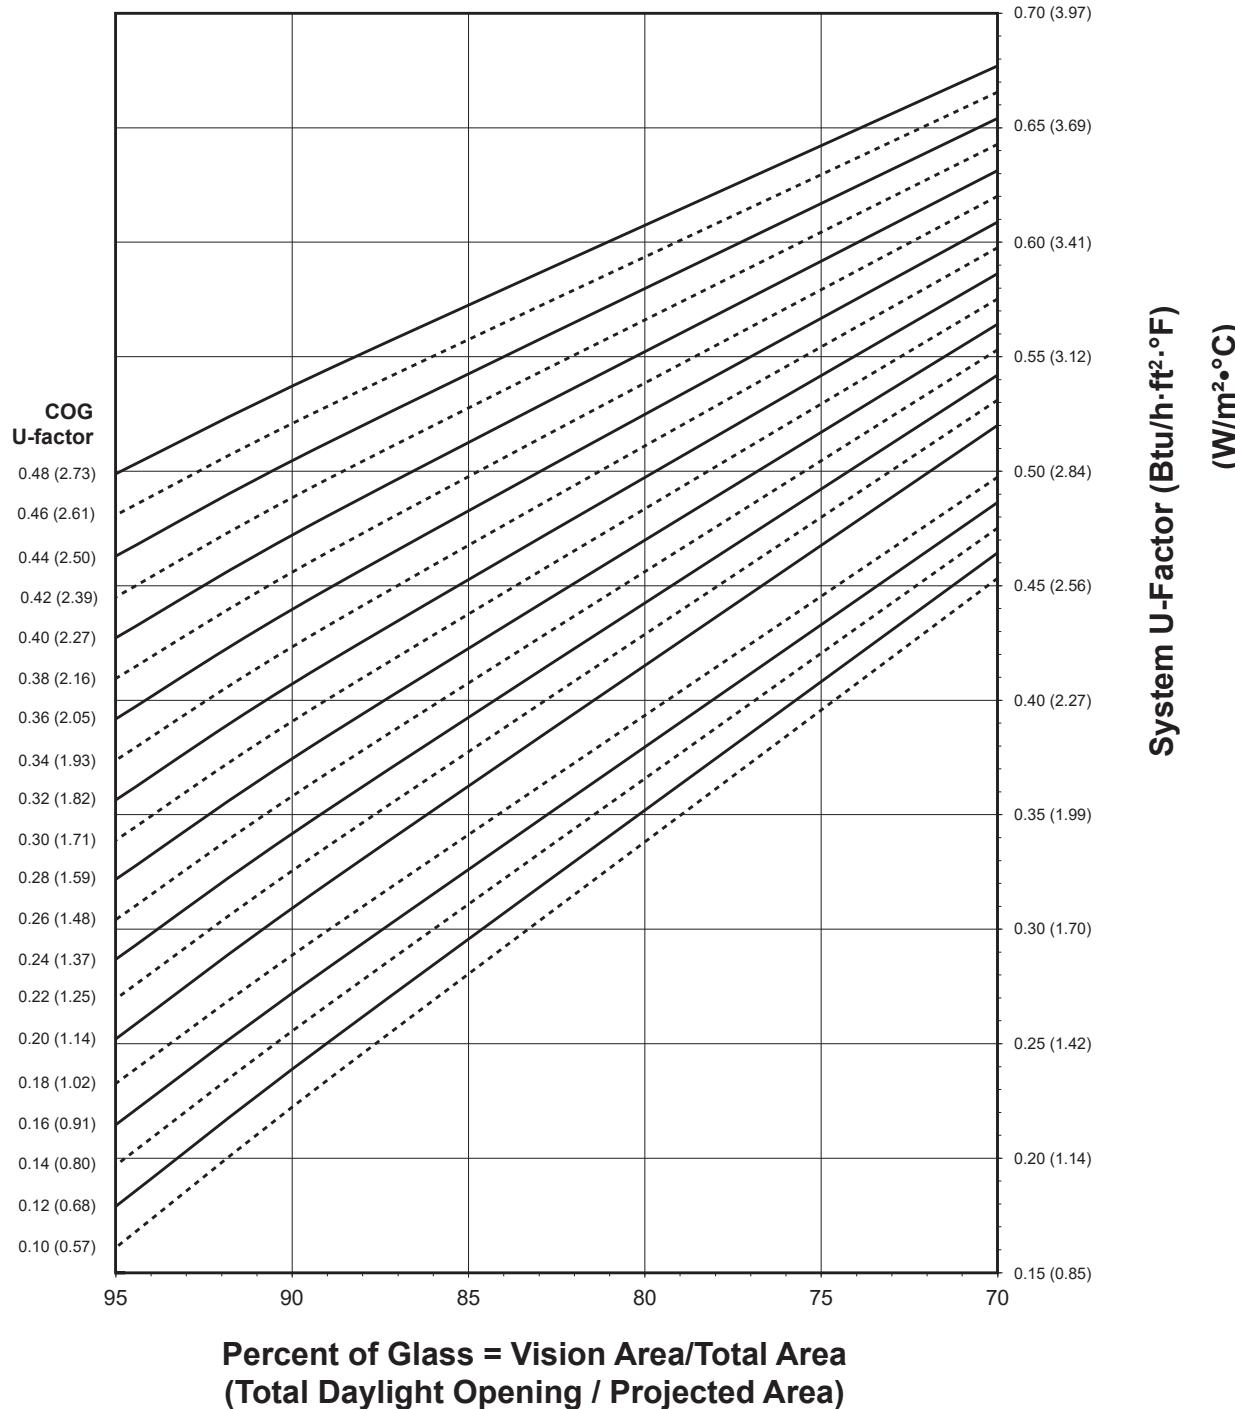

Notes for System U-factor, SHGC, and VT charts:


For glass values not listed, linear interpolation is permitted.

Glass Properties are based on center of glass values and are obtained from your glass supplier.

Trifab® VersaGlaze® 451T Pre-Glazed (CENTER – Thermal)


Aluminum Glazing Spacer

System Solar Heat Gain Coefficient (SHGC) vs Percent of Vision Area

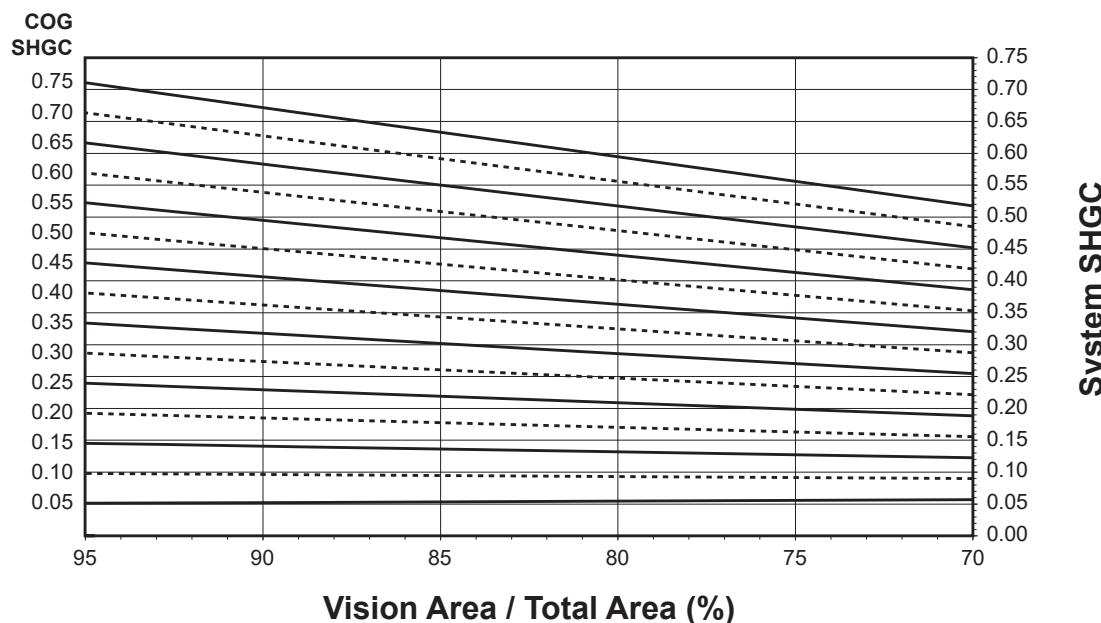

Charts are generated per AAMA 507.

System Visible Transmittance (VT) vs Percent of Vision Area

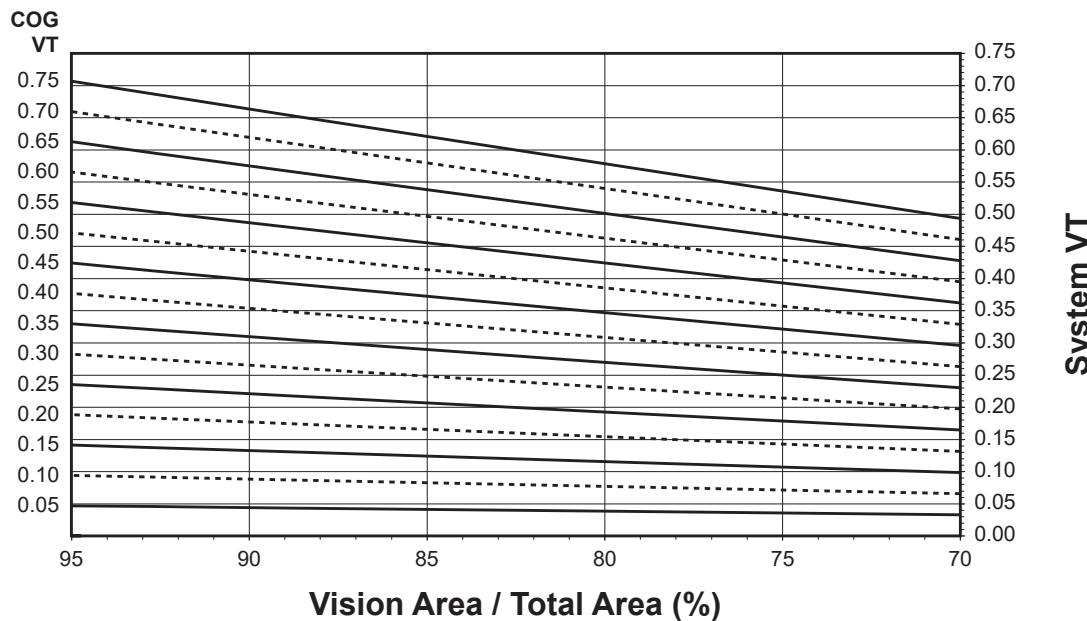

Charts are generated per AAMA 507.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Thermal Transmittance ¹ (BTU/hr • ft ² • °F)

Glass U-Factor ³	Overall U-Factor ⁴
0.48	0.55
0.46	0.53
0.44	0.51
0.42	0.50
0.40	0.48
0.38	0.47
0.36	0.45
0.34	0.43
0.32	0.42
0.30	0.40
0.28	0.39
0.26	0.37
0.24	0.35
0.22	0.34
0.20	0.32
0.18	0.30
0.16	0.28
0.14	0.27
0.12	0.25
0.10	0.24

Trifab® VersaGlaze® 451T
Pre-Glazed
(CENTER – Thermal)
Aluminum Glazing Spacer

NOTE: For glass values that are not listed, linear interpolation is permitted.

1. U-Factors are determined in accordance with NFRC 100.
2. SHGC and VT values are determined in accordance with NFRC 200.
3. Glass properties are based on center of glass values and are obtained from your glass supplier.
4. Overall U-Factor, SHGC, and VT Matrices are based on the standard NFRC specimen size of 2,000 mm wide by 2,000 mm high (78-3/4" by 78-3/4").

SHGC Matrix ²

Glass SHGC ³	Overall SHGC ⁴
0.75	0.66
0.70	0.62
0.65	0.58
0.60	0.53
0.55	0.49
0.50	0.45
0.45	0.40
0.40	0.36
0.35	0.31
0.30	0.27
0.25	0.23
0.20	0.18
0.15	0.14
0.10	0.10
0.05	0.05

Visible Transmittance ²

Glass VT ³	Overall VT ⁴
0.75	0.65
0.70	0.61
0.65	0.57
0.60	0.52
0.55	0.48
0.50	0.44
0.45	0.39
0.40	0.35
0.35	0.31
0.30	0.26
0.25	0.22
0.20	0.17
0.15	0.13
0.10	0.09
0.05	0.04

Trifab® VersaGlaze® 451T (FRONT – Thermal)

Warm-Edge Glazing Spacer


Note:

Values in parentheses are metric.

COG=Center of Glass.

Charts are generated per AAMA 507.

System U-factor vs Percent of Glass Area

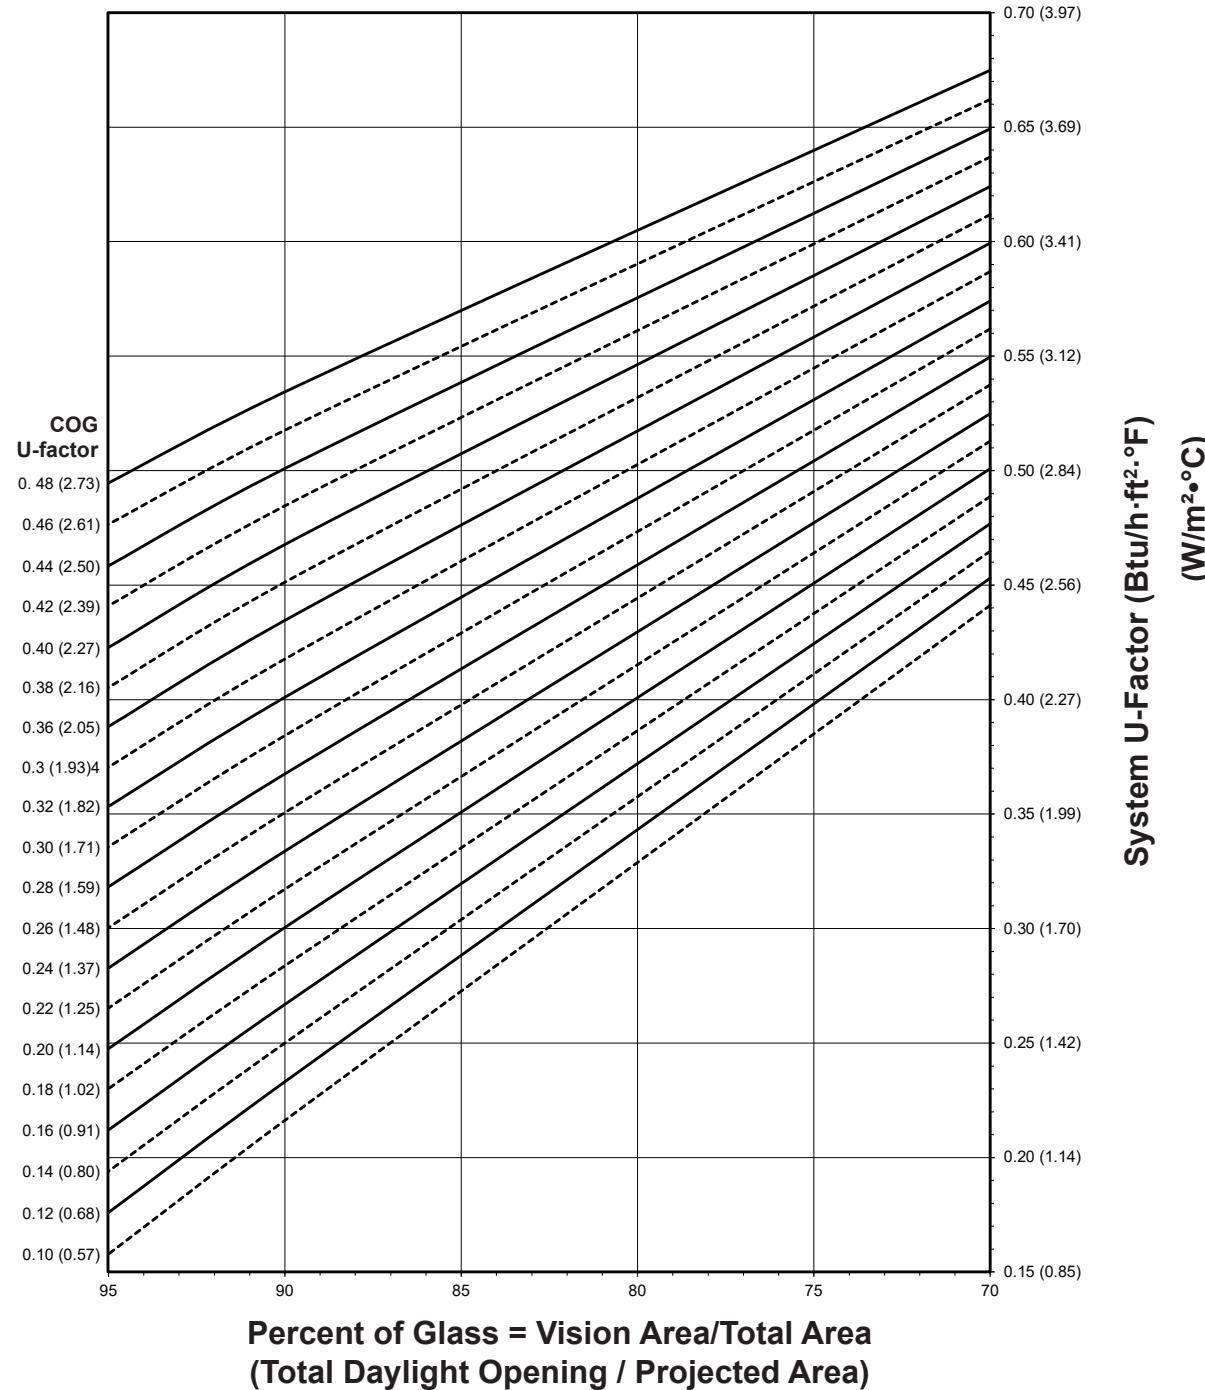

Notes for System U-factor, SHGC, and VT charts:

For glass values not listed, linear interpolation is permitted.

Glass Properties are based on center of glass values and are obtained from your glass supplier.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.


Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Trifab® VersaGlaze® 451T (FRONT – Thermal)


Warm-Edge Glazing Spacer

System Solar Heat Gain Coefficient (SHGC) vs Percent of Vision Area

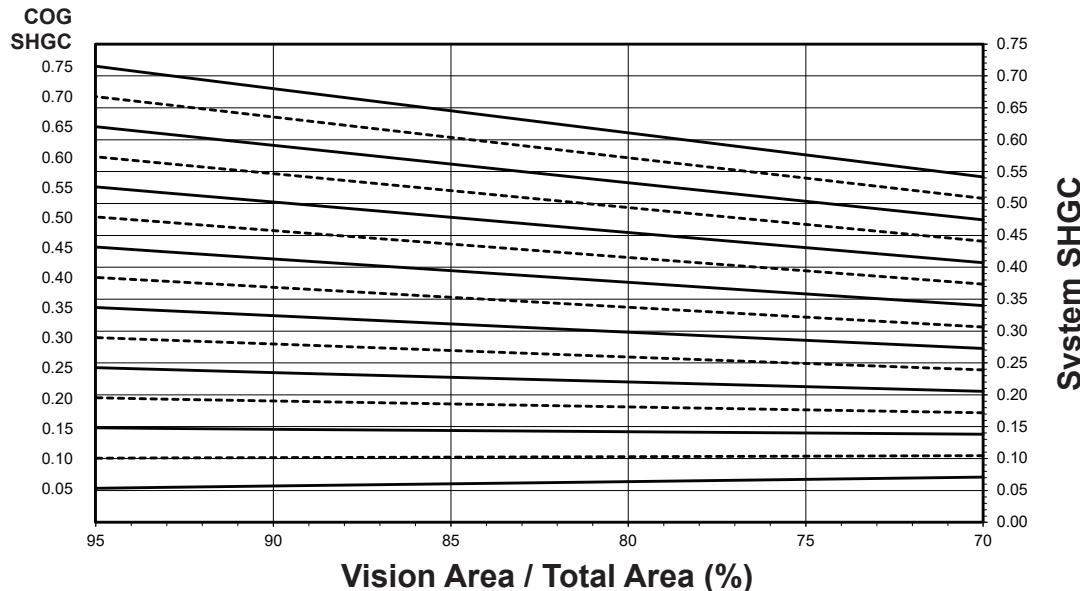

Charts are generated per AAMA 507.

System Visible Transmittance (VT) vs Percent of Vision Area

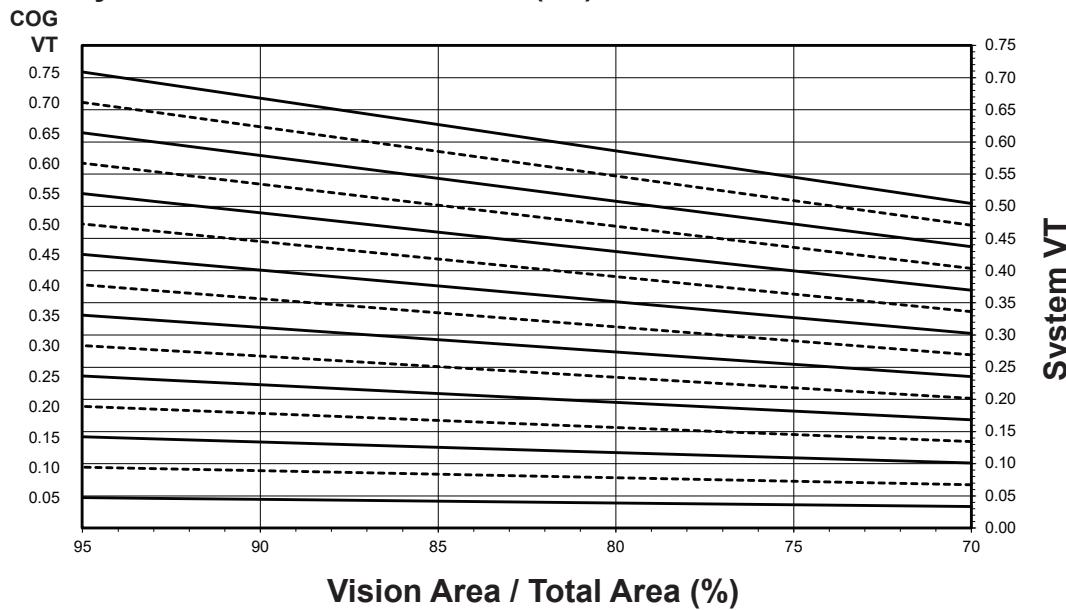

Charts are generated per AAMA 507.

Thermal Transmittance ¹ (BTU/hr • ft ² • °F)

Glass U-Factor ³	Overall U-Factor ⁴
0.48	0.54
0.46	0.52
0.44	0.50
0.42	0.49
0.40	0.47
0.38	0.46
0.36	0.44
0.34	0.42
0.32	0.41
0.30	0.39
0.28	0.37
0.26	0.36
0.24	0.34
0.22	0.32
0.20	0.31
0.18	0.29
0.16	0.27
0.14	0.26
0.12	0.24
0.10	0.22

SHGC Matrix ²

Glass SHGC ³	Overall SHGC ⁴
0.75	0.68
0.70	0.63
0.65	0.59
0.60	0.54
0.55	0.50
0.50	0.46
0.45	0.41
0.40	0.37
0.35	0.32
0.30	0.28
0.25	0.23
0.20	0.19
0.15	0.15
0.10	0.10
0.05	0.06

Trifab® VersaGlaze® 451T
(FRONT – Thermal)
Warm-Edge Glazing Spacer

NOTE: For glass values that are not listed, linear interpolation is permitted.

1. U-Factors are determined in accordance with NFRC 100.
2. SHGC and VT values are determined in accordance with NFRC 200.
3. Glass properties are based on center of glass values and are obtained from your glass supplier.
4. Overall U-Factor, SHGC, and VT Matrices are based on the standard NFRC specimen size of 2,000 mm wide by 2,000 mm high (78-3/4" by 78-3/4").

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Visible Transmittance ²

Glass VT ³	Overall VT ⁴
0.75	0.66
0.70	0.62
0.65	0.58
0.60	0.53
0.55	0.49
0.50	0.44
0.45	0.40
0.40	0.35
0.35	0.31
0.30	0.27
0.25	0.22
0.20	0.18
0.15	0.13
0.10	0.09
0.05	0.04

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Trifab® VersaGlaze® 451T (FRONT – Thermal)
Aluminum Glazing Spacer

Note:

Values in parentheses are metric.


COG=Center of Glass.

Charts are generated per AAMA 507.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

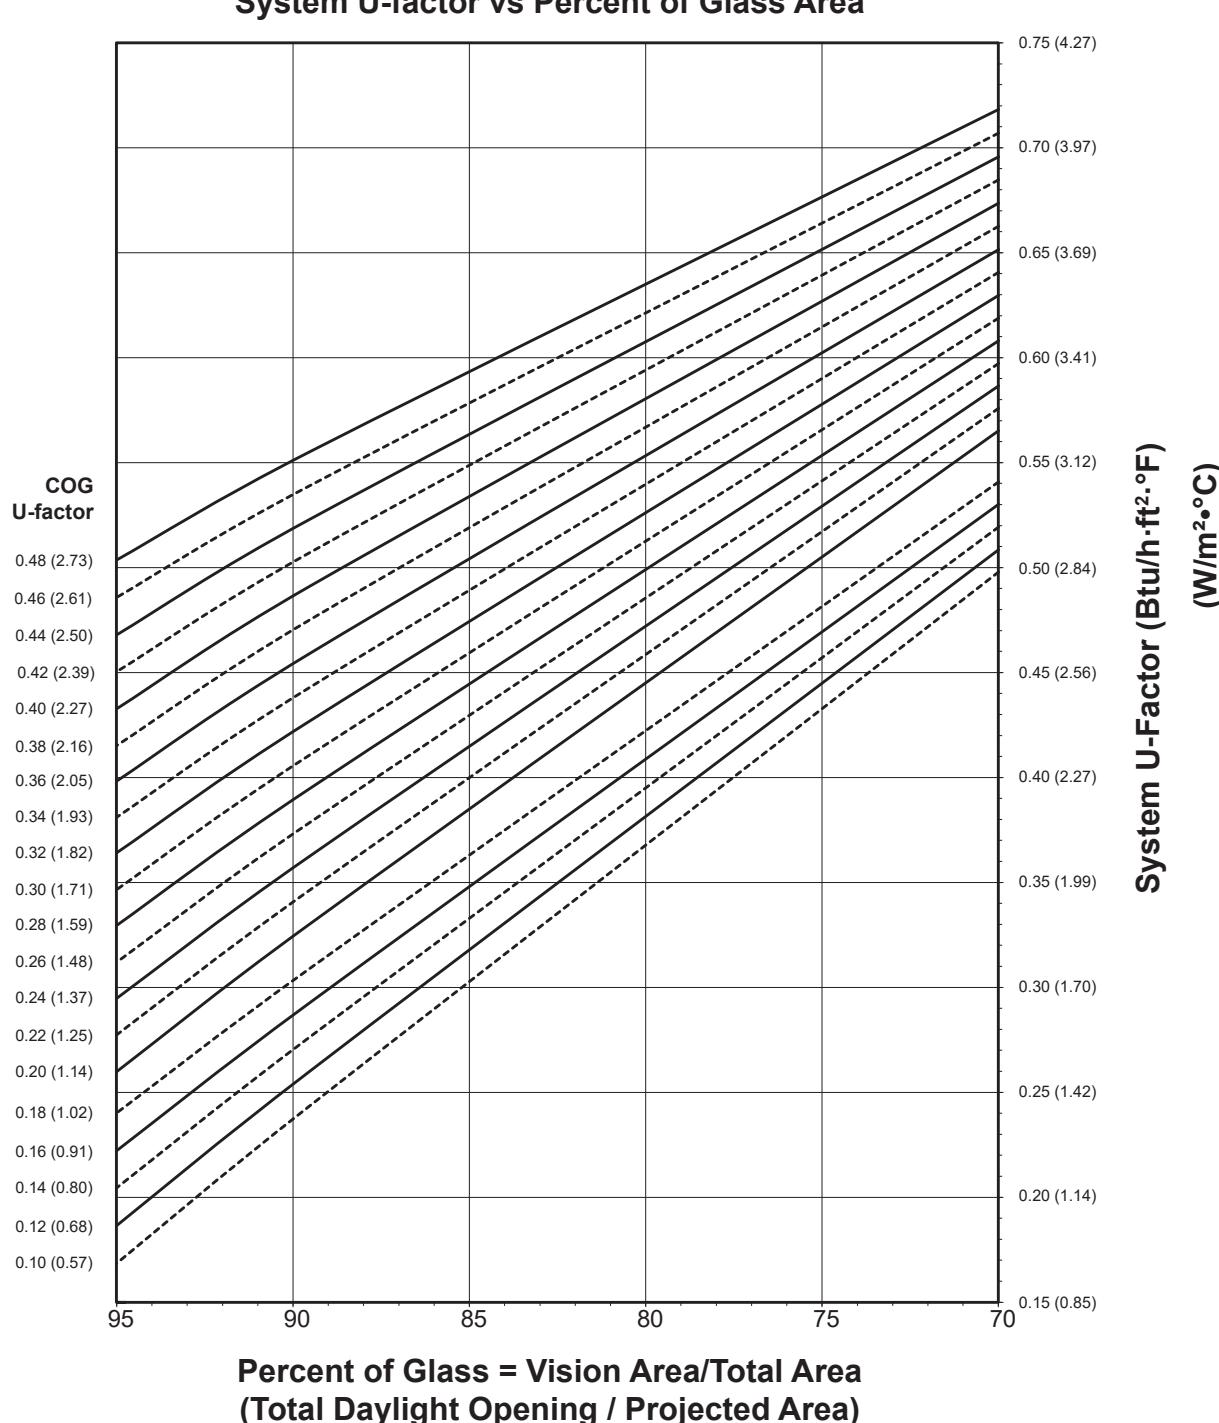

Notes for System U-factor, SHGC, and VT charts:


For glass values not listed, linear interpolation is permitted.

Glass Properties are based on center of glass values and are obtained from your glass supplier.

Trifab® VersaGlaze® 451T (FRONT – Thermal)


Aluminum Glazing Spacer

System Solar Heat Gain Coefficient (SHGC) vs Percent of Vision Area

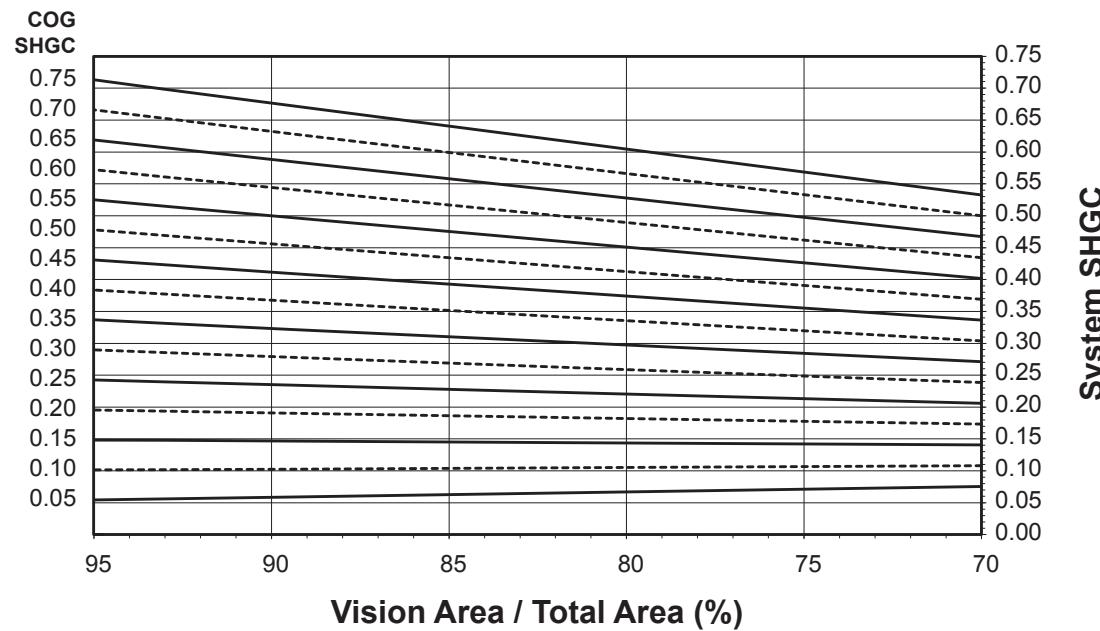

Charts are generated per AAMA 507.

System Visible Transmittance (VT) vs Percent of Vision Area

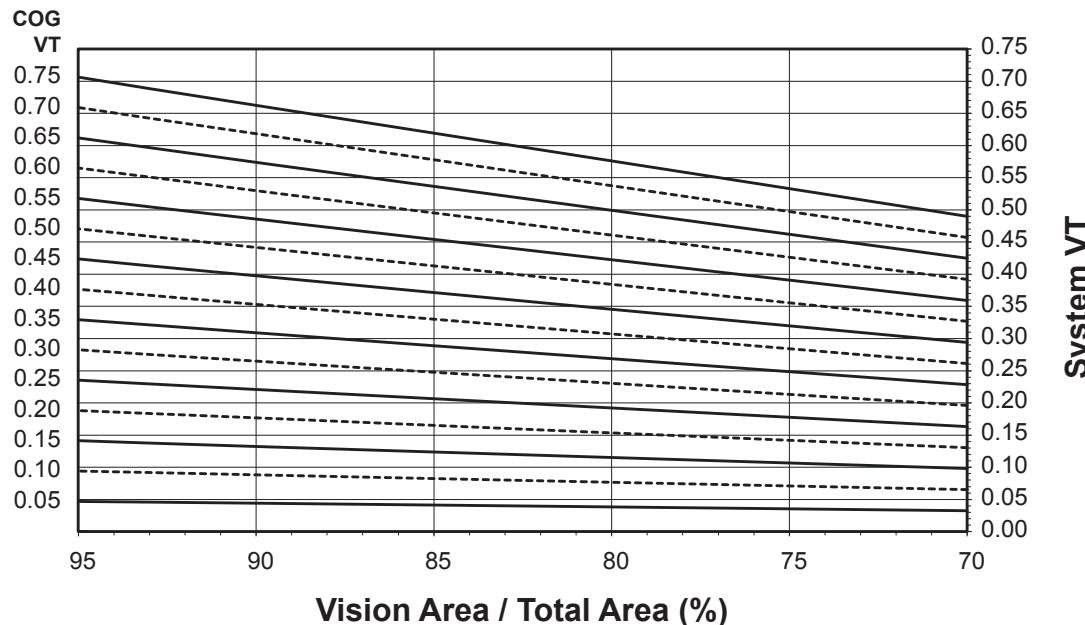

Charts are generated per AAMA 507.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Thermal Transmittance ¹ (BTU/hr • ft ² • °F)

Glass U-Factor ³	Overall U-Factor ⁴
0.48	0.56
0.46	0.54
0.44	0.52
0.42	0.51
0.40	0.49
0.38	0.48
0.36	0.46
0.34	0.44
0.32	0.43
0.30	0.41
0.28	0.40
0.26	0.38
0.24	0.36
0.22	0.35
0.20	0.33
0.18	0.31
0.16	0.29
0.14	0.28
0.12	0.26
0.10	0.24

Trifab® VersaGlaze® 451T
(FRONT – Thermal)
Aluminum Glazing Spacer

NOTE: For glass values that are not listed, linear interpolation is permitted.

1. U-Factors are determined in accordance with NFRC 100.
2. SHGC and VT values are determined in accordance with NFRC 200.
3. Glass properties are based on center of glass values and are obtained from your glass supplier.
4. Overall U-Factor, SHGC, and VT Matrices are based on the standard NFRC specimen size of 2,000 mm wide by 2,000 mm high (78-3/4" by 78-3/4").

SHGC Matrix ²

Glass SHGC ³	Overall SHGC ⁴
0.75	0.67
0.70	0.63
0.65	0.59
0.60	0.54
0.55	0.50
0.50	0.45
0.45	0.41
0.40	0.37
0.35	0.32
0.30	0.28
0.25	0.23
0.20	0.19
0.15	0.15
0.10	0.10
0.05	0.06

Visible Transmittance ²

Glass VT ³	Overall VT ⁴
0.75	0.66
0.70	0.61
0.65	0.57
0.60	0.53
0.55	0.48
0.50	0.44
0.45	0.39
0.40	0.35
0.35	0.31
0.30	0.26
0.25	0.22
0.20	0.18
0.15	0.13
0.10	0.09
0.05	0.04

Trifab® VersaGlaze® 451T (BACK – Thermal)

Aluminum Glazing Spacer


Note:

Values in parentheses are metric.

COG=Center of Glass.

Charts are generated per AAMA 507.

System U-factor vs Percent of Glass Area

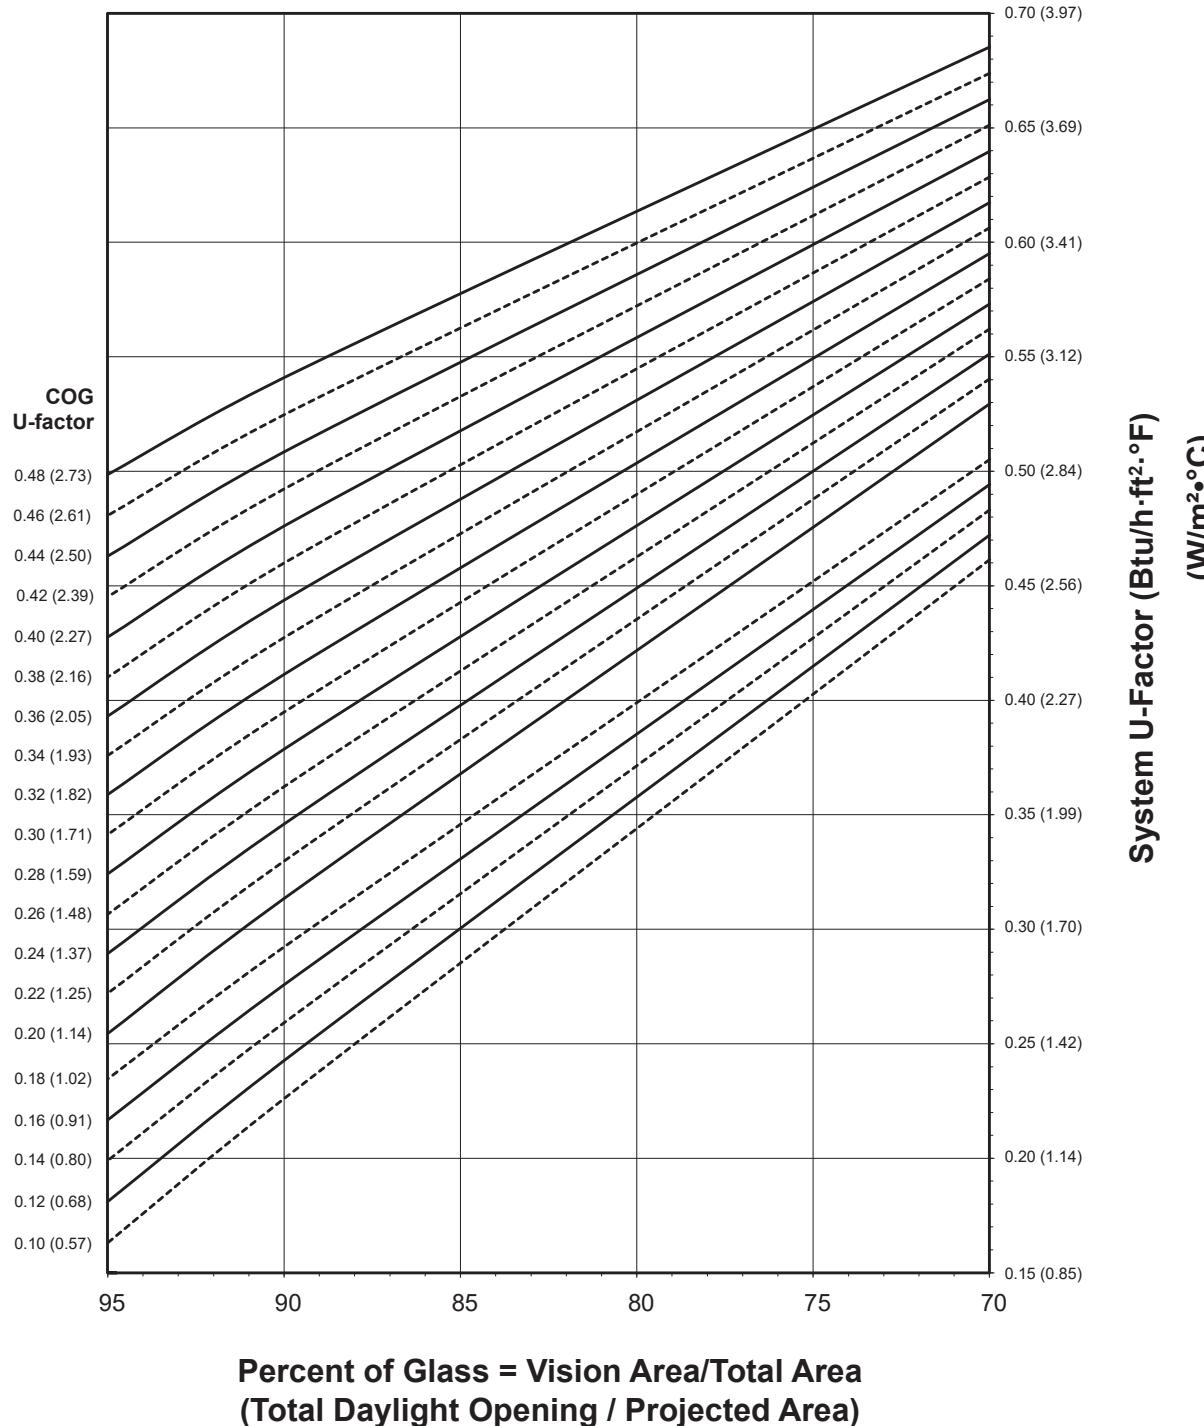

Notes for System U-factor, SHGC, and VT charts:

For glass values not listed, linear interpolation is permitted.

Glass Properties are based on center of glass values and are obtained from your glass supplier.


Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.


Trifab® VersaGlaze® 451T (BACK – Thermal)
Aluminum Glazing Spacer

System Solar Heat Gain Coefficient (SHGC) vs Percent of Vision Area

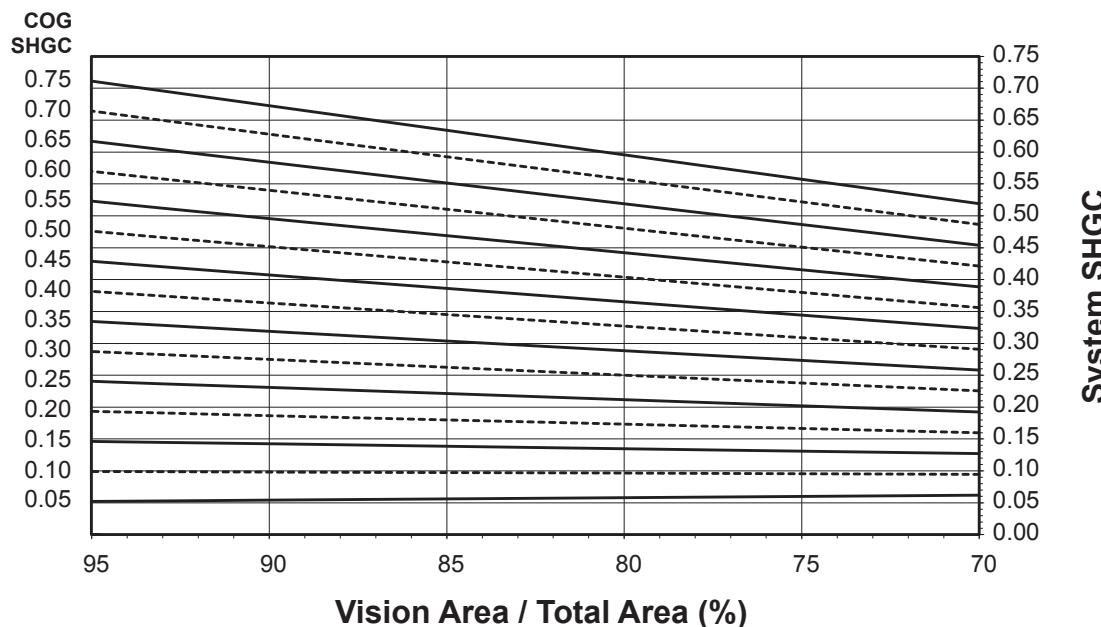

Charts are generated per AAMA 507.

System Visible Transmittance (VT) vs Percent of Vision Area

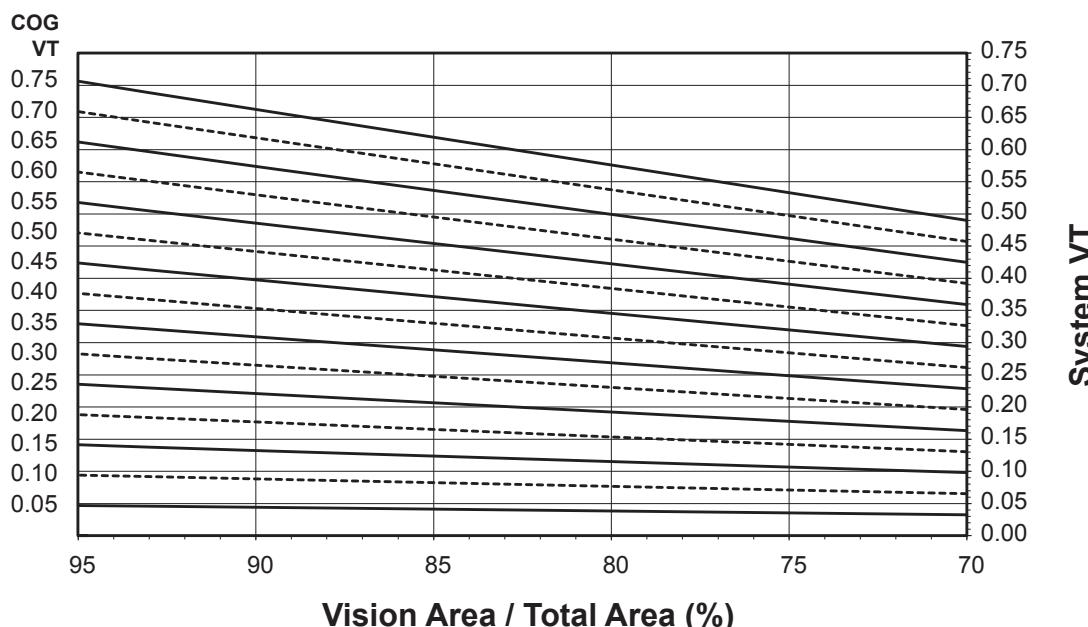

Charts are generated per AAMA 507.

Thermal Transmittance ¹ (BTU/hr • ft ² • °F)

Glass U-Factor ³	Overall U-Factor ⁴
0.48	0.54
0.46	0.53
0.44	0.51
0.42	0.50
0.40	0.48
0.38	0.46
0.36	0.45
0.34	0.43
0.32	0.42
0.30	0.40
0.28	0.38
0.26	0.37
0.24	0.35
0.22	0.34
0.20	0.32
0.18	0.30
0.16	0.28
0.14	0.26
0.12	0.25
0.10	0.23

SHGC Matrix ²

Glass SHGC ³	Overall SHGC ⁴
0.75	0.67
0.70	0.62
0.65	0.58
0.60	0.54
0.55	0.49
0.50	0.45
0.45	0.41
0.40	0.36
0.35	0.32
0.30	0.27
0.25	0.23
0.20	0.19
0.15	0.14
0.10	0.10
0.05	0.05

Trifab® VersaGlaze® 451T
(BACK – Thermal)
Aluminum Glazing Spacer

NOTE: For glass values that are not listed, linear interpolation is permitted.

1. U-Factors are determined in accordance with NFRC 100.
2. SHGC and VT values are determined in accordance with NFRC 200.
3. Glass properties are based on center of glass values and are obtained from your glass supplier.
4. Overall U-Factor, SHGC, and VT Matrices are based on the standard NFRC specimen size of 2,000 mm wide by 2,000 mm high (78-3/4" by 78-3/4").

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Visible Transmittance ²

Glass VT ³	Overall VT ⁴
0.75	0.66
0.70	0.61
0.65	0.57
0.60	0.53
0.55	0.48
0.50	0.44
0.45	0.39
0.40	0.35
0.35	0.31
0.30	0.26
0.25	0.22
0.20	0.18
0.15	0.13
0.10	0.09
0.05	0.04

Trifab® VersaGlaze® 451T with Steel (CENTER)
Aluminum Glazing Spacer


Note:

Values in parentheses are metric.

COG=Center of Glass.

Charts are generated per AAMA 507.

System U-factor vs Percent of Glass Area

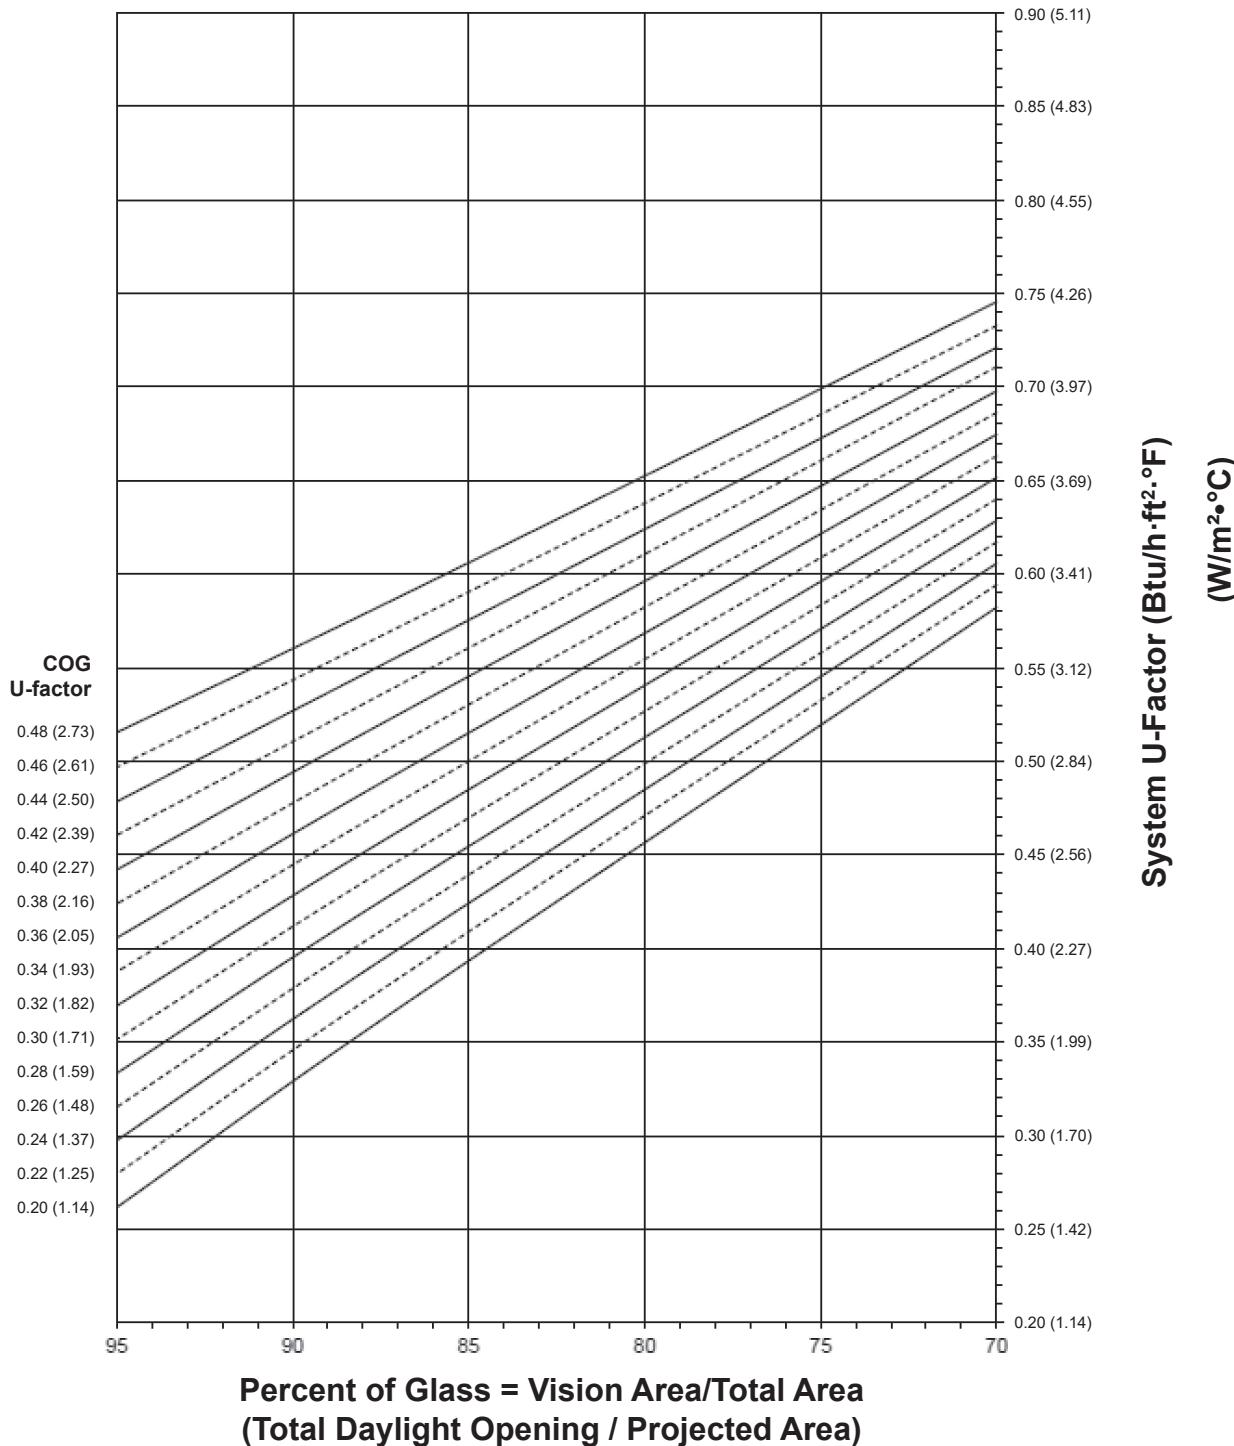

Notes for System U-factor, SHGC, and VT charts:


For glass values not listed, linear interpolation is permitted.

Glass Properties are based on center of glass values and are obtained from your glass supplier.

Trifab® VersaGlaze® 451T with Steel (CENTER)


Aluminum Glazing Spacer

System Solar Heat Gain Coefficient (SHGC) vs Percent of Vision Area

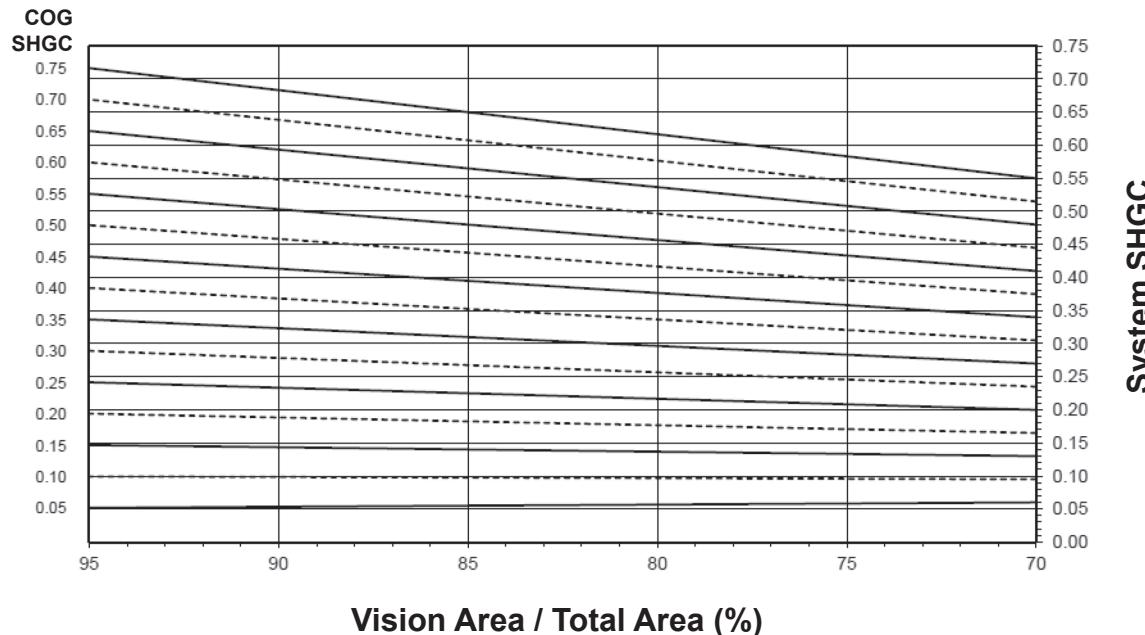

Charts are generated per AAMA 507.

System Visible Transmittance (VT) vs Percent of Vision Area

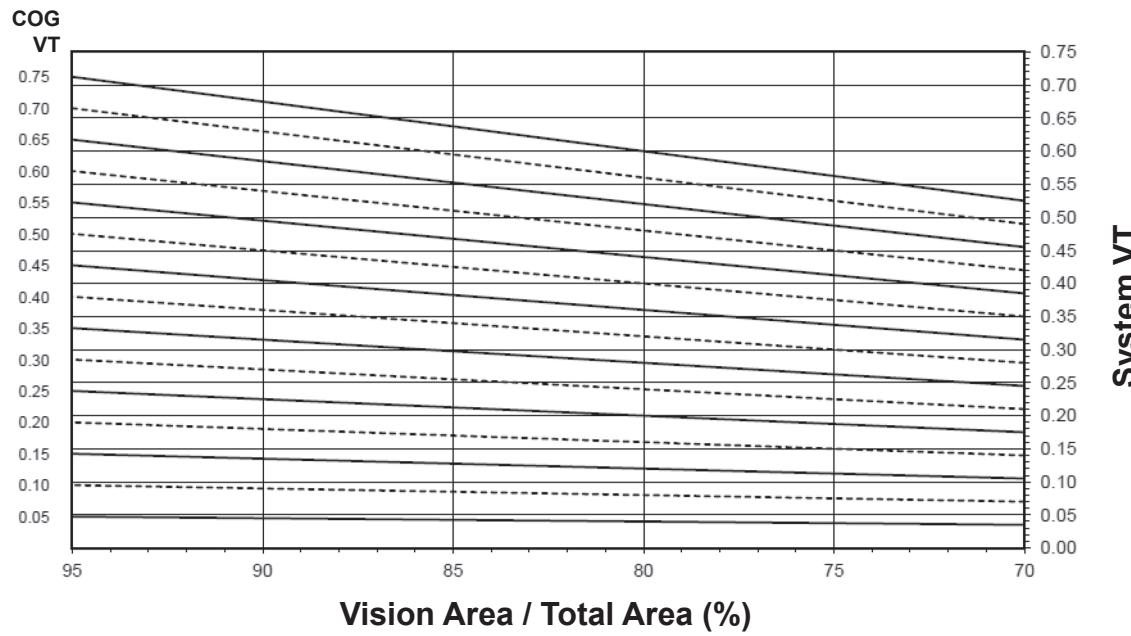

Charts are generated per AAMA 507.

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.

Thermal Transmittance ¹ (BTU/hr • ft ² • °F)

Glass U-Factor ³	Overall U-Factor ⁴
0.48	0.59
0.46	0.57
0.44	0.55
0.42	0.54
0.40	0.52
0.38	0.51
0.36	0.49
0.34	0.48
0.32	0.46
0.30	0.44
0.28	0.43
0.26	0.41
0.24	0.40
0.22	0.38
0.20	0.37

Trifab® VersaGlaze® 451T
with Steel (CENTER)
Aluminum Glazing Spacer

NOTE: For glass values that are not listed, linear interpolation is permitted.

1. U-Factors are determined in accordance with NFRC 100.
2. SHGC and VT values are determined in accordance with NFRC 200.
3. Glass properties are based on center of glass values and are obtained from your glass supplier.
4. Overall U-Factor, SHGC, and VT Matrices are based on the standard NFRC specimen size of 2,000 mm wide by 2,000 mm high (78-3/4" by 78-3/4").

SHGC Matrix ²

Glass SHGC ³	Overall SHGC ⁴
0.75	0.66
0.70	0.62
0.65	0.58
0.60	0.53
0.55	0.49
0.50	0.45
0.45	0.40
0.40	0.36
0.35	0.32
0.30	0.27
0.25	0.23
0.20	0.19
0.15	0.14
0.10	0.10
0.05	0.05

Visible Transmittance ²

Glass VT ³	Overall VT ⁴
0.75	0.65
0.70	0.61
0.65	0.57
0.60	0.52
0.55	0.48
0.50	0.44
0.45	0.39
0.40	0.35
0.35	0.31
0.30	0.26
0.25	0.22
0.20	0.17
0.15	0.13
0.10	0.09
0.05	0.04

Laws and building and safety codes governing the design and use of Kawneer products, such as glazed entrance, window, and curtain wall products, vary widely. Kawneer does not control the selection of product configurations, operating hardware, or glazing materials, and assumes no responsibility therefor.

Kawneer reserves the right to change configuration without prior notice when deemed necessary for product improvement.

© 2018, Kawneer Company, Inc.